

Low Noise, High Voltage EL Lamp Driver IC Demoboard

General Description


The Supertex HV857DB1 demoboard contains all necessary circuitry to demonstrate the features of the HV857 EL lamp driver.

Simply connect it to a power supply and a lamp. For additional assistance in designing EL driver circuits, please refer to application notes **AN-H33 (effect of external components on performance of Supertex EL drivers)** and **AN-H43 (EL lamp driver circuits to reduce audible noise)**.


Specifications

Parameter	Value
Input voltage:	1.8 to 5.0V
Typical supply current:	26mA
Lamp size:	2.6in ²
Lamp frequency:	206Hz
Converter frequency:	80kHz

Board Layout and Connection Diagram

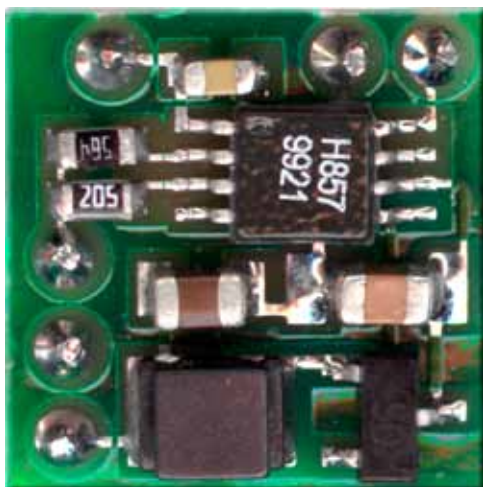

Actual Dimensions: 12mm x 12mm

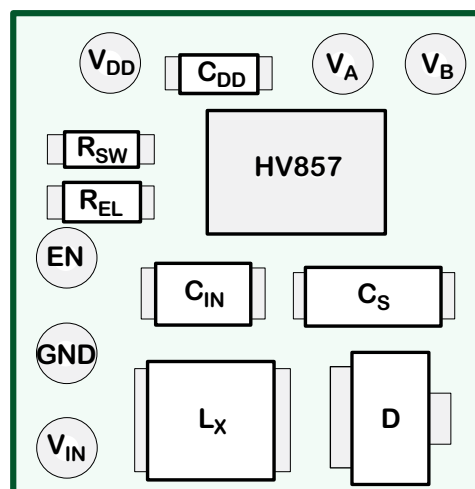

Connections:

EN - Enable Input

Enables/Disables the lamp driver. A logic high (connect to VDD) enables the driver, and a logic low (connect to GND) disables the driver. This input can be connected to a mechanical switch or to a logic circuit output that has a source impedance of less than 20kΩ.

VDD - IC Supply

Supplies the HV857 EL driver IC. The supplied circuit is optimized for 3.0V operation. The operating range can be from 1.8 to 5.0V. Connect to positive terminal of a power supply.

Note:

Make sure all the above connections are made before powering up the supply voltages.

VIN - Inductor Supply

Supplies the high voltage power converter. Connect to positive terminal of a power supply.


GND - Circuit Ground

Connect to VDD and VIN negative terminals. Supply bypass capacitor for both VDD and VIN are provided on the demo board. External supply bypass capacitors are not required.

VA and VB - Lamp Connections

Connect to an EL lamp. Polarity is irrelevant.

Schematic

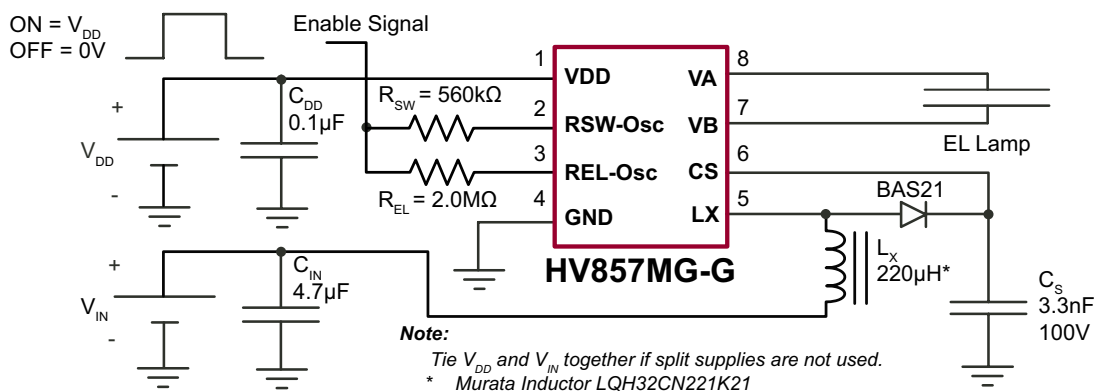

Typical Performance

Lamp Size (in ²)	$V_{DD} = V_{IN}$ (V)	I_{IN} (mA)	V_{CS} (V)	f_{EL} (Hz)	Brightness	
					ft-lm	cd/m ²
2.6	1.8	24.6	76.4	206	3.65	12.5
2.6	2.0	25.2	82.8	206	4.24	14.5
2.6	3.0	23.6	86.4	206	5.41	18.5
2.6	4.0	19.2	88.0	206	5.88	20.1
2.6	5.0	15.4	90.0	206	6.23	21.3
1.8	1.8	20.8	84.0	206	4.56	15.6
1.8	2.0	17.3	84.8	206	4.91	16.8
1.8	3.0	13.9	86.8	206	5.53	18.9
1.8	4.0	9.6	88.0	206	5.94	20.3
1.8	5.0	7.2	90.0	206	6.20	21.2

Bill of Materials

Component	Description	Package	Manufacturer	Part #
L_X	220µH Inductor	-	Murata	LQH32CN221K21
C_S	3.3nF, 100V, NPO chip capacitor	0805	Novacap	0805N332K101NT
R_{SW}	5%, 560kΩ resistor	0805	Any	---
R_{EL}	5%, 2MΩ resistor	0805	Any	---
C_{IN}	4.7µF, 10V ceramic chip capacitor	0805	Any	---
C_{DD}	0.1µF, 16V ceramic chip capacitor	0603	Any	---
Diode	250V fast recovery diode	SOT-23	Diodes Inc	BAS21
Clip	Micro alligator clip	-	Mueller	BU-34
Boot	Flexible vinly insulation	-	Mueller	BU-36-0
U1	EL driver IC	8-Lead MSOP	Supertex Inc	HV857MG-G

Supertex inc. does not recommend the use of its products in life support applications, and will not knowingly sell them for use in such applications unless it receives an adequate "product liability indemnification insurance agreement." **Supertex inc.** does not assume responsibility for use of devices described, and limits its liability to the replacement of the devices determined defective due to workmanship. No responsibility is assumed for possible omissions and inaccuracies. Circuitry and specifications are subject to change without notice. For the latest product specifications refer to the **Supertex inc.** (website: <http://www.supertex.com>)