

LOW PROFILE GENDER CHANGERS

Ideal for use where a low-profile is needed in a permanent installation (only 0.7" deep at thickest point). Gold flashed contacts. Fully shielded.

Cat. No.	Description	Net Price
45-0517-0000	DB-9 Male/Male	\$3.13
45-0518-0000	DB-9 Female/Female	3.13
45-0519-0000	DB-9 Male/Female	3.24
45-0527-0000	DB-15 Male/Male	3.34
45-0528-0000	DB-15 Female/Female	3.86
45-0507-0000	DB-25 Male/Male	3.13
45-0508-0000	DB-25 Female/Female	3.21
45-0509-0000	DB-25 Male/Female, Slim	3.66



TELCO ADAPTORS FOR DB-9 OR DB-25 PORTS

Allows use of low cost TELCO® (telephone) wire between computers and peripherals. Available in either DB-25 or DB-9 connectors on one end and 4, 6 or 8 contact Telco connectors on the other.

Cat. No.	Description	Net Price
45-5112-0000	DB-9 Female to 6 Conductor	\$2.61
45-5113-0000	DB-9 Female to 8 Conductor	2.61
45-5109-0000	DB-9 Male to 6 Conductor	2.61
45-5110-0000	DB-9 Male to 8 Conductor	2.61
45-0512-0000	DB-25 Female to 4 Conductor	3.11
45-5126-0000	DB-25 Female to 6 Conductor	2.51
45-5127-0000	DB-25 Female to 8 Conductor	2.84
45-5121-0000	DB-25 Male to 4 Conductor	2.36
45-5123-0000	DB-25 Male to 6 Conductor	2.84
45-5108-0000	Telco Adapter DB-9 Male to 4 Conductor	2.61
45-5111-0000	Telco Adapter DB-9 Female to 4 Conductor	2.61



PORT RECONFIGURATION KITS

These RS232 jumper boxes have both male & female connectors mounted on a printed circuit board with pads for soldering connections and a bus area for tying lines together. A snap-on re-usable shell is provided to protect your connections and make the unit into a permanent adapter.


Cat. No.	Description	Net Price
45-0480-0000	DB25 (M) / (F) + Hardware	\$9.21



STANDARD NULL MODEM

Standard DB-25 connectors each end, male to female. Fits in line to connect like devices, either DTE or DCE. This is the most commonly used circuit for the Null Modem Adaptors; see schematic for wiring.

Cat. No.	Description	Net Price
45-0582-0000	DB-25 Male/Female	\$3.55



RS-232 DB-25 SWITCH

One I/O DB-25 Female connects to two (A/B). Cross Switch type has four DB-25 Female connectors, two configured as Input, two as Output.

Cat. No.	Net Price
64-2001-0000	\$13.48



45-1035-0000




45-1060-0000

STANDARD "D" CONNECTORS

For cable mounting or shell may be discarded for panel mounting. All contacts molded in place permanently. Hardware included; solder connection.


Cat. No.	Description	Net Price
45-1035-0000	DB9 Male	\$2.90
45-1036-0000	DB9 Female	2.90
45-1060-0000	DB25 Male	2.90
45-1061-0000	DB25 Female	2.90



CAT 5E DATACOM PATCH AND JUMPER CABLES

Pre-made jumper cables are tested and certified to 350 MHz. All cables have snugless boots that join the connector to the cable and prevents disconnection due to accidental stresses. Connectors are plated to 50 micro-inches of gold. Cable is stranded Cat 5e (4 pair/24 AWG) UTP, meeting and tested to UL and CSA requirements.

Cat. No.	Description	Net Price
45-6860-00BU	3' snugless boot, blue	\$1.59
45-6867-00BU	7' snugless boot, blue	2.61
45-6868-00BU	14' snugless boot, blue	3.99

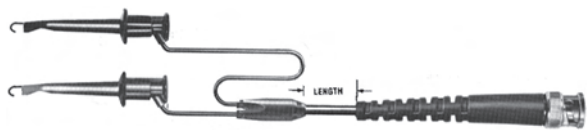

MINIGRABBER TEST CLIPS TO BNC MALE

1ST END: Minigrabber Test Clips. Contacts, beryllium copper, gold plated. Insulation, glass filled nylon. One black and one red. **CABLE:** Shielded coax., RG58C/U, 4.95 (.195) O.D. or RG174/U 2.54 (.100) O.D. Y-Mold insulation, PVC, black. **2ND END:** Crimp BNC Male. Brass body, tarnish resistant plated. Center contacts, brass, gold plated. Nominal Impedance: 50 ohms. Boot, PVC, black. **RATING:** 500 VRMS max., +50°C. (+122°F) max.


Cat. No.	Length	Net Price
5187-C-36	914.4 (36.0)	\$19.75



MINIGRABBER TEST CLIPS TO DOUBLE BANANA PLUG

1ST END: Minigrabber Test Clips. Contact, beryllium copper, gold plated. Insulation, glass filled nylon. One black and one red. **CABLE:** RG58C/U, 4.9 (.195) O.D. Y-Mold insulation, PVC, black. **2ND END:** Double Banana Plug. Brass body, beryllium copper spring, nickel plated. Insulation, polyethylene, black. **RATING:** 1400 VRMS, +50°C. (+122°F) max.

Cat. No.	Length	Net Price
3786-C-36	914.4 (36.0)	\$18.69

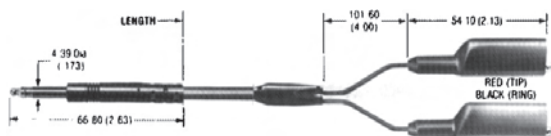

BANTAM PHONE PLUG TO ALLIGATOR CLIPS

1ST END: Miniature 3 Cond. Phone Plug. Insulation: PVC, black. Sleeve, no connection. **CABLE:** Two conductor, shielded stranded copper, 26 AWG, 4.57mm (.180) O.D. Y-Mold insulation: PVC, gray. **2ND END:** Alligator clips. Steel, nickel plated. Vinyl boots, one black and one red. **RATING:** 150V Peak, +50°C. (+122°F) max.

Cat. No.	Length	Net Price
5026-36	914.4 (36.0)	\$37.46
5026-60	1524.0 (60.0)	39.44
5026-84	2133.6 (84.0)	42.86



BANTAM PLUG PATCH CABLE, TWO CONDUCTOR WITH SHIELD

CABLE TYPE: 2 Conductor Shielded Twisted Pair, .180" O.D. **RATING:** 300 VRMS, +50°C (+122—F) Max.

Cat. No.	Length	Net Price
BRASS, UNPLATED		
4279-12	12"	\$32.80
4279-24	24"	32.80
4279-36	36"	32.80
4279-48	48"	34.97
4279-60	60"	34.97


Cat. No.	Length	Net Price
BRASS, NICKEL PLATED		
4279N-12	12"	36.09
4279N-24	24"	36.09
4279N-36	36"	36.09
4279N-48	48"	38.45
4279N-60	60"	38.45



BNC MALE EACH END

Stress-relieved/weatherproof cable assembly. **BOTH ENDS:** Crimp BNC Male. Brass body, tarnish resistant plated. Center contact, brass, gold plated. Impedance: 50 Ohms. Boot: PVC Black. **Rating:** Operating voltage: 500 VRMS max., +50°C. (+122°F) max. **CABLE:** RG58C/U coaxial cable, 4.95mm (.195) O.D., RG59B/U coaxial cable, 6.15mm (.242) O.D.


Cat. No.	Length	Net Price
RG58C/U, 50 OHMS		
2249-C-12	304.8 (12.0)	\$16.06
2249-C-24	609.6 (24.0)	16.06
2249-C-36	914.4 (36.0)	16.06
2249-C-48	1219.2 (48.0)	20.09
2249-C-60	1524.0 (60.0)	20.09
2249-C-72	1828.8 (72.0)	20.09
2249-C-120	3048.0 (120.0)	24.10
2249-C-180	4572.0 (180.0)	28.98
RG59B/U, 75 OHMS		
2249-E-60	1524.0 (60.0)	20.15
2249-E-72	1828.8 (72.0)	20.15



BNC MALE EACH END

BOTH ENDS: BNC Male. Brass body, tarnish resistant plated. Center contacts, brass, gold plated. **CABLE:** Shielded mic. 4.95mm (.195) O.D. **RATING:** Operating voltage: 500 VRMS max; +80°C. (+176°F) max. **IMPEDANCE:** 50 ohms.

Cat. No.	Length	Net Price
RG58C/U		
BNC-C-18	457.2 (18.0)	\$18.43
BNC-C-24	609.6 (24.0)	18.43
BNC-C-30	762.0 (30.0)	37.44
BNC-C-36	914.4 (36.0)	18.43
BNC-C-48	1219.2 (48.0)	20.87
BNC-C-60	1524.0 (60.0)	20.87



BNC MALE 50 OHM CABLE

CABLE TYPE: 50Ω, RG58 type .195" O.D. **RATING:** 500 VRMS, +80°C (+176°F) Max. **BNC: BODY:** Brass, Tarnish Resistant Plating. **DIELECTRIC:** PTFE. **CENTRE CONTACT:** Gold Plated Brass.

Cat. No.	Length	Net Price
5697-6	6"	\$8.63
5697-12	12"	8.63
5697-24	24"	8.63
5697-36	36"	8.63
5697-48	48"	12.52
5697-60	60"	12.52
5697-72	72"	12.52
5697-120	120"	15.15
5697-144	144"	16.46
5697-180	180"	18.43
5697-240	240"	21.72



BNC MALE WITH MOLDED STRAIN RELIEF TO MULTI-STACKING DOUBLE BANANA PLUG

CABLE TYPE: RG58C/U, .195" O.D. **RATING:** 500 VRMS, +50°C (+122°F) Max. Double Banana Plug is molded directly onto cable. **BNC: BODY:** Brass, Tarnish Resistant Plating. **DIELECTRIC:** PTFE. **CENTRE CONTACT:** Gold Plated Brass. **STRAIN RELIEF:** PVC molded directly to cable and contacts.

Cat. No.	Length	Net Price
4530-C-18	18"	\$18.31
4530-C-24	24"	18.31
4530-C-36	36"	18.31
4530-C-48	48"	20.28
4530-C-60	60"	20.28



3.5MM CABLE

3.5mm stereo plug to 3.5mm stereo jack.

Cat. No.	Length	Net Price
28-244-0	6' Length	\$1.45
28-245-0	12' Length	1.63
28-246-0	25' Length	3.75



S-VHS CABLES

Gold plated.

Cat. No.	Length	Net Price
28-306-0	6' Length	\$3.67
28-312-0	12' Length	4.33
28-325-0	25' Length	7.00



S-VHS PATCH CABLES

S-VHS + Stereo Audio extension cables, gold plated.

Cat. No.	Length	Net Price
28-320-0	6' Length	\$7.00
28-321-0	12' Length	8.67



S-VHS JOINER

Gold plated.

Cat. No.	Net Price
28-366-0	\$3.00



RCA 'Y' ADAPTER

One RCA plug to 2 RCA jacks.

Cat. No.	Net Price
27-913-0	\$1.12



STEREO AUDIO ADAPTERS

3.5mm stereo plug to 2 3.5mm stereo jacks.


Cat. No.	Net Price
27-933-0	\$1.45



STEREO AUDIO CABLES

Two RCA plugs to two RCA plugs.


Cat. No.	Description	Net Price
28-511-0	3' Long	\$1.17
28-611-0	6' Long	1.40
28-711-0	12' Long	2.08
28-811-0	20' Long	3.13



STEREO AUDIO CABLES (GOLD PLATED)

Two RCA plugs to two RCA plugs (gold plated).

Cat. No.	Description	Net Price
28-512-0	3' Long	\$1.50
28-612-0	6' Long	1.97
28-712-0	12' Long	2.42
28-812-0	20' Long	4.83



GOLD PLATED VIDEO CABLES

Gold plated video cables—two audio lines plus shielded video line.

Cat. No.	Description	Net Price
28-411-0	3' Long	\$3.58
28-412-0	6' Long	4.17
28-413-0	12' Long	5.83
28-414-0	18' Long	8.42
28-415-0	20' Long	11.33



18 GAUGE SPEAKER WIRE

500' spool of 18 gauge speaker wire. Clear jacket.

Cat. No.	Net Price
01-0244-500	\$63.33

LOCKING HARDWARE

SPECIFICATIONS:

MATERIAL:

Shell: Yellow chromate plated steel
Contacts: Brass (gold plated over nickel)
Insulator: PBT & glass-fibre re-inforced UL94V-0

ELECTRICAL:

Current rating: 5 amps
Working voltage: 125V RMS
Dielectric Strength: 1000V for 1 minute
Insulation Resistance: 1000MΩ @ 500VDC
Temperature Range: -55°C to +105°C



30-023-0



30-028-0

Cat. No.	Description	Net Price Per 100
30-023-0	Lock Posts (set of 2)	\$25.75
30-028-0	Lock Screws (set of 2)	25.75