




MAXI UNIVERSAL ADAPTER KIT

The Maxi Adapter Kit contains 2 pcs. each: BNC Male, BNC Female, TNC Male, TNC Female, SMA Male, SMA Female, "N" Male, "N" Female, UHF Male, UHF Female, Mini UHF Male, Mini UHF Female, "F" Male, "F" Female, RCA Male, RCA Female, six intermediate Couplers, one Double Banana Plug, one Double Banana Jack and one Sampler.

Cat. No.	Net Price
5748	\$316.04

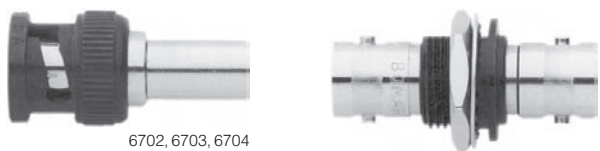

6702, 6703, 6704

6705

HIGH DEFINITION 75Ω BNC CONNECTORS

Designed for minimum return loss. Optimized for performance at HDTV and broadband frequencies. **MATERIALS:** BNC: Shell: tarnish resistant black nickel plated brass; Centre Contact: male: gold plated brass; female: gold plated beryllium copper.


Cat. No.	Type	For Cable	Net Price
6702	BNC (m)	RG59B/U, 20 AWG	\$1.52
6703	BNC (m)	RG6B/U, 18 AWG	1.52
6704	BNC (m)	RG59B/U, 23 AWG	1.47
6705	BNC (f/f)	Panel Connector	15.23



MODEL 5109 FEMALE AUDIO CONNECTOR

FEATURES: Straight cord, 3 conductor. Mates to Model #5117 wall mount male receptacle. Will accept standard 3 pin XLR male jacks. Withstands up to 45.35 Kg (100 lbs.) of pull. Durable Zinc alloy housing. Accepts up to 14 AWG wire. **MATERIALS:** Housing: Zinc or Aluminum Alloy with a nickel finish. Contacts: Copper Alloy with a silver plate finish. Barrel: Steel with nickel plating. Insulator & Bushing: Grey Elastomer. **RATINGS:** Operating Voltage: 133 VRMS/DC. Current: 15 Amps.

Cat. No.	Net Price
5109	\$3.73



MODEL 5110 MALE AUDIO CONNECTOR

FEATURES: Straight cord, 3 conductor. Withstands up to 45.35 Kg (100 lbs.) of pull. Mates to Model #5113 wall mount female receptacle. Will accept standard 3 pin XLR female jacks. Durable Zinc alloy housing. Accepts up to 14 AWG wire. **MATERIALS:** Housing: Zinc Alloy with a nickel finish. Contacts: Bronze with a tin plate finish. Cable Relief: Elastomer. Insulator: Polyester. **RATINGS:** Operating Voltage: 133 VRMS/DC. Current: 15 Amps.


Cat. No.	Net Price
5110	\$3.73



POMONA THREE XLR AUDIO CONNECTORS FOR ACCESS VIA 5-WAY BINDING POSTS

This adapter makes it easy to spit out the signals from the three XLR audio conductors for access via 5-way binding posts. RJ11 jack also simplifies connection to phone for ring down tests of audio lines for phone communications across audio cables. Includes three colour-coded 5-way binding posts for high, low, and ground terminals. Cables can be connected to rugged binding posts via banana plug, spade lugs, alligator clip, or simply fed into the through-hole or wrapped around the post.

Cat. No.	Description	Net Price
7288	XLR (M) triple binding posts to RJ11	\$63.00
7286	XLR (M) triple binding post	52.00
7289	XLR (F) triple binding post to RJ11	63.00
7287	XLR (F) triple binding post	52.00




6852

6853

AUDIO CABLE ASSEMBLIES

The Pomona 6902 Series Audio Cables provide reliable, durable audio connections with cable assemblies tested to over 100 pounds pull and up to 50,000 bends under stress. Pomona assemblies are constructed for durability, using our best XLR connectors and Belden 1172A Starquad Audio Cable for low-noise service.

Cat. No.	Description	Net Price
6902-120	XLR Plug to XLR Jack 10 ft.	\$36.01
6902-180	XLR Plug to XLR Jack 15 ft.	40.64
6902-240	XLR Plug to XLR Jack 20 ft.	45.25
6902-300	XLR Plug to XLR Jack 25 ft.	49.88



6852

6853

MODEL 6852 & 6853 XLR CONNECTORS

Pomona's rugged XLR connectors deliver dependable cable retention. The 6852 and 6853 are specially designed for strenuous use where cable separation cannot be tolerated. **FEATURES:** 3 conductor. Designed with an internal cable clamp for superior cable retention. **MATERIALS:** Body: Diecast Zinc Alloy with tarnish resistant nickel plating. Black Nickel plating for low reflection. **RATINGS:** Operating Voltage: 133 VRMS/DC. Current: 15 Amps.

Cat. No.	Description	Net Price
6852	Female Connector, 3 gold plated contacts	\$4.35
6853	Male Connector, 3 gold plated contacts	4.35



3.5MM CABLE

3.5mm stereo plug to 3.5mm stereo jack.

Cat. No.	Length	Net Price
28-244-0	6' Length	\$1.45
28-245-0	12' Length	1.63
28-246-0	25' Length	3.75



S-VHS CABLES

Gold plated.

Cat. No.	Length	Net Price
28-306-0	6' Length	\$3.67
28-312-0	12' Length	4.33
28-325-0	25' Length	7.00



S-VHS PATCH CABLES

S-VHS + Stereo Audio extension cables, gold plated.

Cat. No.	Length	Net Price
28-320-0	6' Length	\$7.00
28-321-0	12' Length	8.67



S-VHS JOINER

Gold plated.

Cat. No.	Net Price
28-366-0	\$3.00



RCA 'Y' ADAPTER

One RCA plug to 2 RCA jacks.

Cat. No.	Net Price
27-913-0	\$1.12



STEREO AUDIO ADAPTERS

3.5mm stereo plug to 2 3.5mm stereo jacks.


Cat. No.	Net Price
27-933-0	\$1.45



STEREO AUDIO CABLES

Two RCA plugs to two RCA plugs.

Cat. No.	Description	Net Price
28-511-0	3' Long	\$1.17
28-611-0	6' Long	1.40
28-711-0	12' Long	2.08
28-811-0	20' Long	3.13



STEREO AUDIO CABLES (GOLD PLATED)

Two RCA plugs to two RCA plugs (gold plated).

Cat. No.	Description	Net Price
28-512-0	3' Long	\$1.50
28-612-0	6' Long	1.97
28-712-0	12' Long	2.42
28-812-0	20' Long	4.83



GOLD PLATED VIDEO CABLES

Gold plated video cables—two audio lines plus shielded video line.

Cat. No.	Description	Net Price
28-411-0	3' Long	\$3.58
28-412-0	6' Long	4.17
28-413-0	12' Long	5.83
28-414-0	18' Long	8.42
28-415-0	20' Long	11.33



18 GAUGE SPEAKER WIRE

500' spool of 18 gauge speaker wire. Clear jacket.

Cat. No.	Net Price
01-0244-500	\$63.33

LOCKING HARDWARE

SPECIFICATIONS:

MATERIAL:

Shell: Yellow chromate plated steel
Contacts: Brass (gold plated over nickel)
Insulator: PBT & glass-fibre re-inforced UL94V-0

ELECTRICAL:

Current rating: 5 amps
Working voltage: 125V RMS
Dielectric Strength: 1000V for 1 minute
Insulation Resistance: 1000MΩ @ 500VDC
Temperature Range: -55°C to +105°C



30-023-0



30-028-0

Cat. No.	Description	Net Price Per 100
30-023-0	Lock Posts (set of 2)	\$25.75
30-028-0	Lock Screws (set of 2)	25.75