


50-901-0



50-910-0


## RELAY SOCKETS

Cat. No.	Description	Net Price
<b>OCTAL BASE SOCKET FOR 50-13X AND 50-16X SERIES</b>		
50-910-0	Octal Socket	<b>\$2.50</b>
<b>SOCKETS FOR 50-06X AND 50-09X SERIES</b>		
50-901-0	DPDT PC Mount	1.67
50-902-0	4PDT PC Mount	2.00
50-911-0	DPDT Screw Mount	4.50
50-912-0	4PDT Screw Mount	6.25



## 12VDC AUTOMOTIVE RELAYS



Cat. No.	Description	Net Price
50-836-0	SPDT 30 AMP	<b>\$2.92</b>
50-836H-0	SPDT 40 AMP	<b>3.33</b>
<b>SOCKET HOUSING FOR AUTO RELAYS</b>		
50-920-0	c/w 6 terminals	<b>.83</b>



## 3 AMP PC RELAYS

**SPECIFICATIONS:**  
**Contact Resistance:** 100mΩ max.  
**Operate Time:** 10ms max.  
**Release Time:** 5ms max.  
**Insulation Resistance:** 100MΩ min.  
**Mechanical Life:** 10M cycles  
**Electrical Life:** 500K cycles  
**Resistive Load:** 3A @ 38VDC or 120VAC

Cat. No.	Circuitry	Oper. Volt.	Coil Res.	Net Price
50-330-0	SPDT	5VDC	120Ω	<b>\$1.42</b>
50-331-0	SPDT	6VDC	180Ω	<b>1.42</b>
50-333-0	SPDT	12VDC	700Ω	<b>1.42</b>
50-334-0	SPDT	24VDC	2800Ω	<b>1.42</b>




## 1 AMP PC RELAYS (16-PIN DIP)

**SPECIFICATIONS:**  
**Contact Resistance:** 50mΩ max.  
**Operate Time:** 10ms max.  
**Release Time:** 4ms max.

**Insulation Resistance:** 100MΩ min.  
**Mechanical Life:** 100M cycles  
**Electrical Life:** 100K cycles  
**Resistive Load:** 1A @ 30VDC or .3A @ 125VAC


Cat. No.	Circuitry	Oper. Volt.	Coil Res.	Net Price
50-430-0	2C	5VDC	125Ω	<b>\$2.75</b>
50-433-0	2C	12VDC	720Ω	<b>3.33</b>
50-434-0	2C	24VDC	2880Ω	<b>3.08</b>
50-435-0	2C	48VDC	4600Ω	<b>3.00</b>

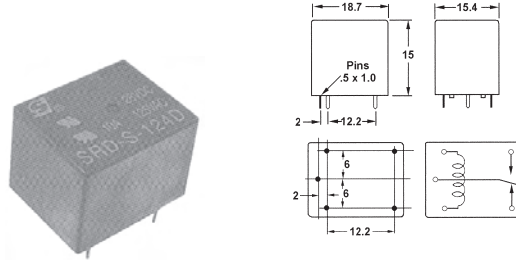

## 10 AMP PC RELAYS

**SPECIFICATIONS:**  
**Contact Resistance:** 100mΩ max.  
**Operate Time:** 8ms max.  
**Release Time:** 5ms max.  
**Insulation Resistance:** 100MΩ min.  
**Mechanical Life:** 10M cycles  
**Electrical Life:** 100K cycles  
**Resistive Load:** 10A @ 28VDC or 10A @ 125VAC  
**Inductive Load:** 3A @ 28VDC or 3A @ 125VAC

Cat. No.	Circuitry	Oper. Volt.	Coil Res.	Net Price
50-530-0	SPDT	5VDC	70Ω	<b>\$1.33</b>
50-533-0	SPDT	12VDC	400Ω	<b>1.33</b>
50-534-0	SPDT	24VDC	1600Ω	<b>1.33</b>
50-535-0	SPDT	48VDC	6400Ω	<b>1.50</b>

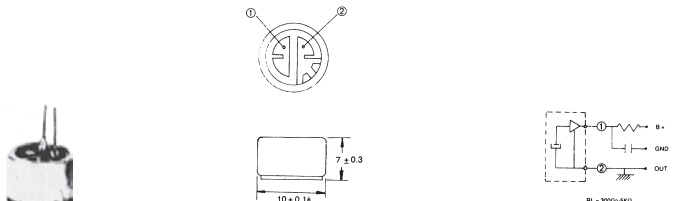

## ELECTRET MICROPHONE CARTRIDGE

**Pattern:** Omni-directional  
**Impedance:** same as load resistance.  
**Sensitivity:** -69db (Vcc=4.5V RL=1KΩ)  
**Freq. response:** 50Hz-13KHz  
**Operating voltage:** 1.5V-10 (Typ. 4.5V)  
**Current:** .6mA maximum  
**S/N ratio:** over 40db

Cat. No.	Net Price
72-160-0	<b>\$1.33</b>



70-218-0

## EARPHONES

### EARPHONES

Cat. No.	Imp.	Plug	Cord	Type	Net Price
70-216-0	8Ω	3.5mm	3' Plain, Black	Dynamic	<b>\$1.13</b>
70-217-0	8Ω	3.5mm	6' Plain, Beige	Dynamic	<b>1.30</b>
70-218-0	8Ω	3.5mm	3' Twisted, Beige	Dynamic	<b>1.55</b>
70-220-0	8Ω	2.5mm	3' Plain, Black	Dynamic	<b>1.13</b>
70-265-0	High	3.5mm	3' Plain, Beige	Crystal	<b>1.83</b>



HR-1




HR-2

## TELEX GENERAL COMMUNICATIONS HEADSETS

The HR-1 and HR-2 are medium-weight noise-reduction headsets with dynamic noise cancelling microphones, a noise reduction rating of 21 dB—suitable for use in moderately noise environments. These models feature a unique headband design that distributes ear cushion pressure evenly over the entire ear with no points, and fold into an extremely compact shape for storage. Straight cord with XLR-4 type plug.


Cat. No.	Description	Net Price
HR-1	Single-sided	\$265.06
HR-2	Dual-sided	289.15

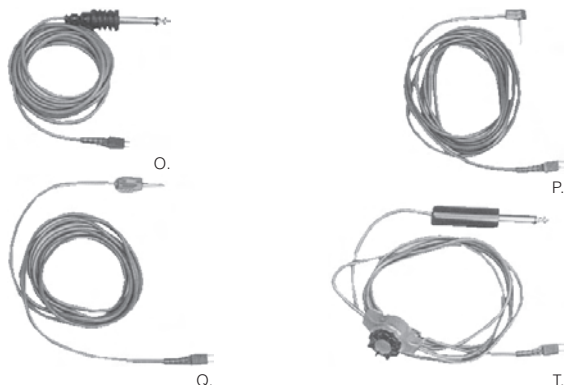

## CORDS

To minimize reflections on camera, the cord is a low lustre grey colour. Cords with or without volume control are available. The cord with in-line volume control is equipped with a clothing clip for out of sight waist level positioning. To avoid loss of cues, the volume control will not shut off completely.


Cat. No.	Description	Net Price
<b>WITHOUT VOLUME CONTROLS</b>		
CMT-2	O.—Standard ear set system cord 1/4" phone plug	\$31.33
CMT-92	P.—Straight cord with miniature right angle .140" phone plug	31.33
CMT-98	Q.—Straight cord with miniature straight .140" phone plug	31.33
<b>WITH VOLUME CONTROLS</b>		
VXT-3	T.—Volume control with clothing clip on 5' straight cord with 1/4" phone plug. 500 ohms	69.88
VYT-3	T.—Volume control with clothing clip on 5' straight cord with 1/4" phone plug. 2000 ohms	69.88
CCX-2	Coiled cord with right angle miniature connector	31.33

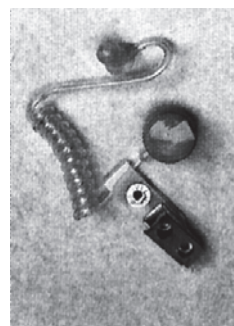

ET-2. Coiled acoustic eartube with clothing clip.

ET-4. Coiled acoustic eartube for earcones.

Cat. No.	Net Price
ET-2	\$31.33
ET-4	31.33

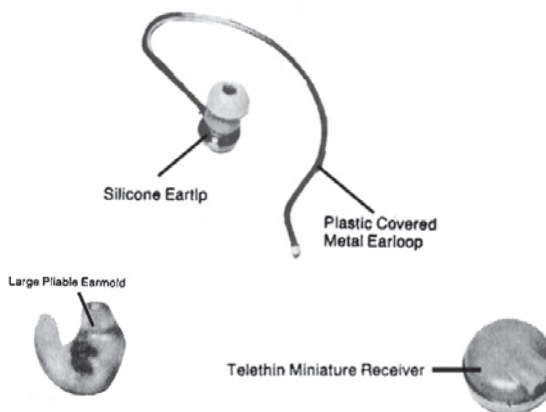

## TELEX ANNOUNCER'S EARSET COMPONENTS MIX AND MATCH COMPONENTS TO MEET YOUR NEEDS

To provide optimum versatility, the Announcer's Earset is made up of interchangeable component parts which simply snap together.

### TELETHIN MINIATURE RECEIVERS

The Telethin miniature magnetic receiver, available in five different impedances, permits choice of the appropriate impedance for any application. Extremely small and lightweight.

Cat. No.	Impedance	Net Price
RTR-04	15 Ohms	\$25.30
RTV-04	125 Ohms	25.30
RTW-04	500 Ohms	25.30
RTX-04	1000 Ohms	25.30
RTY-04	2000 Ohms	25.30

### EARMOLDS AND EARTIP

For the utmost in comfort and convenience, pliable earmolds are available for either the left or right ear. The Telethin receiver snaps into the earmold, directing sound into the ear canal and limiting ambient noise. As an alternative to the earmold, a silicone eartip which snaps into the receiver is available. A nylon or plastic covered metal earloop that holds the eartip or receiver in place on the ear can also be ordered.

Cat. No.	Description	Net Price
<b>EARMOLDS</b>		
EMM-1	Medium, Right Ear	\$20.15
EMM-2	Medium, Left Ear	20.15
<b>EARTIP</b>		
ET-1	Soft silicone tip	10.84

### EARLOOP

Fits eartip and all Telethin Receivers.

Cat. No.	Description	Net Price
AEF-2	Plastic covered metal	\$6.70
AEF-3	Nylon	9.64