

TELEX®



785L

SR785L
SR785L N-O

TELEX MODEL 785L HIGH IMPEDANCE DYNAMIC GOOSENECK PAGING MICROPHONE

A low impedance dynamic paging microphone with no switch, for hands free operation. Its die cast housing, extra strength flex arm and heavy duty mounting flange makes it one of the most rugged microphones available. Impedance: (Low) 150 to 200 ohms. Output level: (Low) -80 dB. Frequency response: 100 to 10,000 Hz. Omni-directional. 40 inches (1 meter) grey vinyl cable, 2 conductor shielded.

Cat. No.	Net Price
785L	\$184.34

TELEX SERIES SR785 HEAVY DUTY PAGING GOOSENECK MICROPHONES

Series SR785 available in three types, and are heavy-duty gooseneck paging microphones with satin chrome die cast cases. Cable extends four feet beyond extra strength mounting flange. Frequency response: 100 to 10,000 Hz. Omni-directional. Output level at 1 KHz: -80 dB re 1 volt/microbar (Low) (.1 millivolt). Rated impedance: **SR785L** (Low) 150 to 200 ohms. Low impedance with switching normally shorted in "off" position. 4 conductor, 2 shielded wiring. **SR785L N-O** (Low) 150 to 200 ohms. Low impedance, with normally "open" switching. 4 conductor, 2 shielded wiring.

Cat. No.	Net Price
SR785L	\$215.66
SR785L N-O	203.61



TELEX MODEL 253 SINGLE-ZONE DESKTOP PAGING MICROPHONE

A low-impedance single-zone paging desk microphone. Microphone housing is constructed of strong, one-piece, die-cast zinc alloy with grey powder coat finish. 253 is equipped with a 4-conductor, 2-shield cable to allow for external relay operation. Also equipped with a front press-to-talk bar with a locking bar lever on the side of the base. Rugged yet sensitive, the 253 should be used with amplifiers that have input impedance of 50 to 250 ohms. Element: Dynamic. Response: 60Hz-10kHz. Polar pattern: Omnidirectional. Output level: -59 dB. Size: 7.75" H x 4" W x 5.5" D. Weight: 2 lbs (0.9 kg). **Model 752** is a low-impedance, cardioid microphone for single-zone paging. Equipped with two double-pole, single-throw leaf switches for either push-to-talk or lift-to-talk operation.

Cat. No.	Net Price
253	\$224.09
752	155.00



TELEX 610 MAGNETIC EDUCATIONAL HEADPHONE

Features a unique snap-fit, plug-in cord that can be replaced easily and in a matter of minutes by the teacher. In spite of the ease in replacing the cord, this feature is not obvious to the student. And replacement cords are inexpensive, so a school can afford to have a supply on hand and never wait for parts. Other features include construction of impact plastic and stainless steel enabling the 610 to stand up to continuous daily use. It's designed to resist shock and moisture. Magnetic elements accurately reproduce sound and the stainless steel diaphragm is virtually puncture proof. The spring steel headbands are sheathed in vinyl and allow for ample adjustment. Circumaural earcushions are removable for cleaning, lock in sound and give the student a comfortable fit for hours of convenient listening. Frequency Response: 40-10,000 Hz. useable. Impedance: 600 ohms. Cord 5 ft. (1.52m). Plug 0.25" (6.35mm). Stock color brown.

Cat. No.	Description	Net Price
610-41	Headphone	\$16.63



PH-1



PH-2

TELEX PH-1, PH-2 AND PH-10 COMMUNICATIONS HEADSETS

Headsets with foam-filled cushions effectively reduces ambient noise. Dynamic, monaural earphones with dynamic noise cancelling microphone attached to a continuously adjustable ball joint. Straight cord with clothing clip and XLR-4 type plug.

Cat. No.	Description	Net Price
PH-1	Single-sided	\$210.84
PH-2	Dual-sided	259.03
PH-16	Dual-sided, hearing protected type	294.32


ORDER ON-LINE VISIT
WWW.E-SONIC.COM




SPT15A, SPT30A
SP158A, SP308A



BDT30A



SPT5A
SP58A

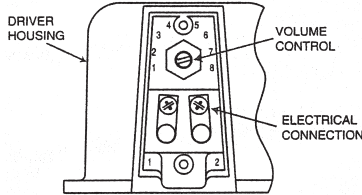

VOLUME CONTROL: SPT5A, SPT15A, SPT30A
AND BDT30A (ONLY)

BOGEN LOUDSPEAKERS

Bogen's horn loudspeakers offer high efficiency, excellent intelligibility. And sturdy, all metal construction. Tilt and swivel base, and rotary switch selected power taps, make installation quick and easy. SPT and BDT models are compatible with 70V and 25V paging systems, SP models are 8-ohm versions. **FEATURES:** Rotary switch-selected power taps on transformer models. Constant voltage (70V/25V) and 8-ohm versions. Tilts and swivel base for easy aiming. All metal construction with enamel finish. Weatherproof design. 12" connecting cable included for installation (SP58A, SPT5A only). Twin re-entrant horns for bi-directional projection (BDT30A only).

Cat. No.	Watts	Frequency Response	Max Sound Level (dBspl)**	Dimensions	Net Price
SCREW TERMINALS					
SPT15A	15	275Hz-14kHz	121	9" Dia. x 9-1/4" D	\$96.41
SP158A*					94.52
SP308A*					126.03
BDT30A	30	225Hz-14kHz	121***	16-1/2" Dia. x 9-3/4" D***	204.00
WIRE TERMINALS					
SPT5A	7.5	250Hz-14kHz	105	6" Dia. x 4" D	83.52

*8-ohm impedance. **dBspl@full power/4ft. ***Each horn.



BOGEN DYNAMIC DESKTOP MICROPHONE

The DDU250 is a high-quality, dynamic, gooseneck desktop microphone ideal for any PA system. The gooseneck permits the user to adjust the microphone's angle and height to suit the user's needs. **FEATURES:** Cardioid pickup pattern. Push-to-lock and push-to-talk switches. Excellent speech intelligibility with low ambient noise. Effective feedback control. 16" long, fully flexible gooseneck stalk shock-mounted to a heavy zinc die-cast base. 10 ft. cable with external contact closure outputs for the talk switches. 500-ohm impedance. Frequency response range of 100 Hz - 12 kHz. Sensitivity of -76 dB +/- 3 dB.


Cat. No.	Net Price
DDU-250	\$189.09



BOGEN INDUSTRIAL GOOSENECK MICROPHONE

The MGN19 is a dynamic, push-button activated microphone designed for all industrial and commercial public address and paging applications. **FEATURES:** Omni-directional pick-up pattern. Rugged, reliable design for quality, long-term use under strenuous handling conditions. 400-ohm impedance. Frequency response range of 50Hz - 12 kHz, w/2kHz boost. Sensitivity of -76dB +/-3dB. Push-to-talk switch on MIC housing. Chrome-plated screen and gooseneck with black Cycolac housing. 9 ft. cable included. 19" flexible neck with mounting flange. Size: 23-1/2" L x 1-1/4" dia. Weight: 1.25 lbs.

Cat. No.	Net Price
MGN19	\$145.55



BOGEN HANDS FREE
ANALOG DOOR PHONE

BOGEN ANALOG DOOR PHONE

Bogen's Door Phone provides convenient remote, hands-free two-way communication. Between two locations. Durable, weather-resistant, stainless steel construction protect against vandals and varying weather conditions. **FEATURES:** Suitable for indoor or outdoor station, door, or gate communication. Secure entry access to commercial, industrial or residential locations. Pushbutton initiates the call at remote location. Connect directly to an analog PABX/KSU station programmed for ringdown operation. Adjustable microphone and speaker volume. Adjustable call timeout (15 seconds to 2 minutes). Call limit timer can be disabled. Responds to CPC pulses. Auto-answer features allows monitoring of remote location. Hands-free communication. Power by telephone line; no power supply needed. Brushed stainless steel face plate with mounting gasket and heavy-duty call button. Dimensions: 5" W x 5" H x 2-1/4" D. Weight: 4 lbs.

Cat. No.	Net Price
ADP1	\$385.00

1-800-56-SONIC
www.e-sonic.com

SHURE®



SHURE CARDIOID DYNAMIC VOCAL MICROPHONES

A rugged microphone tuned to accentuate the clarity of lead and back-up vocal applications.

Cat. No.	Description	Net Price
PG58-QTR	Includes: on/off switch, XLR to 1/4" cable and pouch with clip.	\$140.43
PG58-XLR	Includes: on/off switch, XLR to XLR cable and pouch with clip.	140.43



SHURE CARDIOID DYNAMIC VOCAL MICROPHONES

A great microphone for speech and karaoke applications.


Cat. No.	Description	Net Price
PG48-QTR	Includes: on/off switch, XLR to 1/4" cable and pouch with clip.	\$90.21
PG48-XLR	Includes: on/off switch, XLR to XLR cable and pouch with clip.	90.21



SHURE CARDIOID DYNAMIC MICROPHONE

On/off switch, XLR 1/4" cable, black handle and silver grill, Spotlight™ packaging.

Cat. No.	Net Price
C606	\$64.64

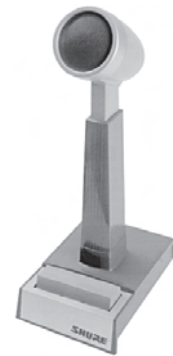

SHURE SERIES II OMNIDIRECTIONAL DYNAMIC, HIGH AND LOW Z, DESKTOP MICROPHONE

A rugged, high output push-to-talk microphone designed for optimum speech intelligibility. Radio dispatch, paging, and dispatch applications.

Cat. No.	Net Price
450SERIEII	\$160.89



SHURE CARDIOID CONDENSER GOOSENECK MICROPHONES

An ideal miking solution for podium and lecterns. Suitable for speech and vocal sound reinforcement and recording. Board room, conference room, classroom, and house of worship applications. Included: attached XLR preamp, locking flange mount, and foam windscreen. Colour: charcoal grey.

Cat. No.	Description	Net Price
EZG-12	12" gooseneck	\$205.53
EZG-18	18" gooseneck	205.53



SHURE OMNIDIRECTIONAL DYNAMIC, HANDHELD MICROPHONES

An extremely reliable push-to-talk microphone with a clear, crisp, and natural voice response. Modular construction allows for easy field serviceability. Radio communication, voice recognition, paging, talkback, and public address appli-

Cat. No.	Description	Net Price
527B	Low Z	\$104.16
527C	Built-in transistor amplifier	115.32