


50-901-0



50-910-0


RELAY SOCKETS

Cat. No.	Description	Net Price
OCTAL BASE SOCKET FOR 50-13X AND 50-16X SERIES		
50-910-0	Octal Socket	\$2.50
SOCKETS FOR 50-06X AND 50-09X SERIES		
50-901-0	DPDT PC Mount	1.67
50-902-0	4PDT PC Mount	2.00
50-911-0	DPDT Screw Mount	4.50
50-912-0	4PDT Screw Mount	6.25



12VDC AUTOMOTIVE RELAYS



Cat. No.	Description	Net Price
50-836-0	SPDT 30 AMP	\$2.92
50-836H-0	SPDT 40 AMP	3.33
SOCKET HOUSING FOR AUTO RELAYS		
50-920-0	c/w 6 terminals	.83



3 AMP PC RELAYS

SPECIFICATIONS:
Contact Resistance: 100mΩ max.
Operate Time: 10ms max.
Release Time: 5ms max.
Insulation Resistance: 100MΩ min.
Mechanical Life: 10M cycles
Electrical Life: 500K cycles
Resistive Load: 3A @ 38VDC or 120VAC

Cat. No.	Circuitry	Oper. Volt.	Coil Res.	Net Price
50-330-0	SPDT	5VDC	120Ω	\$1.42
50-331-0	SPDT	6VDC	180Ω	1.42
50-333-0	SPDT	12VDC	700Ω	1.42
50-334-0	SPDT	24VDC	2800Ω	1.42




1 AMP PC RELAYS (16-PIN DIP)

SPECIFICATIONS:
Contact Resistance: 50mΩ max.
Operate Time: 10ms max.
Release Time: 4ms max.

Insulation Resistance: 100MΩ min.
Mechanical Life: 100M cycles
Electrical Life: 100K cycles
Resistive Load: 1A @ 30VDC or .3A @ 125VAC


Cat. No.	Circuitry	Oper. Volt.	Coil Res.	Net Price
50-430-0	2C	5VDC	125Ω	\$2.75
50-433-0	2C	12VDC	720Ω	3.33
50-434-0	2C	24VDC	2880Ω	3.08
50-435-0	2C	48VDC	4600Ω	3.00

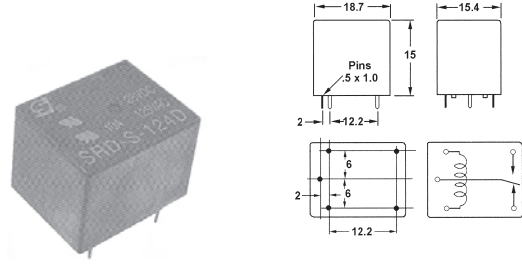

10 AMP PC RELAYS

SPECIFICATIONS:
Contact Resistance: 100mΩ max.
Operate Time: 8ms max.
Release Time: 5ms max.
Insulation Resistance: 100MΩ min.
Mechanical Life: 10M cycles
Electrical Life: 100K cycles
Resistive Load: 10A @ 28VDC or 10A @ 125VAC
Inductive Load: 3A @ 28VDC or 3A @ 125VAC

Cat. No.	Circuitry	Oper. Volt.	Coil Res.	Net Price
50-530-0	SPDT	5VDC	70Ω	\$1.33
50-533-0	SPDT	12VDC	400Ω	1.33
50-534-0	SPDT	24VDC	1600Ω	1.33
50-535-0	SPDT	48VDC	6400Ω	1.50

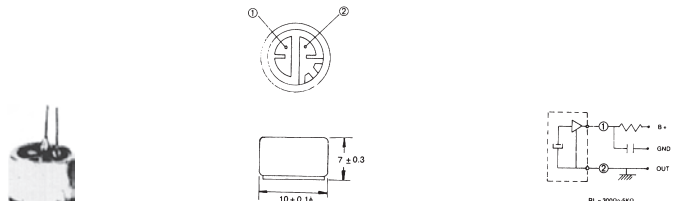

ELECTRET MICROPHONE CARTRIDGE

Pattern: Omni-directional
Impedance: same as load resistance.
Sensitivity: -69db (Vcc=4.5V RL=1KΩ)
Freq. response: 50Hz-13KHz
Operating voltage: 1.5V-10 (Typ. 4.5V)
Current: .6mA maximum
S/N ratio: over 40db

Cat. No.	Net Price
72-160-0	\$1.33



70-218-0

EARPHONES

Cat. No.	Imp.	Plug	Cord	Type	Net Price
70-216-0	8Ω	3.5mm	3' Plain, Black	Dynamic	\$1.13
70-217-0	8Ω	3.5mm	6' Plain, Beige	Dynamic	1.30
70-218-0	8Ω	3.5mm	3' Twisted, Beige	Dynamic	1.55
70-220-0	8Ω	2.5mm	3' Plain, Black	Dynamic	1.13
70-265-0	High	3.5mm	3' Plain, Beige	Crystal	1.83



KÖNIG & MEYER MICROPHONE STANDS

Microphone stand, folding legs with boom, zinc die-cast base.

Cat. No.	Description	Net Price
210/6	Height: 925/1630 mm. Boom arm length: 805 mm-nickel	\$73.50
210/6-BLACK	Height: 925/1630 mm. Boom arm length: 805 mm-black	73.50



KÖNIG & MEYER TABLE MICROPHONE STANDS

Small, lightweight stand, plastic base with folding nickel plated legs, 3/8" thread. Height: 60 mm.

Cat. No.	Net Price
231/1	\$11.75



KÖNIG & MEYER TABLE MICROPHONE STAND WITH SCREW-IN ROD

Sound-absorbing cast-iron base with nickel plated screw-in rod, 3/8" thread. Height: 175 mm. Base diameter: 130 mm.

Cat. No.	Net Price
232	\$39.25



LITTLITE HIGH INTENSITY GOOSENECK LAMP

Littlite comes complete with bulb, chassis, 6 foot cord, and adjustable dimmer.

Cat. No.	Description	Net Price
L-3/12	12 inch gooseneck	\$83.00
L-3/18	18 inch gooseneck	83.00

ACCESSORIES

WB	Weighted base	20.00
Q5	5W halogen replacement bulb	12.00