

## Moody® TOOLS, INC.



### ACU-MIN® MACHINIST SCRIBER

Bent and straight points are hardened, alloy steel. Hook is mild steel. Lightweight, 1/4" diameter knurled handle for sure grip. Hook point is perfect for oil seal removal and spring adjustment. Overall length of fixed point models is 8". Overall length of threaded point model is 8-1/2".


Cat. No.	Description	Net Price
51-1510	Fixed Straight/90° Bend	\$4.44
51-1511	Fixed Straight/Hook	4.58



### ACU-MIN® PIN VISE

This hand held individual pin vise is specifically designed for fine hand held work. Each pin vise has a 1/4" diameter, lightweight, knurled handle with Swivl-top™. Chuck capacity of .000" to .031". Overall length 1-3/4".

Cat. No.	Net Price
51-1506	\$9.66

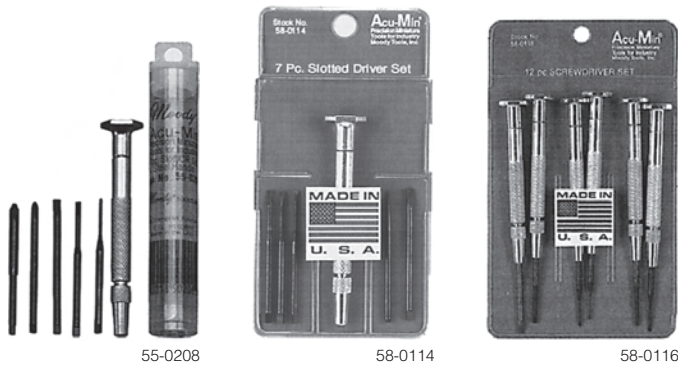

55-0208

58-0114

58-0116

### ACU-MIN® MINIATURE SCREWDRIVER SETS

Traditional Jewelers screwdriver sets include steel swivel-top handles and interchangeable blades of hardened, blackened steel. Overall length of drivers is 4". Packed in vinyl pouches.


Cat. No.	Description	Net Price
58-0114	7pc. Single Handle Slotted Set. Sizes: Slotted .025", .040", .055", .070", .080", .100"	\$11.83
58-0116	12pc. Multi Handle Slotted Set. Sizes: .025", .040", .055", .070", .080", .100"	23.47
58-0208	7pc. Single Handle Slotted/Cross Recess Set. Sizes: Slotted .040", .070", .100", Phillips #0, #1 and JIS Type-S #0	14.60
58-0143	9pc. Single Handle Open End Wrench Set. Sizes: 5/64", 3/32", 7/64", 1/8", 5/32", 3/16", 1/4", and 5/16"	14.22



### ACU-MIN® FIVE PIECE SCRIBER/PICK SET

Set contains four interchangeable threaded hardened alloy steel points and one aluminum handle. Points are 90° Bend, Offset Angle, Straight and Hook. Overall length of assembled scribers are 7.5". Packed in a vinyl pouch.

Cat. No.	Description	Net Price
58-0223	Set without magnetic handle	\$8.82
58-0224	Set with magnetic handle	10.30

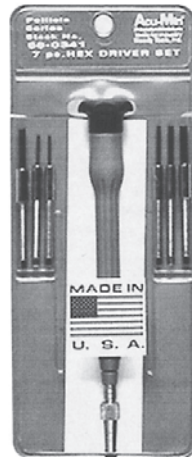

SINGLE HANDLE SET



MULTI HANDLE SET

### ESD SAFE SLOTTED SCREWDRIVER SETS

Sets include hardened steel screwdriver blades and one interchangeable ESD-Safe handle with ergonomic swivel top. Overall length of assembled driver is 5.8". Packed in vinyl pouches.

Cat. No.	Description	Net Price
58-0314	7pc. Slotted Set. Sizes: .025", .040", .055", .070", .080" and .100"	\$13.93
58-0378	7pc. Sm. Star Set. Size: T-1, T-2, T-3, T-4, T-5 and T-6	38.00

### ESD SAFE SLOTTED SCREWDRIVER SETS

Sets includes six screwdrivers with hardened steel screwdriver blades molded into ergonomic, ESD-Safe handles with swivel tops. Overall length of drivers is 4.9". Packed in a vinyl pouch.

Cat. No.	Description	Net Price
58-0316	6pc. Slotted Set. Sizes: .025", .040", .055", .070", .080" and .100"	\$28.88

## ECLIPSE



70-675R

### ECLIPSE JUNIOR HACKSAW

The 675 hacksaw has been specially developed to provide the handyman and professional with the best means of coping with those small and tricky sawing applications. The handle is injection moulded from tough durable 33% glass filled nylon and is strong, light and unbreakable in normal use. The rigid chrome plated rectangular section steel bow is permanently locked into the handle and designed to take the standard 6 inch junior saw blade which may be easily fitted, accurately aligned and tensioned for longer blade life.

Cat. No.	Description	Net Price
70-675R	Junior Hacksaw	\$12.67
71-132R	Replacement Blade, 32 Teeth Per Inch	2.49



### ECLIPSE AUTOMATIC CENTRE PUNCH

Delivers a punch when hand pressure applied to knurled head. One handed operation, hammering is not required and would damage the mechanism. Depth of impression adjusted by turning knurled head. Operating pressure range: 30-5 lbs. Length: 4-11/16" (120mm).


Cat. No.	Net Price
65-171R	\$27.06



### ECLIPSE ENGINEERS SCRIBER

A popular double ended engineers scriber for general purpose use. Suitable for marking in confined spaces, grooves, etc. Overall length: 7 1/2".

Cat. No.	Net Price
E222	\$7.76



### ECLIPSE SCREW PITCH GAUGES

A range of accurately milled gauges designed to check internal and external thread forms.

Cat. No.	Number of Blades	Screw Pitch Threads Per Inch	Net Price
806	30	4, 4 1/2, 5, 5 1/2, 6, 7, 8, 9, 10, 11, 11 1/2, 12, 13, 14, 15, 16, 18, 20, 22, 24, 26, 27, 28, 30, 32, 34, 36, 38, 40, 42	\$31.34

Cat. No.	Number of Blades	Screw Pitch Threads Per mm	Net Price
801	30	3.0, 2.5, 2.0, 1.9, 1.8, 1.75, 1.7, 1.6, 1.5, 1.4, 1.3, 1.25, 1.2, 1.1, 1.0, 0.9, 0.85, 0.8, 0.75, 0.7, 0.65, 0.6, 0.55, 0.5, 0.45, 0.4, 0.35, 0.3, 0.25	\$31.44



### ECLIPSE JEWELLERS SCREWDRIVER SET

Designed to carry out fine, delicate work by toolmakers, jewellers, watchmakers, instrument engineers, and opticians. Blade sizes match all commonly used slotted screws.

Cat. No.	Description	Net Price
777/2	Pocket set containing one screwdriver body and six interchangeable blades with widths from 0.6mm (0.025") to 2.5mm (0.100"). Overall length when fitted with blade: 4-5/16"	\$32.35



### ECLIPSE CHUCK TYPE TAP WRENCH

These tools are designed to hold engineer taps. By selecting the most suitable type and size, it is possible to tap a hole more effectively and minimize risk of tap breakage. With carefully designed collet and jaws, case hardened to give lasting wear. All sizes of taps are held firmly and rigidly during use.

Cat. No.	Description	Net Price
E141	For tap sizes 4 and 6	\$16.53
E142	For tap sizes 4, 6, 8, and 10	17.31



### ECLIPSE PIN CHUCKS

The pin chuck is gripped in the larger chuck on a machine enabling very small drills to be used. Complete with 3 interchangeable collets with capacity ranging from 0.01" to 0.1".

Cat. No.	Net Price
160	\$33.62

## ECLIPSE MAGNETICS



### ECLIPSE MINOR MAGNETS

**FEATURES:** Material: Alnico. Maximum temperature: 550°C. Commonly used for attracting, holding, clamping, and securing steel parts. Educational use as well as an inspection magnet, holding stencils, and paint masks. Useful where air gaps are present due to deep flux field.

Cat. No.	Height (Inches)	Width (Inches)	Pole Gap (Inches)	Thickness (Inches)	Max. Pull (Lbs.)	Net Price
E801	7/16	7/8	1/4	5/16	2.0	\$4.42



### ECLIPSE POCKET MAGNETS

**FEATURES:** Material: Alnico. Maximum temperature: 550°C. Commonly used for attracting, holding, clamping, and securing steel parts. Useful in testing for ferrous components (i.e. steel/aluminum can sorting). Useful where air gaps are present due to deep flux field.

Cat. No.	Length of Pole Face (Inches)	Height (Inches)	Width (Inches)	Gap (Inches)	Max. Pull (Lbs.)	Net Price
E802	7/8	1	5/16	1/4	5.3	\$4.83