

Hammond Industrial Wallmount Enclosures

MANU
195
CODE

NEMA 4 SINGLE DOOR ENCLOSURES—GREY

Cat. No.	Dimensions			Optional Inner Panel	Net Price
	H	W	D		
EN4SD20168GY	20	16	8	EP2016	\$289.15
EN4SD20208GY	20	20	8	EP2020	312.55
EN4SD20248GY	20	24	8	EP2024	345.55
EN4SD24168GY	24	16	8	EP2416	309.24
EN4SD24208GY	24	20	8	EP2420	335.80
EN4SD24248GY	24	24	8	EP2424	362.49
EN4SD24308GY	24	30	8	EP2430	402.49
EN4SD30208GY	30	20	8	EP3020	381.38
EN4SD30248GY	30	24	8	EP3024	402.49
EN4SD30308GY	30	30	8	EP3030	449.95
EN4SD36248GY	36	24	8	EP3624	442.42
EN4SD36308GY	36	30	8	EP3630	497.42
EN4SD36368GY	36	36	8	EP3636	552.40
EN4SD161210GY	16	12	10	EP1612	244.51
EN4SD161610GY	16	16	10	EP1616	261.65
EN4SD162010GY	16	20	10	EP1620	281.49
EN4SD201610GY	20	16	10	EP2016	281.49
EN4SD202010GY	20	20	10	EP2020	304.80
EN4SD202410GY	20	24	10	EP2024	326.93
EN4SD241610GY	24	16	10	EP2416	301.11
EN4SD242010GY	24	20	10	EP2420	328.00
EN4SD242410GY	24	24	10	EP2424	354.29
EN4SD243010GY	24	30	10	EP2430	392.55
EN4SD302010GY	30	20	10	EP3020	361.75
EN4SD302410GY	30	24	10	EP3024	393.55
EN4SD303010GY	30	30	10	EP3030	439.93
EN4SD362410GY	36	24	10	EP3624	433.00
EN4SD363010GY	36	30	10	EP3630	486.18
EN4SD363610GY	36	36	10	EP3636	539.36
EN4SD423610GY	42	36	10	EP4236	612.38
EN4SD482410GY	48	24	10	EP4824	650.49
EN4SD483610GY	48	36	10	EP4836	667.04
EN4SD603610GY	60	36	10	EP6036	777.15
EN4SD202012GY	20	20	12	EP2020	345.95
EN4SD242012GY	24	20	12	EP2420	383.20
EN4SD242412GY	24	24	12	EP2424	402.49
EN4SD302412GY	30	24	12	EP3024	447.53
EN4SD303012GY	30	30	12	EP3030	499.89
EN4SD362412GY	36	24	12	EP3624	506.76
EN4SD363012GY	36	30	12	EP3630	552.40
EN4SD363612GY	36	36	12	EP3636	612.38
EN4SD423612GY*	42	36	12	EP4236	672.95
EN4SD482412GY*	48	24	12	EP4824	599.20
EN4SD483612GY*	48	36	12	EP4836	732.78
EN4SD242416GY	24	24	16	EP2424	455.33
EN4SD363016GY	36	30	16	EP3630	624.95
EN4SD483616GY*	48	36	16	EP4836	805.38
EN4SD242420GY	24	24	20	EP2424	496.35
EN4SD302420GY	30	24	20	EP3024	553.07
EN4SD363020GY	36	30	20	EP3630	681.69

NOTE: Inner panel not included—order separate.
*Diecast key lockable handle with black epoxy finish on 3 point latch.



NEMA 4, 4X STAINLESS STEEL SINGLE DOOR ENCLOSURES

FEATURES:

- NEMA 4/4X stainless steel enclosures are designed to enclose electrical and/or electronic equipment and protect against harsh, industrial environments.
- Cover and enclosure are natural 304 stainless steel with a smoothed brushed finish.
- Doors are easily removed for modifications and are interchangeable.
- Panel mounting hardware is included.
- Hinges, hinge pins and quarter turns are stainless steel.



Cat. No.	Dimensions			Optional Inner Panel	Net Price
	H	W	D		
EN4SD12126SS	12	12	6	EP1212	\$660.44
EN4SD16126SS	16	12	6	EP1612	724.53
EN4SD16166SS	16	16	6	EP1616	803.87
EN4SD20166SS	20	16	6	EP2016	908.29
EN4SD20206SS	20	20	6	EP2020	1002.93
EN4SD16208SS	16	20	8	EP1620	974.40
EN4SD20168SS	20	16	8	EP2016	947.25
EN4SD20208SS	20	20	8	EP2020	1046.09
EN4SD24168SS	24	16	8	EP2416	1032.87
EN4SD24208SS	24	20	8	EP2420	1145.62
EN4SD24248SS	24	24	8	EP2424	1259.76
EN4SD30248SS	30	24	8	EP3024	1429.58
EN4SD30308SS	30	30	8	EP3030	1678.75
EN4SD36248SS	36	24	8	EP3624	1646.04
EN4SD36308SS	36	30	8	EP3630	1887.55
EN4SD363612SS	36	36	12	EP3636	2323.95
EN4SD423612SS	42	36	12	EP4236	2580.07
EN4SD483612SS	48	36	12	EP4836	2836.20

NOTE: Inner panel not included—order separate.



NEMA 4 WINDOW DOOR ENCLOSURES

FEATURES:

- Designed to enclose electrical and/or electronic equipment where viewing of component operation is necessary while maintaining protection ratings.
- Full view UV resistant polycarbonate window allow maximum viewing area of inner panel.
- Doors may be easily removed and are interchangeable. All window door latch types are quarter turn.
- Panel mounting hardware is included.
- The RAL7032 beige version includes a removable steel gland plate which covers the cutouts in bottom allowing easy cable entry.
- Quarter turn latches formed from mild steel.
- Stainless steel hinge with stainless steel pins.
- Finished in RAL7032 beige or ANSI/ASA61 grey powder paint.



Cat. No.	Dimensions			Optional Panel	Net Price
	H	W	D		
NEMA 4—BEIGE					
EN4SD16126WCG	16	12	6	EP1612	\$342.11
EN4SD20166WCG	20	16	6	EP2016	394.89
EN4SD20206WCG	20	20	6	EP2020	426.02
EN4SD24206WCG	24	20	6	EP2420	457.22
EN4SD24246WCG	24	24	6	EP2424	493.11
EN4SD16128WCG	16	12	8	EP1612	358.73
EN4SD20168WCG	20	16	8	EP2016	416.47
EN4SD20208WCG	20	20	8	EP2020	450.09
EN4SD24208WCG	24	20	8	EP2420	483.64
EN4SD24248WCG	24	24	8	EP2424	521.96
EN4SD30248WCG	30	24	8	EP3024	579.69
EN4SD202012WCG	20	20	12	EP2020	498.02
EN4SD242012WCG	24	20	12	EP2420	536.40
EN4SD242412WCG	24	24	12	EP2424	579.69
EN4SD302412WCG	30	24	12	EP3024	644.51
EN4SD242416WCG	24	24	16	EP2424	637.25
EN4SD242420WCG	24	24	20	EP2424	695.13
EN4SD302420WCG	30	24	20	EP3024	775.13

NEMA 4/4X STAINLESS STEEL

FEATURES:

- NEMA 4/4X stainless steel
- Natural stainless steel with a smoothed brushed finish.
- Stainless steel hinges, hinge pins and quarter turns.

Cat. No.	Dimensions			Optional Panel	Net Price
	H	W	D		
EN4SD16126WSS	16	12	6	EP1612	\$1039.82
EN4SD20166WSS	20	16	6	EP2016	1260.45
EN4SD20206WSS	20	20	6	EP2020	1379.47
EN4SD20168WSS	20	16	8	EP2016	1347.45
EN4SD20208WSS	20	20	8	EP2020	1482.47
EN4SD24208WSS	24	20	8	EP2420	1634.22
EN4SD24248WSS	24	24	8	EP2424	1786.64
EN4SD30248WSS	30	24	8	EP3024	2042.76

NOTE: Inner panel not included—order separate.

NEMA 4—GREY

FEATURES:

- NEMA 4
- Finished in grey (GY) powder paint
- Zinc plated hinge pins, stainless steel hinges, and mild steel quarter turns.

Cat. No.	Dimensions			Optional Panel	Net Price
	H	W	D		
EN4SD16126WGY	16	12	6	EP1612	\$342.11
EN4SD20166WGY	20	16	6	EP2016	394.89
EN4SD20206WGY	20	20	6	EP2020	426.02
EN4SD24206WGY	24	20	6	EP2420	457.22
EN4SD24246WGY	24	24	6	EP2424	493.11
EN4SD16128WGY	16	12	8	EP1612	358.73
EN4SD20168WGY	20	16	8	EP2016	416.47
EN4SD20208WGY	20	20	8	EP2020	450.09
EN4SD24208WGY	24	20	8	EP2420	483.64
EN4SD24248WGY	24	24	8	EP2424	521.96
EN4SD30248WGY	30	24	8	EP3024	579.69
EN4SD202012WGY	20	20	12	EP2020	498.02
EN4SD242012WGY	24	20	12	EP2420	536.40
EN4SD242412WGY	24	24	12	EP2424	579.69
EN4SD302412WGY	30	24	12	EP3024	644.51
EN4SD242416WGY	24	24	16	EP2424	637.25
EN4SD242420WGY	24	24	20	EP2424	695.13
EN4SD302420WGY	30	24	20	EP3024	775.13

NOTE: Inner panel not included—order separate.



INNER PANEL

FEATURES:

- Larger than standard NEMA panel used in same sized enclosure.
- Larger sizes have 2 or 4 formed flanges for added strength.
- Slotted corner design for easier mounting.
- Finished in white or unpainted galvanized.

STEEL PANEL

Cat. No.	Dimensions			Gauge	Net Price
	H	W	D		
EP1212	10.2	10.2	14	14	\$10.84
EP1612	14.2	10.2	14	14	13.98
EP1616	14.2	14.2	12	12	36.15
EP1620	14.2	18.2	12	12	41.62
EP2016	18.2	14.2	12	12	41.62
EP2020	18.2	18.2	12	12	49.96
EP2024	18.2	22.2	12	12	63.80
EP2416	22.2	14.2	12	12	49.51
EP2420	22.2	18.2	12	12	63.80
EP2424	22.2	22.2	12	12	74.09
EP2430	22.2	28.2	12	12	89.42
EP2442	22.2	40.2	12	12	122.04
EP3020	28.2	18.2	12	12	78.73
EP3024	28.2	22.2	12	12	89.42

STEEL PANEL

Cat. No.	Dimensions		Gauge	Net Price
	H	W		
EP3030	28.2	28.2	12	\$118.33
EP3048	28.2	46.2	12	179.67
EP3060	28.2	58.2	12	219.19
EP3624	34.2	22.2	12	104.80
EP3630	34.2	28.2	12	137.82
EP3636	34.2	34.2	12	161.27
EP3648	34.2	46.2	12	212.07
EP3660	34.2	58.2	12	259.96
EP4236	40.2	34.2	12	190.18
EP4824	46.2	22.2	12	139.09
EP4836	46.2	34.2	12	213.65
EP6036	58.2	34.2	12	255.25

GALVANIZED PANELS

Cat. No.	Note	Dimensions (Inches)		Gauge	Net Price
		H	W		
EPG1212	1	10.2	10.2	14	\$10.84
EPG1612	1	14.2	10.2	14	13.98
EPG1616	1	14.2	14.2	12	36.15
EPG1620	1	14.2	18.2	12	41.62
EPG2016	1	18.2	14.2	12	41.62
EPG2020	2	18.2	18.2	12	49.96
EPG2024	2	18.2	22.2	12	63.80
EPG2416	2	22.2	14.2	12	49.51
EPG2420	2	22.2	18.2	12	63.80
EPG2424	3	22.2	22.2	12	74.09
EPG2430	3	22.2	28.2	12	89.42
EPG2442	3	22.2	40.2	12	122.04
EPG3020	3	28.2	18.2	12	78.73
EPG3024	3	28.2	22.2	12	89.42
EPG3030	3	28.2	28.2	12	118.33
EPG3048	3	28.2	46.2	12	179.67
EPG3060	3	28.2	58.2	12	219.18
EPG3624	3	34.2	22.2	12	104.80
EPG3630	3	34.2	28.2	12	137.82
EPG3636	3	34.2	34.2	12	161.27
EPG3648	3	34.2	46.2	12	212.07
EPG3660	3	34.2	58.2	12	259.96
EPG4236	3	40.2	34.2	12	190.18
EPG4824	3	46.2	22.2	12	139.09
EPG4836	3	46.2	34.2	12	213.65
EPG6036	3	58.2	34.2	12	255.25

NOTE: 1-Flat Panel; 2-2 Formed Flanges; 3-4 Formed Flanges.

OIL TIGHT HOLE PLUGS

FEATURES:

- Designed to seal unused pushbutton holes, conduit openings, and knockout holes against dust, oil, and water.
- Standard pushbutton size is 30.5mm.
- Steel hole plugs are finished in grey, stainless steel and has a brushed natural stainless steel finish.
- Oil resistant gasket.
- Secured with an 8-32 x 3/4" threaded stud and plated wing nut.

STEEL HOLE PLUGS

Cat. No.	Description	Diameter (Inches)	Net Price
HP22	22mm pushbutton	1.22	\$6.11
HP50	.5" conduit	1.38	6.11
HP75	.75" conduit	1.63	7.73
HPB	Std. pushbutton	1.75	8.29
HP100	1" conduit	1.88	10.69
HP125	1.25" conduit	2.25	11.89
HP150	1.5" conduit	2.50	13.53
HP200	2" conduit	3.00	14.91
HP250	2.5" conduit	3.50	19.05
HP300	3" conduit	4.14	25.16
HP350	3.5" conduit	4.66	32.65
HP400	4" conduit	5.19	41.91

STAINLESS STEEL HOLE PLUGS

Cat. No.	Description	Diameter (Inches)	Net Price
HP22SS	22mm pushbutton	1.22	\$16.36
HP50SS	.5" conduit	1.38	16.36
HP75SS	.75" conduit	1.63	20.84
HPBSS	Std. pushbutton	1.75	23.00
HP100SS	1" conduit	1.88	28.02
HP125SS	1.25" conduit	2.25	32.24
HP150SS	1.5" conduit	2.50	36.25
HP200SS	2" conduit	3.00	40.20

Hammond Industrial Wallmount Enclosures

MANU
195
CODE

STANDARDS:

- NEMA Type 4, 12, 3R, and 13.
- UL 508 Type 4, 12, 3R, and 13.
- CSA Type 4, 3R, 12, and 13.
- JIC EGP-1-1967.
- IEC 529, IP66.

CONSTRUCTION:

- Formed from 16 gauge or 14 gauge steel.
- Smooth, continuously welded seams without knockouts, cutouts or holes.
- Welded brackets provide for enclosure mounting.
- Lift off cover is secured with stainless steel clamps and screws.
- Oil resistant gaskets are permanently secured.
- All models larger than 4" x 4" include a removable 14 gauge inner panel.
- Weldnuts are provided for mounting inner panels.
- A grounding stud is provided in the enclosure.

FINISH:

- Cover and enclosure are phosphatized primed and finished in ANSI/ASA 61 grey recoatable powder paint.
- Removable inner panel is finished in white powder paint.

ACCESSORIES:

- Breather kits.
- Door clamping hardware.
- Filter fans.
- Heaters.
- Spare inner panels.
- Terminal kit assemblies.
- Thermostats.
- Louvered ventilating plates.
- Window kits.

FINISH:

- Cover and enclosure are phosphatized primed and finished in ANSI/ASA 61 grey recoatable powder paint.
- Removable inner panel is finished in white powder paint.

ACCESSORIES:

- Breather kits.
- Door clamping hardware.
- Filter fans.
- Heaters.
- Spare inner panels.
- Terminal kit assemblies.
- Thermostats.
- Louvered ventilating plates.
- Window kits.

Cat. No.	Dimensions			Panel Size L x W	Centres		Ship Wt. (Lbs.)	Net Price
	L	W	D		L	W		
1414N4PHC ¹	6	4	3.0	4.88 x 2.88	6.75	2	2	\$81.62
1414N4PHG	8	6	3.5	6.75 x 4.88	8.75	4	3	101.51
1414N4PHE	6	6	4.0	4.88 x 4.88	6.75	4	6	92.76
1414N4PHI	10	8	4.0	8.75 x 6.88	10.75	6	10	123.42
1414N4PHI6	10	8	6.0	8.75 x 6.88	10.75	6	12	141.98
1414N4PHK	12	10	5.0	10.75 x 8.88	12.75	8	15	158.20
1414N4PHL6	12	12	6.0	10.75 x 10.88	12.75	10	25	167.96
1414N4PHM6	14	12	6.0	12.75 x 10.88	14.75	10	21	199.89
1414N4PHO6	16	14	6.0	14.75 x 12.88	16.75	12	26	237.53
1414N4PHM8	14	12	8.0	12.75 x 10.88	14.75	10	22	214.33
1414N4PHO10	16	14	10.0	14.75 x 12.88	16.75	12	28	275.58

WITHOUT INNER PANEL

1414N4PHA ¹	4	4	3.0	—	4.75	2	1	68.25
1414N4PHCLP ¹	6	4	3.0	—	6.75	2	2	77.27
1414N4PHGLP	8	6	3.5	—	8.75	4	5	95.47
1414N4PHEL	6	6	4.0	—	6.75	4	4	87.53
1414N4PHILP	10	8	4.0	—	10.75	6	9	115.18
1414N4PHI6LP	10	8	6.0	—	10.75	6	11	133.75
1414N4PHKLP	12	10	5.0	—	12.75	8	14	147.05
1414N4PHL6LP	12	12	6.0	—	12.75	10	24	154.84
1414N4PHM6LP	14	12	6.0	—	14.75	10	20	185.25
1414N4PHO6LP	16	14	6.0	—	16.75	12	24	218.15
1414N4PHM8LP	14	12	8.0	—	14.75	10	20	200.02
1414N4PHO10LP	16	14	10.0	—	16.75	12	26	255.93

¹Does not meet JIC requirements.

Cat. No.	Dimensions			Panel Size L x W	Centres		Ship Wt. (Lbs.)	Net Price
	L	W	D		L	W		
1414N4A	4	4	3.0	—	4.75	2	2	\$59.22
1414N4C	6	4	3.0	4.88 x 2.88	6.75	2	3	71.73
1414N4G	8	6	3.5	6.75 x 4.88	8.75	4	6	89.29
1414N4E	6	6	4.0	4.88 x 4.88	6.75	4	6	83.67
1414N4I	10	8	4.0	8.75 x 6.88	10.75	6	10	111.78
1414N4K	12	10	5.0	10.75 x 8.88	12.75	8	15	143.22
1414N4M6	14	12	6.0	12.75 x 10.88	14.75	10	20	181.69
1414N4O6	16	14	6.0	14.75 x 12.88	16.75	12	26	215.69
1414N4M8	14	12	8.0	12.75 x 10.88	14.75	10	22	188.71
1414N4O10	16	14	10.0	14.75 x 12.88	16.75	12	30	265.60



**NEMA TYPE 4 JIC ENCLOSURES
1414 N4 PH SERIES
CONTINUOUS HINGE, CLAMPED COVER
INNER PANEL INCLUDED**

APPLICATION:


- Designed for use as instrument enclosures, electric, hydraulic or pneumatic control housings, electrical junction boxes or terminal wiring enclosures.
- Provides protection where equipment may be hosed down or otherwise be very wet, or in outdoor applications for full weather protection.

STANDARDS:

- NEMA Type 4, 3R, 12, and 13.
- UL 508 Type 4, 12, 3R, and 13.
- CSA Type 4, 12, 3R, and 13.
- JIC EGP-1-1967 except those marked¹.
- IEC 529, IP66.

CONSTRUCTION:

- Formed from 16 gauge or 14 gauge steel.
- Smooth, continuously welded seams without knockouts, cutouts or holes.
- Welded brackets provide for enclosure mounting.
- Continuous hinged cover is secured with stainless steel clamps and screws.
- Stainless steel continuous hinge on door may be removed by pulling the stainless steel hinge pin.
- Oil resistant gaskets are permanently secured.
- All models larger than 4" x 4" include a removable 14 gauge inner panel.
- Weldnuts are provided for mounting inner panels.
- A bonding stud is provided on the door and a grounding stud is provided in the enclosure.

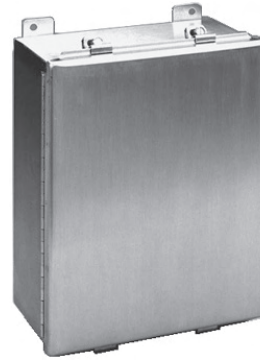

**NEMA STAINLESS STEEL JIC ENCLOSURES
1414 N4 PHSS SERIES
CONTINUOUS HINGE, CLAMPED COVER
PANEL INCLUDED**

APPLICATION:

- Designed for use as instrument enclosures, electric, hydraulic or pneumatic control housings, electrical junction boxes or terminal wiring enclosures. Provides protection where equipment may be hosed down or be very wet, or in applications where serious corrosion may be a problem.

STANDARDS:

- NEMA Type 12, Type 13, Type 4, Type 4X, and 3R.
- UL 508 Type 12, Type 4, Type 4X, and 3R.
- CSA Type 4, Type 4X, Type 12, and 3R.
- JIC EGP-1-1967.
- IEC 529, IP66.

CONSTRUCTION:

- Formed from 14 gauge Type 304 stainless steel without knockouts, cutouts or holes.
- Smooth, continuously welded seams.
- Welded brackets provide for enclosure mounting.
- Continuous stainless steel hinged cover is secured with stainless steel clamps and screws.
- Oil resistant gaskets are permanently secured.
- All models larger than 4" x 4" include a removable 14 gauge inner panel.
- Weldnuts are provided for mounting inner panels.
- A bonding stud is provided on the door and a grounding stud is provided in the enclosure.



Continued on next page....

Hammond Industrial Wallmount Enclosures

MANU
195
CODE

Cat. No.	Dimensions			Panel	Panel Dim.		Ship Wt. (Lbs.)	Net Price
	H	W	D		H	W		
2P12126 ¹	12	12	6	18P0909	9	9	14	\$287.27
2P16126 ¹	16	12	6	18P1309	13	9	17	306.58
2P16166	16	16	6	18P1313	13	13	21	330.35
2P20166	20	16	6	18P1713	17	13	25	354.00
2P20206	20	20	6	18P1717	17	17	28	381.96
2P20168	20	16	8	18P1713	17	13	27	373.38
2P24168	24	16	8	18P2113	21	13	30	399.18
2P16208	16	20	8	18P1713	13	17	26	373.35
2P20208	20	20	8	18P1717	17	17	32	403.44
2P24208	24	20	8	18P2117	21	17	35	433.64
2P30208	30	20	8	18P2717	27	17	44	478.80
2P20248	20	24	8	18P2117	17	21	36	433.60
2P24248	24	24	8	18P2121	21	21	46	468.07
2P30248	30	24	8	18P2721	27	21	56	519.82
2P36248	36	24	8	18P3321	33	21	64	571.38
2P30308	30	30	8	18P2727	27	27	74	581.04
2P36308	36	30	8	18P3327	33	27	91	642.40
2P242412	24	30	12	18P2121	21	21	53	519.82
2P302412	30	24	12	18P2721	27	21	69	577.85
2P482412	48	24	12	18P4521	45	21	130	752.16
2P363012	36	30	12	18P3327	33	27	98	713.49
2P423612	42	36	12	18P3933	39	33	135	868.49
2P483612	48	36	12	18P4533	45	33	147	945.95
2P242416	24	24	16	18P2121	21	21	75	571.36
2P363016	36	30	16	18P3327	33	27	117	784.47
2P483616	48	36	16	18P4533	45	33	158	1037.07

¹Less literature pocket.

NOTE: Inner panel ordered separate. Steel finished in white powder paint.



SINGLE DOOR STAINLESS STEEL ENCLOSURES SERIES 2000 WALLMOUNTS

APPLICATION:

- Designed to enclose electrical or electronic components, controls and instruments.
- Provides protection where equipment may be exposed to large amounts of water, or where highly corrosive conditions exist.
- Attractive design provides high tech styling and convenient user features.

STANDARDS:

- NEMA Type 4, 4X, 12, 13, and 3R.
- UL 508 Type 3R, 4, 4X, and 12.
- CSA Type 3R, 4, 4X, and 12.
- IEC 529, IP66.
- EIA RS-310-D.

CONSTRUCTION:

- Formed 14 gauge type 304 stainless steel bodies, with 14 gauge stainless steel doors.
- Smooth, continuously welded seams without knockouts, cutouts or holes.
- Body stiffeners are provided where required for increased strength and rigidity.
- Door profiles provide increased strength and are pre-punched to provide mounting options.
- Formed lip on door and enclosure exclude flowing liquids and contaminants.
- Doors may be easily removed, reversed or interchanged.
- Stainless steel slotted quarter turn oil-tight latches secure the door, with optional tamper resistant and locking latches available.
- Oil resistant gaskets are permanently secured.
- Compression stops ensure optimum gasket performance.
- Collar studs are provided for mounting inner panels and accessories.
- Standard hinge pins are easily removed to allow doors to be removed or reversed.
- A bonding screw is provided on the door and a grounding stud is provided in the enclosure.
- Comes with type 304 stainless steel hinges.
- A literature pocket is supplied for the inside of the door except as noted.

FINISH:

- Natural stainless steel with a smooth brushed finish.
- Optional inner panel is finished in white powder paint.

ACCESSORIES:

- Series 2000 accessories.
- Breather kits.
- Enclosure stabilizers.
- Filter fans.
- Floor stand kits.
- Heaters.
- Locking handles.
- Louvered ventilating plates.
- Mounting foot kits.
- S2000 replacement hinges.
- S2000 replacement quarter turns.
- Inner panels.
- Terminal kit assemblies.
- Thermostats.
- Window kits.


Cat. No.	Dimensions			Panel	Panel Dim.		Ship Wt. (Lbs.)	Net Price
	H	W	D		H	W		
2S12126 ¹	12	12	6	18P0909	9	9	14	\$821.04
2S16126 ¹	16	12	6	18P1309	13	9	17	900.51
2S16166	16	16	6	18P1313	13	13	21	997.96
2S20168	20	16	8	18P1713	17	13	27	1174.45
2S24168	24	16	8	18P2113	21	13	30	1280.87
2S20208	20	20	8	18P1717	17	17	32	1298.67
2S24208	24	20	8	18P2117	21	17	35	1421.95
2S20248	20	24	8	18P2117	17	21	36	1421.47
2S24248	24	24	8	18P2121	21	21	46	1562.95
2S30248	30	24	8	18P2721	27	21	56	1775.04
2S36248	36	24	8	18P3321	33	21	64	1987.07
2S30308	30	30	8	18P2727	27	27	74	2026.73
2S36308	36	30	8	18P3327	33	27	91	2278.95
2S423612	42	36	12	18P3933	39	33	135	3205.91
2S483612	48	36	12	18P4533	45	33	147	3524.35

¹Less literature pocket.

NOTE: Inner panel ordered separate. Steel finished in white powder paint.

SALES COUNTER LOCATION

TORONTO, ONTARIO

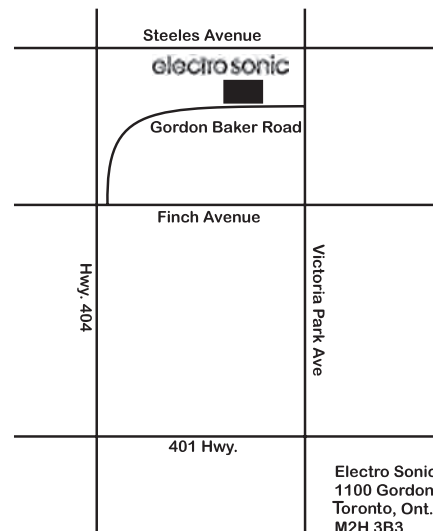

Electro Sonic Inc.
1100 Gordon Baker Road
Toronto, Ont.
M2H 3B3

HOURS: MON-FRI 8:00 am to 5:00 pm
SAT (Sept. to May) 9:00 am to 2:00 pm

934

PARTS INDICATED WITH A LEAF ARE CONSIDERED RoHS JULY 2006 COMPLIANT
BASED ON THE MANUFACTURER'S CONFIRMATION AT THE TIME OF PUBLISHING.
PRICES SUBJECT TO CHANGE WITHOUT NOTICE, APPLICABLE TAXES NOT INCLUDED

electro sonic

PANELS FOR 1414 SERIES AND PJ SERIES ENCLOSURES

- 14 gauge steel panels are finished in white.
- Panels and mounting hardware are included with 1414 Series enclosures.
- Mounting hardware only is included with PJ Series enclosures.


Cat. No.	Panel		For Use with 1414		For Use with PJ Series		Net Price
	L	W	L	W	L	W	
STEEL							
14R0503	4.88	2.88	6	4	—	—	\$4.35
14R0505	4.88	4.88	6	6	7.04	7.04	5.24
14R0705	6.75	4.88	6	6	8.94	7.06	6.05
14R0707	6.75	6.88	8	8	—	—	7.05
14R0907	8.75	6.88	10	8	11.08	9.20	8.24
14R0909	8.75	8.88	10	10	—	—	9.76
14R1105	10.75	4.88	12	6	—	—	7.73
14R1109	10.75	8.88	12	10	13.08	11.20	11.15
14R1111	10.75	10.88	12	12	—	—	13.13
14R1307	12.75	6.88	14	8	—	—	10.69
14R1311	12.75	10.88	14	12	15.08	13.20	14.64
14R1509	14.75	8.88	16	10	—	—	14.33
14R1513	14.75	12.88	16	14	17.22	15.34	19.38
P1868	16.88	14.88	—	—	19.34	17.34	48.55
P2068	18.44	14.44	—	—	20.94	16.94	48.82

PANELS FOR 1418, 1447, AND SERIES 2000 WALLMOUNT ENCLOSURES


- 12 gauge steel finished in white baked enamel.
- Larger panels have two, or four formed flanges.
- Some larger panels are 10 gauge.
- Panels and mounting hardware are included with 1418 and 1447 Series enclosures.
- Panel mounting hardware only is included with Series 2000 enclosures.

Cat. No.	Panel		For Use with Enclosure		Net Price
	L	W	L	W	
18P0909*	9	9	12	12	\$21.27
18P0921†	9	21	12	24	40.98
18P1309*	13	9	16	12	29.05
18P1313*	13	13	16	16	35.73
18P1709*	17	9	20	12	33.67
18P1713*	17	13	20	16	42.49
18P1717*	17	17	20	20	51.35
18P2113†	21	13	24	16	49.40
18P2117†	21	17	24	20	66.47
18P2121‡	21	21	24	24	76.40
18P2709†	27	9	30	12	59.49
18P2713†	27	13	30	16	65.87
18P2717†	27	17	30	20	79.82
18P2721‡	27	21	30	24	92.76
18P2727‡	27	27	30	30	130.16
18P3321‡	33	21	36	24	111.11
18P3327‡	33	27	36	30	147.49
18P3333‡	33	33	36	36	172.96
18P3921‡	39	21	42	24	127.27
18P3927‡	39	27	42	30	168.87
18P3933‡	39	33	42	36	198.71
18P4521‡	45	21	48	24	143.78
18P4527‡	45	27	48	30	189.25
18P4533‡	45	33	48	36	224.47
18P5733‡	57	33	60	36	276.07
18P6927‡	69	27	72	30	264.51
18P6933‡	69	33	72	36	327.65


*Flat Panel.
†2 Formed Flanges.
‡4 Formed Flanges.




AHK1



PHK1



AHKL1




THK1

LATCH KITS FOR SINGLE DOOR TYPE 12 ENCLOSURES

- Designed for field installation on most 1418 Series single door enclosures (does not fit 1418 J Series).
- Available with key locking, padlocking, and non-locking handles.
- Single point kits include a handle and latch cam.
- Three point kits include a handle, latch cam, latch rods and adjustable rod guides.
- Latch rod ends have rollers for easier door closing.
- All parts are plated or painted for corrosion resistance.

Cat. No.	Description	Net Price
NON-LOCKING HANDLE CLOCKWISE ROTATION		
AHK1	1 Point Latch	\$42.45
AHK2	3 Point Latch 48" and under	114.16
AHK3	3 Point Latch 60" and over	117.40
LOCKING HANDLE COUNTER CLOCKWISE ROTATION		
AHKL1	1 Point Latch	48.13
AHKL2	3 Point Latch under 60"	119.82
AHKL3	3 Point Latch Over 60"	122.95
PADLOCKING HANDLE		
PHK1	1 Point Latch	97.78
PHK2	3 Point Latch 48" and under	167.55
PHK3	3 Point Latch 60" and over	170.78
"TEE" HANDLE		
THK1	1 Point Latch	89.63
THK2	3 Point Latch 48" and under	153.55
THK3	3 Point Latch 60" and over	156.50



STEEL AND STAINLESS STEEL WINDOW KITS

- Designed to maintain environmental protection levels of NEMA 12 recoatable steel and NEMA 4 stainless steel enclosures in indoor applications.
- Window is 0.25" thick, clear acrylic.
- Frame is heavy gauge steel, or 304 stainless steel with integral weld studs and compression clips.
- Oil resistant neoprene gasket ensures a watertight seal.
- Finished in grey powder paint or natural brushed stainless steel.

Cat. No.	Description	Window Dimensions		No. of Clips	Recommended Cut-Out Size		Net Price
		H	W		H	W	
1481W0503	Steel	5	3.0	6	6.69	4.69	\$124.35
1481W0905	Steel	9	5.5	10	10.69	7.69	00.00
1481W1303	Steel	13	3.0	10	14.69	4.69	136.51
1481W1308	Steel	13	8.0	14	14.69	9.69	189.69
1481W1705	Steel	17	5.5	16	18.69	7.69	170.18
1481W1711	Steel	17	11.0	20	18.69	12.69	261.22
1481W2315	Steel	23	15.0	24	24.69	16.69	322.93
1481W2919	Steel	29	19.0	30	30.69	20.69	479.65
1481W3523	Steel	35	23.0	36	36.69	24.69	633.04
1481WSS0503	Stainless Steel	5	3.0	6	6.69	4.69	200.45
1481WSS0905	Stainless Steel	9	5.5	10	10.69	7.69	241.58
1481WSS1308	Stainless Steel	13	8.0	14	14.69	9.69	305.82
1481WSS1711	Stainless Steel	17	11.0	20	18.69	12.69	403.62
1481WSS2315	Stainless Steel	23	15.0	24	24.69	16.69	520.47
1481WSS2919	Stainless Steel	29	19.0	30	30.69	20.69	773.47

Hoffman Corrosion-Resistant Enclosures

MANU
190
CODE

STANDARD SIZES (CONT'D.)

Cat. No.	Door Gauge	Body Gauge	Enclosure Size A x B x C	CONCEPT Panel Cat. No.	Net Price
CONCEPT SINGLE-DOOR WITH WINDOWS (CONT'D.)					
C-SD30248W	14	16	30.00 x 24.00 x 8.00 (762 x 610 x 203)	C-P3024	\$875.30
C-SD202012W	16	16	20.00 x 20.00 x 12.00 (508 x 508 x 305)	C-P2020	752.00
C-SD242012W	16	16	24.00 x 20.00 x 12.00 (610 x 508 x 305)	C-P2420	809.90
C-SD242412W	14	16	24.00 x 24.00 x 12.00 (610 x 610 x 305)	C-P2424	875.30
C-SD302412W	14	16	30.00 x 24.00 x 12.00 (762 x 610 x 305)	C-P3024	973.10
C-SD242416W	14	14	24.00 x 24.00 x 16.00 (610 x 610 x 406)	C-P2424	962.20
C-SD242420W	14	14	24.00 x 24.00 x 20.00 (610 x 610 x 508)	C-P2424	1050.00
C-SD302420W	14	14	30.00 x 24.00 x 20.00 (762 x 610 x 508)	C-P3024	1171.00

CONCEPT FLUSH-MOUNT ENCLOSURES

C-FM12126	16	16	12.00 x 12.00 x 6.00 (305 x 305 x 152)	C-P1212	514.40
C-FM16126	16	16	16.00 x 12.00 x 6.00 (406 x 305 x 152)	C-P1612	539.70
C-FM20166	16	16	20.00 x 16.00 x 6.00 (508 x 406 x 152)	C-P2016	622.90
C-FM20206	16	16	20.00 x 20.00 x 6.00 (508 x 508 x 152)	C-P2020	672.10
C-FM24208	16	16	24.00 x 24.00 x 8.00 (610 x 508 x 203)	C-P2420	763.20
C-FM24248	14	16	24.00 x 24.00 x 8.00 (610 x 610 x 203)	C-P2424	823.50
C-FM30248	14	16	30.00 x 24.00 x 8.00 (762 x 610 x 203)	C-P3024	914.50

CONCEPT TWO-DOOR ENCLOSURES

C-TD24428	14	14	24.00 x 42.00 x 8.00 (610 x 1067 x 203)	C-P2442	988.30
C-TD30488	14	14	30.00 x 48.00 x 8.00 (762 x 1219 x 203)	C-P3048	1217.00
C-TD306012	14	14	30.00 x 60.00 x 12.00 (762 x 1524 x 305)	C-P3060	1566.00
C-TD364812	14	14	36.00 x 48.00 x 12.00 (914 x 1219 x 305)	C-P4836	1505.00
C-TD366012	14	14	36.00 x 60.00 x 12.00 (914 x 1524 x 305)	C-P6036	1751.00

NOTE: Available in light grey. Add suffix: LG to part number.



STAINLESS STEEL CONTINUOUS HINGE TYPE 4X "CHNFSS" JUNCTION BOXES

CONSTRUCTION: 16 or 14 gauge Type 304 or Type 316L stainless steel. Seams continuously welded and ground smooth, no holes or knockouts. Seamless foam-in-place gasket assures watertight and dust-tight seal. Stainless steel screws and clamps assure watertight seal. **INDUSTRY STANDARDS:** UL 50 Type 4 and Type 4X, NEMA/EEMAC Type 4, Type 4X, Type 12, and Type 13, JIC standard EGP-I-1967, CSA Type 4 and Type 4X, IEC 529, IP66.

STANDARD SIZES

Cat. No.	Gauge	Box Size A x B x C	Stainless Steel Panel Cat. No.	Steel Panel Cat. No.	Net Price
TYPE 304					
A-6044CHNFSS	16	6.00 x 4.00 x 4.00 (152 x 102 x 102)	A-6P4SS	A-6P4	\$336.30
A-606CHNFSS	16	6.00 x 6.00 x 4.00 (152 x 152 x 102)	A-6P6SS	A-6P6	367.50
A-8064CHNFSS	14	8.00 x 6.00 x 4.00 (203 x 152 x 102)	A-8P6SS	A-8P6	419.90
A-1008CHNFSS	14	10.00 x 8.00 x 4.00 (254 x 203 x 102)	A-10P8SS	A-10P8	505.20
A-12106CHNFSS	14	12.00 x 10.00 x 6.00 (305 x 254 x 152)	A-12P10SS	A-12P10	707.90
A-1212CHNFSS	14	12.00 x 12.00 x 6.00 (305 x 305 x 152)	A-12P12SS	A-12P12	781.00
A-1412CHNFSS	14	14.00 x 12.00 x 6.00 (356 x 305 x 152)	A-14P12SS	A-14P12	878.90
A-1614CHNFSS	14	16.00 x 14.00 x 6.00 (406 x 356 x 152)	A-16P14SS	A-16P14	1018.00

STANDARD SIZES

Cat. No.	Gauge	Box Size A x B x C	Stainless Steel Panel Cat. No.	Steel Panel Cat. No.	Net Price
TYPE 316L					
A-6044CHNFSS6	16	6.00 x 4.00 x 4.00 (152 x 102 x 102)	A-6P4SS	A-6P4	\$416.40
A-606CHNFSS6	16	6.00 x 6.00 x 4.00 (152 x 152 x 102)	A-6P6SS	A-6P6	468.30
A-8064CHNFSS6	14	8.00 x 6.00 x 4.00 (203 x 152 x 102)	A-8P6SS	A-8P6	519.80
A-1008CHNFSS6	14	10.00 x 8.00 x 4.00 (254 x 203 x 102)	A-10P8SS	A-10P8	643.90
A-12106CHNFSS6	14	12.00 x 10.00 x 6.00 (305 x 254 x 152)	A-12P10SS	A-12P10	902.00
A-1212CHNFSS6	14	12.00 x 12.00 x 6.00 (305 x 305 x 152)	A-12P12SS	A-12P12	995.20
A-1412CHNFSS6	14	14.00 x 12.00 x 6.00 (356 x 305 x 152)	A-14P12SS	A-14P12	1090.00
A-1614CHNFSS6	14	16.00 x 14.00 x 6.00 (406 x 356 x 152)	A-16P14SS	A-16P14	1300.00



CONCEPT™ STAINLESS STEEL WALL-MOUNT ENCLOSURES

CONSTRUCTION: Manufactured from 16 or 14 gauge Type 304 stainless steel. Seams continuously welded and ground smooth. Minimum width body flange provides maximum door opening. Body flange trough excludes liquids and contaminants. Panel mounting studs fit optional CONCEPT panels and other accessories. Mounting holes in back of body for direct mounting or for optional external mounting feet. Type 304 stainless steel hidden hinges promote clean aesthetic appearance. Standard 120 degree door opening or optional hinge kit for 230 degree maximum door opening. Doors are interchangeable and easily removable by pulling captive hinge pins. Door bars and centre stiffener on larger doors for extra rigidity. Quarter-turn latches (or a 3-point latch system on larger enclosures) furnished with flush slotted insert. Optional handles or inserts are available. Window door enclosures have a clear polycarbonate window mounted flush with door surface. Hinge mounting brackets for wire management or optional accessories. Seamless foam-in-place one piece gasket provides oil-tight and dust-tight seal against contaminants. Self-grounding latch system with double seal provides maximum protection against leakage. **INDUSTRY STANDARDS:** UL508 Type 4, Type 4X and Type 12, NEMA/EEMAC Type 4, Type 4X, Type 12, and Type 13, CSA Type 4, Type 4X and Type 12, VDE IP66, IEC 529, IP66.

STANDARD SIZES

Cat. No.	Door Gauge	Body Gauge	Enclosure Size A x B x C	CONCEPT Panel Cat. No.	Net Price
C-SD12126SS	16	16	12.00 x 12.00 x 6.00 (305 x 305 x 152)	C-P1212	\$963.20
C-SD16126SS	16	16	16.00 x 12.00 x 6.00 (406 x 305 x 152)	C-P1612	1057.00
C-SD16166SS	16	16	16.00 x 16.00 x 6.00 (406 x 406 x 152)	C-P1616	1173.00
C-SD20166SS	16	16	20.00 x 16.00 x 6.00 (508 x 406 x 152)	C-P2016	1325.00
C-SD20206SS	16	16	20.00 x 20.00 x 6.00 (508 x 508 x 152)	C-P2020	1463.00
C-SD16208SS	16	16	16.00 x 20.00 x 8.00 (406 x 508 x 203)	C-P2016	1421.00
C-SD20168SS	16	16	20.00 x 16.00 x 8.00 (508 x 406 x 203)	C-P2016	1382.00
C-SD20208SS	16	16	20.00 x 20.00 x 8.00 (508 x 508 x 203)	C-P2020	1526.00
C-SD24168SS	16	16	24.00 x 16.00 x 8.00 (610 x 406 x 203)	C-P2416	1507.00
C-SD24208SS	16	16	24.00 x 20.00 x 8.00 (610 x 508 x 203)	C-P2420	1671.00
C-SD24248SS	14	16	24.00 x 24.00 x 8.00 (610 x 610 x 203)	C-P2424	1838.00
C-SD30248SS	14	16	30.00 x 24.00 x 8.00 (762 x 610 x 203)	C-P3024	2085.00
C-SD30308SS	14	14	30.00 x 30.00 x 8.00 (762 x 762 x 203)	C-P3030	2449.00
C-SD36248SS	14	14	36.00 x 24.00 x 8.00 (914 x 610 x 203)	C-P3624	2401.00
C-SD36308SS	14	14	36.00 x 30.00 x 8.00 (914 x 762 x 203)	C-P3630	2753.00

Continued on next page...


Hoffman Corrosion-Resistant Enclosures

STANDARD SIZES (CONT'D.)

Cat. No.	Door Gauge	Body Gauge	Enclosure Size A x B x C	CONCEPT Panel Cat. No.	Net Price
C-SD363612SS	14	14	36.00 x 36.00 x 12.00 (914 x 914 x 305)	C-P3636	\$3390.00
C-SD423612SS	14	14	42.00 x 36.00 x 12.00 (1067 x 914 x 305)	C-P4236	3763.00
C-SD483612SS	14	14	48.00 x 36.00 x 12.00 (1219 x 914 x 305)	C-P4836	4137.00

WALL-MOUNT ENCLOSURES WITH WINDOWS

Cat. No.	Door Gauge	Body Gauge	Enclosure Size A x B x C	CONCEPT Panel Cat. No.	Net Price
C-SD12126WSS	16	16	12.00 x 12.00 x 6.00 (305 x 305 x 152)	C-P1212	1369.00
C-SD16126WSS	16	16	16.00 x 12.00 x 16.00 (406 x 305 x 152)	C-P1612	1517.00
C-SD20166WSS	16	16	20.00 x 16.00 x 6.00 (508 x 406 x 152)	C-P2016	1839.00
C-SD20206WSS	16	16	20.00 x 20.00 x 6.00 (508 x 508 x 152)	C-P2020	2012.00
C-SD20168WSS	16	16	20.00 x 16.00 x 8.00 (508 x 406 x 203)	C-P2016	1966.00
C-SD20208WSS	16	16	20.00 x 20.00 x 8.00 (508 x 508 x 203)	C-P2020	2162.00
C-SD24208WSS	16	16	24.00 x 20.00 x 8.00 (610 x 508 x 203)	C-P2420	2384.00
C-SD24248WSS	14	16	24.00 x 24.00 x 8.00 (610 x 610 x 203)	C-P2424	2606.00
C-SD30248WSS	14	16	30.00 x 24.00 x 8.00 (762 x 610 x 8.00)	C-P3024	2980.00



STAINLESS STEEL TYPE 4X ENCLOSURES

CONSTRUCTION: Type 304 or Type 316L stainless steel. Type 316L stainless steel has the best corrosion-resistance of the standard stainless steels. 14 gauge bodies and 14 gauge doors on all sizes. Seams continuously welded and ground smooth, no holes or knockouts. Seamless foam-in-place gasket assures watertight and dust-tight seal. Body stiffener in larger enclosures for extra rigidity. Rolled lip around three sides of door and all sides of enclosure opening excludes liquids and contaminants. Stainless steel door clamp assembly assures watertight seal. Hasp and staple for padlocking. Door removed by pulling stainless steel continuous hinge pin. Data pocket is high impact thermoplastic. Collar studs provided for mounting optional panels. All exterior hardware on Type 316L stainless steel enclosures is Type 316L stainless steel. **FINISH:** Enclosures are unpainted. Cover, sides, top, bottom, and back have smooth brushed finish. **INDUSTRY STANDARDS:** UL 508 Type 4 and 4X, NEMA/EEMAC Type 3, Type 4, Type 4X, Type 12, and Type 13, JIC standard EGP-I-1967, CSA Type 4 and Type 4X, IEC 529, IP66.

STANDARD SIZES

Cat. No.	Enclosure Size A x B x C		Steel Panel Cat. No.	Net Price
	inch	millimeter		

TYPE 304

A-16H1206SSLP	16.00 x 12.00 x 6.00	406 x 305 x 152	A-16P12	\$1200.00
A-16H1606SSLP	16.00 x 16.00 x 6.00	406 x 406 x 152	A-16P16	1331.00
A-16H2006SSLP	16.00 x 20.00 x 6.00	406 x 508 x 152	A-20P16	1460.00
A-20H1606SSLP	20.00 x 16.00 x 6.00	508 x 406 x 152	A-20P16	1460.00
A-20H2006SSLP	20.00 x 20.00 x 6.00	508 x 508 x 152	A-20P20	1614.00
A-24H2006SSLP	24.00 x 20.00 x 6.00	610 x 508 x 152	A-24P20	1765.00
A-16H1208SSLP	16.00 x 12.00 x 8.00	406 x 305 x 203	A-16P12	1284.00
A-20H1608SSLP	20.00 x 16.00 x 8.00	508 x 406 x 203	A-20P16	1567.00
A-20H2408SSLP	20.00 x 24.00 x 8.00	508 x 610 x 203	A-24P20	1896.00
A-24H1608SSLP	24.00 x 16.00 x 8.00	610 x 406 x 203	A-24P16	1707.00
A-24H2008SSLP	24.00 x 20.00 x 8.00	610 x 508 x 203	A-24P20	1896.00
A-24H2408SSLP	24.00 x 24.00 x 8.00	610 x 610 x 203	A-24P24	2082.00
A-24H3008SSLP	24.00 x 30.00 x 8.00	610 x 762 x 203	A-30P24	2367.00
A-30H2008SSLP	30.00 x 20.00 x 8.00	762 x 508 x 203	A-30P20	2143.00
A-30H2408SSLP	30.00 x 24.00 x 8.00	762 x 610 x 203	A-30P24	2367.00
A-30H3008SSLP	30.00 x 30.00 x 8.00	762 x 762 x 203	A-30P30	2701.00
A-36H2408SSLP	36.00 x 24.00 x 8.00	914 x 610 x 203	A-36P24	2647.00
A-36H3008SSLP	36.00 x 30.00 x 8.00	914 x 762 x 203	A-36P30	3035.00
A-42H3608SSLP	42.00 x 36.00 x 8.00	1067 x 914 x 203	A-42P36	3813.00
A-48H3608SSLP	48.00 x 36.00 x 8.00	1219 x 914 x 203	A-48P46	4198.00

STANDARD SIZES

Cat. No.	Enclosure Size A x B x C		Steel Panel Cat. No.	Net Price
	inch	millimeter		
A-20H1610SSLP	20.00 x 16.00 x 10.00	508 x 406 x 254	A-20P16	\$1674.00
A-24H2010SSLP	24.00 x 20.00 x 10.00	610 x 508 x 254	A-24P20	2023.00
A-36H2410SSLP	36.00 x 24.00 x 10.00	914 x 610 x 254	A-36P24	2825.00
A-36H3010SSLP	36.00 x 30.00 x 10.00	914 x 762 x 254	A-36P30	3229.00
A-42H3010SSLP	42.00 x 30.00 x 10.00	1067 x 762 x 254	A-42P30	3583.00
A-24H2412SSLP	24.00 x 24.00 x 12.00	610 x 610 x 305	A-24P24	2367.00
A-30H2412SSLP	30.00 x 24.00 x 12.00	762 x 610 x 305	A-30P24	2683.00
A-36H3012SSLP	36.00 x 30.00 x 12.00	914 x 762 x 305	A-36P30	3424.00
A-36H3612SSLP	36.00 x 36.00 x 12.00	914 x 914 x 305	A-36P36	3847.00
A-48H3612SSLP	48.00 x 36.00 x 12.00	1219 x 914 x 305	A-48P36	4694.00
A-60H3612SSLP	60.00 x 36.00 x 12.00	152 x 914 x 305	A-60P36	5540.00
A-30H2416SSLP	30.00 x 24.00 x 16.00	762 x 610 x 406	A-30P24	3002.00
A-36H3016SSLP	36.00 x 30.00 x 16.00	914 x 762 x 406	A-36P30	3813.00
A-48H3616SSLP	48.00 x 36.00 x 16.00	1219 x 914 x 406	A-48P36	5186.00

TYPE 316L

A-16H1206SS6LP	16.00 x 12.00 x 6.00	406 x 305 x 152	A-16P12	1370.00
A-16H1606SS6LP	16.00 x 16.00 x 6.00	406 x 406 x 152	A-16P16	1616.00
A-16H2006SS6LP	16.00 x 20.00 x 6.00	406 x 508 x 152	A-20P16	1773.00
A-20H1606SS6LP	20.00 x 16.00 x 6.00	508 x 406 x 152	A-20P16	1667.00
A-20H2006SS6LP	20.00 x 20.00 x 6.00	508 x 508 x 152	A-20P20	1959.00
A-24H2006SS6LP	24.00 x 20.00 x 6.00	610 x 508 x 152	A-24P20	2145.00
A-24H2406SS6LP	24.00 x 24.00 x 6.00	610 x 610 x 152	A-24P24	2363.00
A-16H1208SS6LP	16.00 x 12.00 x 8.00	406 x 305 x 203	A-16P12	1558.00
A-20H1608SS6LP	20.00 x 16.00 x 8.00	508 x 406 x 203	A-20P16	1785.00
A-20H2008SS6LP	20.00 x 20.00 x 8.00	508 x 508 x 203	A-20P20	2083.00
A-20H2408SS6LP	20.00 x 24.00 x 8.00	508 x 610 x 203	A-24P20	2301.00
A-24H1608SS6LP	24.00 x 16.00 x 8.00	610 x 406 x 203	A-24P16	2071.00
A-24H2008SS6LP	24.00 x 20.00 x 8.00	610 x 508 x 203	A-24P20	2163.00
A-24H2408SS6LP	24.00 x 24.00 x 8.00	610 x 610 x 203	A-24P24	2377.00
A-24H3008SS6LP	24.00 x 30.00 x 8.00	610 x 762 x 203	A-30P24	2869.00
A-30H2008SS6LP	30.00 x 20.00 x 8.00	762 x 508 x 203	A-30P20	2599.00
A-30H2408SS6LP	30.00 x 24.00 x 8.00	762 x 610 x 203	A-30P24	2700.00
A-30H3008SS6LP	30.00 x 30.00 x 8.00	762 x 762 x 203	A-30P30	3278.00
A-36H2408SS6LP	36.00 x 24.00 x 8.00	914 x 610 x 203	A-36P24	3214.00
A-36H3008SS6LP	36.00 x 30.00 x 8.00	914 x 762 x 203	A-36P30	3463.00
A-42H3608SS6LP	42.00 x 36.00 x 8.00	1067 x 914 x 203	A-42P36	4627.00
A-48H3608SS6LP	48.00 x 36.00 x 8.00	1219 x 914 x 203	A-48P46	5095.00
A-20H1610SS6LP	20.00 x 16.00 x 10.00	508 x 406 x 254	A-20P16	2030.00
A-24H2010SS6LP	24.00 x 20.00 x 10.00	610 x 508 x 254	A-24P20	2456.00
A-30H2410SS6LP	30.00 x 24.00 x 10.00	762 x 610 x 254	A-30P24	3047.00
A-36H2410SS6LP	36.00 x 24.00 x 10.00	914 x 610 x 254	A-36P24	3426.00
A-36H3010SS6LP	36.00 x 30.00 x 10.00	914 x 762 x 254	A-36P30	3920.00
A-42H3010SS6LP	42.00 x 30.00 x 10.00	1067 x 762 x 254	A-42P30	4346.00
A-48H3610SS6LP	48.00 x 36.00 x 10.00	1219 x 914 x 254	A-48P36	5471.00
A-24H2412SS6LP	24.00 x 24.00 x 12.00	610 x 610 x 305	A-24P24	2869.00
A-30H2412SS6LP	30.00 x 24.00 x 12.00	762 x 610 x 305	A-30P24	3062.00
A-36H3012SS6LP	36.00 x 30.00 x 12.00	914 x 762 x 305	A-36P30	4033.00
A-36H3612SS6LP	36.00 x 36.00 x 12.00	914 x 914 x 305	A-36P36	4668.00
A-48H3612SS6LP	48.00 x 36.00 x 12.00	1219 x 914 x 305	A-48P36	5697.00
A-60H3612SS6LP	60.00 x 36.00 x 12.00	152 x 914 x 305	A-60P36	6722.00
A-30H2416SS6LP	30.00 x 24.00 x 16.00	762 x 610 x 406	A-30P24	3641.00
A-36H3016SS6LP	36.00 x 30.00 x 16.00	914 x 762 x 406	A-36P30	4627.00
A-48H3616SS6LP	48.00 x 36.00 x 16.00	1219 x 914 x 406	A-48P36	5917.00
A-60H3616SS6LP	60.00 x 36.00 x 16.00	1524 x 914 x 406	A-60P36	7472.00



COMPACT™ ALUMINUM TYPE 4X

CONSTRUCTION: Cast aluminum; no welded seams or sharp corners. Captivated cover screws are stainless steel. Cover screws placed outside sealed area. Two to four grounding screws located on enclosure backwall. Oil-resistant o-ring gasket with tongue and groove construction. Threaded internal bosses provided for mounting optional panels, rails and other components. **INDUSTRY STANDARDS:** UL 508 Type 4, Type 4X, Type 12, and Type 13, NEMA/EEMAC Type 4, Type 4X, Type 12, and Type 13, CSA Type 4, Type 4X, Type 12, and Type 13, IEC 529, IP65.

Continued on next page....