

Type 0AKL

Electric Vehicle Auxiliary Fuses

OAKL Series

RoHS Compliant

Description

General purpose fuse for EV/HEV

Features

- Excellent DC performance
- Design refer to JASO D622:2006
- Full compliance with EU Directive 2011/65/EU and amending directive 2015/863

Applications

EV or HEV application



Electrical Characteristics

% of Ampere Rating (A)	Operating Time (Unit: s)	
	Min	Max
200%	1	300
300%	0.2	30
500%	0.1	10

Physical Specifications

Materials	Body : Ceramic
	Terminals : Stud Mount, Center Terminal (Tin Plated Brass); Stud Mount, Bottom Terminal (Tin Plated Copper); Wave solder, 1-pin PCB mount (Silver Plated Brass); Wave solder, 2-pin PCB mount (Tin Plated Copper).
Marking	On Fuse :
	"bel", "0AKL",
	"Current Rating", "Voltage Rating"
	On Label :
	"bel", "0AKLX", "Current Rating", "Voltage Rating", "Interrupting Rating", "Appropriate Safety Logos" and "RoHS", "e" (China RoHS compliant).

Ratings


Ampere Rating / Voltage Rating	Ampere Range / Volt @ I.R. ability*
10A-30A / 1000V DC	10A-30A / 1000V @ 50kA DC
*I.R.= Interrupting Rating = Short Circuit Rating(Amps)	

Type 0AKL


2 / 3

Temperature Re-Rating Curve

Operating Temperature: -40°C to +125°C,
with proper rerating factor applied

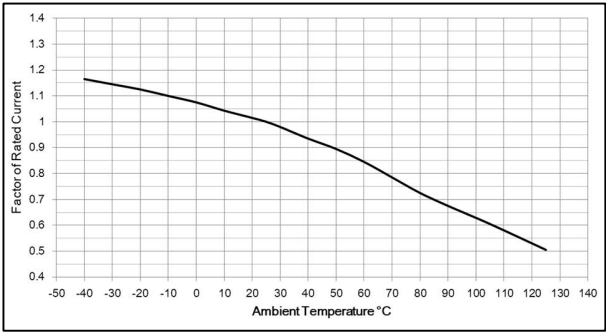

Average Time Current Curve

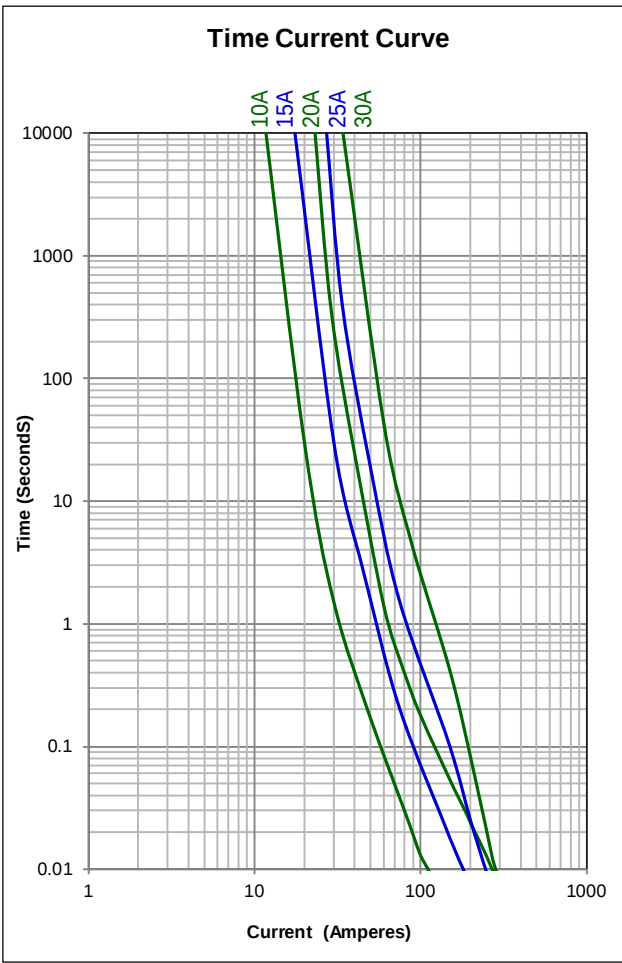

Electrical Specifications

Part Number	Ampere Rating	Voltage and Interrupting Ratings	Typical cold resistance (mOhms)	Typical voltage drop (mV)		Typical pre-arcing I ² t (A ² sec)
				At 0.5I _n	At 1.0I _n	
0AKLx9100-xx	10A	See Table of Ratings on Page 1 for Voltage and associated Interrupting Ratings	12.5	60	130	120
0AKLx9150-xx	15A		7.2	60	140	405
0AKLx9200-xx	20A		5.2	80	154	1450
0AKLx9250-xx	25A		4.0	63	145	560
0AKLx9300-xx	30A		3.1	56	150	650

Consult manufacturer for other ratings

*Temperature Rise: ≤50K with 70% of rated current

** Typical pre-arcing I²t measured at 10I_n



Specifications subject to change without notice

Bel Fuse Inc.
206 Van Vorst Street
Jersey City, NJ 07302 USA

+1 201.432.0463
Bel.US.CS@belf.com
belfuse.com/circuit-protection

© 2022 Bel Fuse, Inc.

Rev. 0AKL Aug2022

Type 0AKL

3 / 3


Fuse FGNO Explanation

0AKL X [XXXX] -XX

0AKLA/B/E/W/=0AKLA/B/E/W; [XXXX]=Ampere Rating; XX=See Ordering Information as below

Amps	Bel FGNO[XXXX]
10	9100
15	9150
20	9200
25	9250
30	9300

Mechanical Dimensions

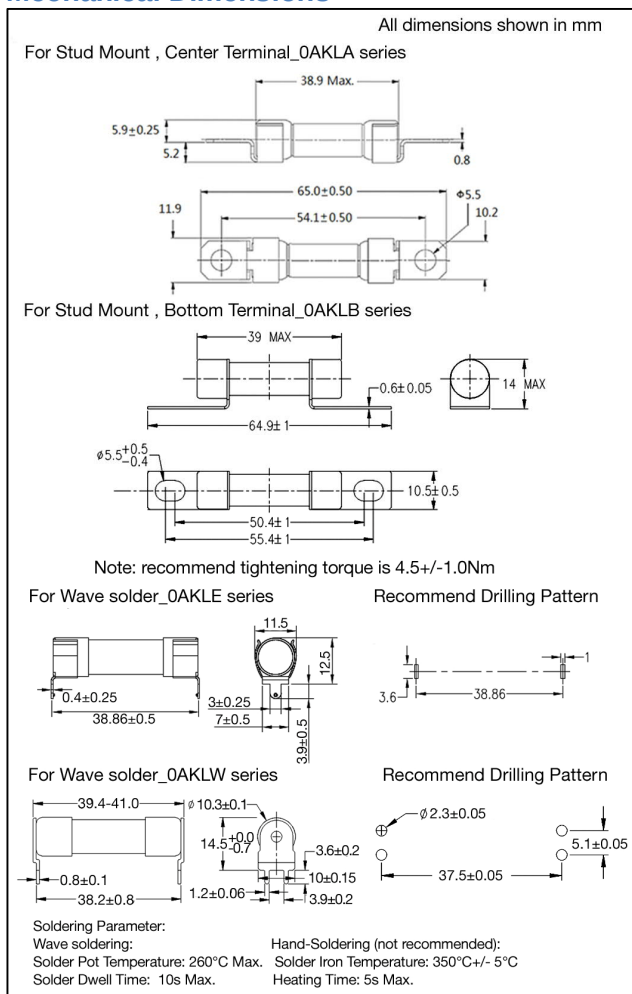

Ordering Information

0AKL X XXXX - X X

FUSE TYPE _____

0AKL

MOUNTING TAB STYLE _____

A = For Stud Mount, Center Terminal
B = For Stud Mount, Bottom Terminal
E = For Wave solder(1-pin PCB mount)
W = For Wave solder(2-pin PCB mount)

AMPERE RATING _____

Refer to fuse FGNO explanation table

MOUNTING TAB CODE _____

P = Plastic tray
TBD for Stud Mount, Center Terminal and Wave solder

QUANTITY CODE _____

D = 40pcs/plastic tray, 400pcs/carton box
(for Stud Mount, Bottom Terminal)
TBD for Stud Mount, Center Terminal and Wave solder

Packaging

Packaging Option	Quantity	Packaging Code
Plastic tray (Stud Mount, Bottom Terminal)	40 pcs/plastic tray, 400pcs/ carton box	PD
TBD for Stud Mount, Center Terminal	TBD	TBD
TBD for Wave solder	TBD	TBD



Specifications subject to change without notice

Bel Fuse Inc.
206 Van Vorst Street
Jersey City, NJ 07302 USA

+1 201.432.0463
Bel.US.CS@belf.com
belfuse.com/circuit-protection

© 2022 Bel Fuse, Inc.

Rev. 0AKL Aug2022