



TO51-10

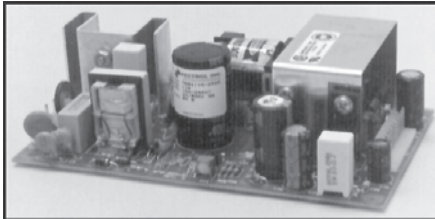

TO81-10

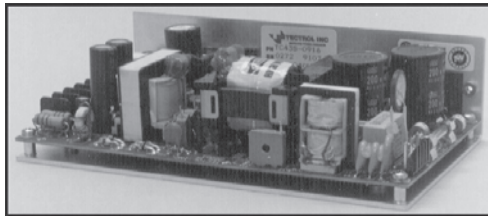

TO151-10

## SWITCH MODE POWER SUPPLIES UNIVERSAL INPUT SERIES (90-264 VAC)

### STANDARD FEATURES:


- Efficiency Above 70%
- Short Circuit Protection
- Meets FCC, VDE EMI Standards
- UL, CSA (TUV) VDE Approved (or in Process of Approval)
- Over Voltage Protection
- Inrush Current Limited & Soft Start
- Current & Power Limited
- Low Ripple & Noise

### UNIVERSAL INPUT SERIES DIMENSIONS


Cat. No.	Dimensions Inches (mm)		
	Width	Length	Depth
TO31-10/11/12	3.0 (76)	5.0 (127)	1.45 (37)
TO39-10B	3.0 (76)	5.0 (127)	1.45 (37)
TO51-10/11/12	3.75 (95)	5.7 (145)	1.7 (43)
TO81-10	4.0 (102)	6.5 (165)	1.6 (41)
TO101-10/11/12	4.25 (108)	7.75 (197)	1.9 (48)
TO131-10/11/12	4.5 (114)	7.75 (197)	2.3 (58)
TO151-10/12	4.45 (113)	7.5 (191)	2.0 (51)
TO221-10/11/12	5.0 (127)	9.0 (229)	2.5 (63.5)

### UNIVERSAL INPUT SERIES (90-264VAC), VERY LOW CROSS-REGULATION BETWEEN MAIN AND AUXILIARY RAILS

Cat. No.	Watts	Output Voltage and Current				Net Price
		#1	#2	#3	#4	
<b>LOW POWER, UNIVERSAL INPUT, SINGLE/MULTI-OUTPUT</b>						
TO31-10	30	5V/3A	+12V/1.5A	-12V/35A	—	<b>\$73.80</b>
TO31-11	30	5V/3A	+24V/0.8A	-12V/35A	—	<b>59.04</b>
TO31-12	30	5V/3A	+15V/1.5A	-15V/35A	—	<b>64.94</b>
TO39-10B	40	5V/4.5A	+12V/2A	-12V/35A	—	<b>76.80</b>
TO51-10	50	5V/6A	+12V/2A	-12V/0.5A	-5V/0.1A	<b>77.38</b>
TO51-12	50	5V/6A	+15V/1.5A	-15V/0.5A	-5V/0.1A	<b>77.38</b>
<b>MEDIUM POWER, UNIVERSAL INPUT, MULTI-OUTPUT</b>						
TO81-10	80	5V/10A	+12V/3A	-12V/1.25A	+12V/1A	<b>116.67</b>
TO101-10	100	5V/12A	+12V/3.5A	-12V/1.5A	-5V/0.3A	<b>160.19</b>
TO101-11	100	5V/12A	+12V/3.5A	-12V/1.5A	+24V/1.5A	<b>160.19</b>
TO101-12	100	5V/12A	+15V/3.5A	-15V/1.5A	-5V/0.3A	<b>160.19</b>
TO131-10	130	5V/15A	+12V/4A	-12V/1.5A	-5V/0.3A	<b>202.38</b>
TO151-10	150	5V/25A	+12V/4A	-12V/3A	—	<b>223.81</b>
TO151-12	150	5V/25A	+15V/4A	-15V/3A	—	<b>223.81</b>
TO221-10	220	5V/30A	+12V/6A	-12V/1.5A	-5V/1A	<b>279.76</b>
TO221-12	220	5V/30A	+15V/6A	-15V/1.5A	-5V/1A	<b>279.76</b>

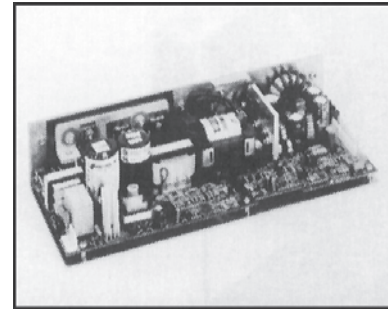

TO304-10

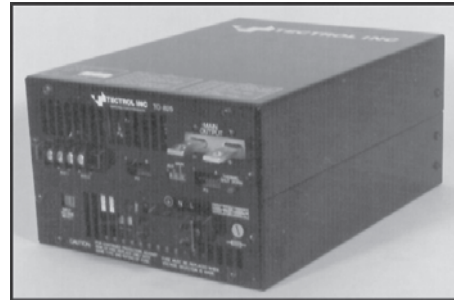

TO825-10B

## SWITCH MODE POWER SUPPLIES PROFESSIONAL POWER SUPPLIES

SEMI-MODULAR POWER SUPPLIES: Short circuit protected. Inrush current limited and soft start. No cross-regulation between main and auxiliary rails. High surge load capability. Remote sensing on main output. HIGH-POWER SINGLE/MULTIPLE OUTPUT: Up to 5 fully regulated outputs. Forced current sharing for parallel redundant operation. Power fail warning. Front panel AC select.

### STANDARD FEATURES:

- 77-86% Efficiency
- Inhibit—Active Low
- Over Voltage Protection
- Over Temperature Protection
- Power Trading Between Secondaries
- UL, CSA & (TUV) VDE Approved (or in Process of Approval)
- High surge capability for starting motor loads, disk-drives, etc.
- Current Limited Outputs
- Meets FCC & VDE EMI Standards


### PROFESSIONAL POWER SUPPLIES DIMENSIONS

Cat. No.	Dimensions Inches (mm)		
	Width	Length	Depth
TO204-10/11	5.0 (127)	10.5 (267)	2.6 (66)
TO304-10/12	5.0 (127)	12.0 (305)	2.6 (66)
TO404-10/17	5.0 (127)	14.0 (356)	2.6 (66)
TO825-10B	8.0 (203)	11.75 (298)	5.0 (127)

### PROFESSIONAL POWER SUPPLIES

Cat. No.	Watts	Output Voltage and Current				Net Price
		#1	#2	#3	#4	
<b>SEMI-MODULAR POWER SUPPLIES</b>						
TO204-10	250	5V/30A	12V/8A	12V/8A	—	<b>\$355.95</b>
TO404-10	450	5V/50A	12V/10A	12V/10A	+24V/12A	<b>594.05</b>
TO404-17	450	5V/50A	15V/10A	15V/10A	+24V/12A	<b>594.05</b>
<b>HIGH-POWER SINGLE/MULTIPLE OUTPUT</b>						
TO825-10B	825	5V/150A	12V/20A	12V/20A	12V/20A	<b>1375.00</b>

**NOTE:** Modular add-in regulators are available for TO204, TO304 and TO404 output #4.

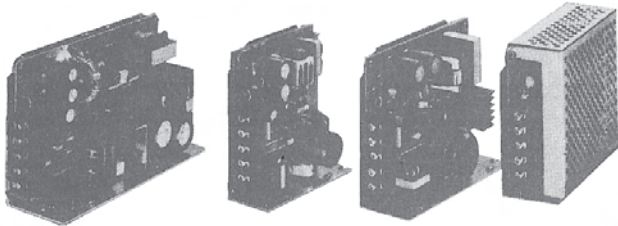


### S82J SWITCH-MODE POWER SUPPLY

- Power range from 10W to 600W
- Open-frame style (covers are available) with screw terminal connections

Power Ratings	10W	25W	50W	100W	150W	300W	600W
Efficiency	70% (5V) to 86% (24V)				85%	82%	
Input							
Voltage	100 to 240VAC						
Frequency	47 to 450 Hz						
Noise filter	Yes						
Output							
Voltage adjustment	±10%						
Ripple and Noise	2% (p-p) max.						
Line regulation	0.4% max (at 100% load)						
Load regulation	0.8% max (10 to 100% of load)						
Overload protection	105% min (automatic reset)						
Over-voltage protection	No	No	No	Yes (5V only)	No	Yes	Yes

Cat. No.	Din-mount	Power	Output		Dimensions	Net Price
			V	A		
S82J-01005A	No	10W	5V	2A	90×97×35	\$72.00
S82J-01005AD	Yes	10W	5V	2A	90×97×35	82.00
S82J-01012A	No	10W	12V	1A	90×97×35	72.00
S82J-01012AD	Yes	10W	12V	1A	90×97×35	82.00
S82J-01015A	No	10W	15V	0.7A	90×97×35	72.00
S82J-01015AD	Yes	10W	15V	0.7A	90×97×35	82.00
S82J-01024A	No	10W	24V	0.5A	90×97×35	72.00
S82J-01024AD	Yes	10W	24V	0.5A	90×97×35	82.00
S82J-02505A	No	25W	5V	5A	124×97×40	106.00
S82J-02505AD	Yes	25W	5V	5A	124×97×40	116.00
S82J-02512A	No	25W	12V	2.1A	124×97×40	106.00
S82J-02512AD	Yes	25W	12V	2.1A	124×97×40	116.00
S82J-02515A	No	25W	15V	1.7A	124×97×40	106.00
S82J-02515AD	Yes	25W	15V	1.7A	124×97×40	116.00
S82J-02524A	No	25W	24V	1.1A	124×97×40	106.00
S82J-02524AD	Yes	25W	24V	1.1A	124×97×40	116.00
S82J-05005A	No	50W	5V	10A	161×97×40	145.00
S82J-05005AD	Yes	50W	5V	10A	161×97×40	155.00
S82J-05012A	No	50W	12V	4.2A	161×97×40	145.00
S82J-05012AD	Yes	50W	12V	4.2A	161×97×40	155.00
S82J-05024A	No	50W	24V	2.1A	161×97×40	145.00
S82J-05024AD	Yes	50W	24V	2.1A	161×97×40	155.00
S82J-10005A	No	100W	5V	20A	170×97×50	243.00
S82J-10005AD	Yes	100W	5V	20A	170×97×50	253.00
S82J-10012A	No	100W	12V	8.5A	170×97×50	243.00
S82J-10012AD	Yes	100W	12V	8.5A	170×97×50	253.00
S82J-10015A	No	100W	15V	7.0A	170×97×50	243.00
S82J-10015AD	Yes	100W	15V	7.0A	170×97×50	253.00
S82J-10024A	No	100W	24V	4.5A	170×97×50	243.00
S82J-10024AD	Yes	100W	24V	4.5A	170×97×50	253.00
S82J-15024A	No	150W	24V	6.5A	180×97×50	311.00
S82J-15024AD	Yes	150W	24V	6.5A	180×97×50	321.00
S82J-30024	No	300W	24V	14A	181×120×92	614.00
S82J-60024	No	600W	24V	27A	200×170×92	995.00

Cat. No.	Description	Net Price
S82Y-J01K	Cover for 10W models of S82J	\$10.90
S82Y-J02K	Cover for 25W models of S82J	10.90
S82Y-J05K	Cover for 50W models of S82J	10.90
S82Y-J10K	Cover for S82J-10024A	12.80
S82Y-J15K	Cover for 100W and 150W models of S82J (not S82J-10024A)	19.40

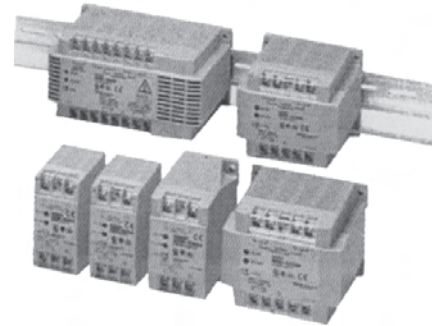

### S82K SWITCH-MODE POWER SUPPLY

- Compact, DIN-rail mounting power supply
- Enclosed unit
- UL508 approvals
- Class 2 approvals (up to 90W)
- Wide power range from 3W to 100W
- 100-240VAC input voltage

Power Ratings	3W	7.5W	15W	30W	50W	90W	100W	240W
Efficiency	60% (5V) to 80% (24V)							
Input								
Frequency	47 to 450Hz							
Noise filter	Yes							
Output								
Adjustment	±10% (not on dual output models)							
Ripple/Noise	2% (p-p max)							
Load regulation	1.5% max (10 to 100% load)							
Line regulation	0.5% max (at 100% load)							
Overload protection	105% (automatic reset)							

Cat. No.	Power	Output		Dimensions	Net Price
		V	A		
S82K-00305	3W	5V	0.6A	75×38×65	\$86.00
S82K-00312	3W	12V	0.25A	75×38×65	86.00
S82K-00315	3W	15V	0.2A	75×38×65	86.00
S82K-00324	3W	24V	0.13A	75×38×65	86.00
S82K-00705	7.5W	5V	1.5A	75×38×65	90.00
S82K-00712	7.5W	12V	0.6A	75×38×65	90.00
S82K-00715	7.5W	15V	0.5A	75×38×65	90.00
S82K-00724	7.5W	24V	0.3A	75×38×65	90.00
S82K-00727	7.5W	±12V	0.3/0.2A	75×38×65	101.00
S82K-00728	7.5W	±15V	0.2/0.2A	75×38×65	101.00
S82K-01505	15W	5V	2.5A	75×45×91	128.00
S82K-01512	15W	12V	1.2A	75×45×91	128.00
S82K-01524	15W	24V	0.6A	75×45×91	128.00
S82K-03005	25W	5V	5.0A	75×90×91	172.00
S82K-03012	30W	12V	2.5A	75×90×91	172.00
S82K-03024	30W	24V	1.3A	75×90×91	172.00
S82K-05024	50W	24V	2.1A	75×90×91	192.00
S82K-09024	90W	24V	3.75A	75×145×91	267.00
S82K-10024	100W	24V	4.2A	7.5×145×91	286.00



## S8VS SWITCHING MODE POWER SUPPLY

### MODELS WITH TOTAL TIME OR MAINTENANCE FORECAST MONITOR

**FEATURES:** Compact, thin size (W x H x D): 22.5 x 85 x 9.6mm. Three mounting directions (standard, horizontal, facing horizontal). Side-by-side mounting directly in panels is possible. Mount to DIN rail. Lead free solder. Safety standards: UL, CSA, VDC and CE.

Cat. No.	Power Ratings	Input Voltage	Output Voltage	Output Current	Net Price
<b>STANDARD MODELS</b>					
S8VS-01505*	15W	100-240 VAC	5V	2.0A	\$90.00
S8VS-01512	15W		12V	1.2A	90.00
S8VS-01524	15W		24V	0.65A	90.00
S8VS-03005**	30W		5V	4.0A	90.00
S8VS-03012	30W		12V	2.5A	90.00
S8VS-03024	30W		24V	1.3A	90.00
S8VS-06024	60W		24V	2.5A	140.00
S8VS-09024	90W		24V	3.75A	210.00
S8VS-12024	120W		24V	5A	260.00
S8VS-18024	180W		24V	7.5A	340.00
S8VS-24024	240W	24V	10A	420.00	

### WITH MAINTENANCE FORECAST MONITOR

S8VS-06024A	60W	100-240 VAC	24V	2.5A	180.00
-------------	-----	-------------	-----	------	--------

### WITH TOTAL RUN TIME MONITOR

S8VS-06024B	60W	100-240 VAC	24V	2.5A	180.00
-------------	-----	-------------	-----	------	--------

### WITH MAINTENANCE FORECAST MONITOR AND UNDERVOLTAGE ALARM (TRANSISTOR (SINKING))

S8VS-12024A	120W	100-240 VAC	24V	5A	300.00
S8VS-18024A	180W		24V	7.5A	390.00
S8VS-18024A	180W		24V	10A	390.00

### WITH MAINTENANCE FORECAST MONITOR AND UNDERVOLTAGE ALARM (TRANSISTOR (SOURCING))

S8VS-09024AP	90W	100-240 VAC	24V	3.75A	250.00
S8VS-12024AP	120W		24V	5A	300.00
S8VS-18024AP	180W		24V	7.5A	390.00
S8VS-24024AP	240W		24V	10A	470.00



### WITH TOTAL RUN TIME MONITOR AND UNDERVOLTAGE ALARM (TRANSISTOR (SINKING))

S8VS-09024B	90W	100-240 VAC	24V	3.75A	250.00
S8VS-12024B	120W		24V	5A	300.00
S8VS-18024B	180W		24V	7.5A	390.00
S8VS-24024B	240W		24V	10A	470.00

### WITH TOTAL RUN TIME MONITOR AND UNDERVOLTAGE ALARM (TRANSISTOR (SOURCING))

S8VS-09024BP	90W	100-240 VAC	24V	3.75A	250.00
S8VS-12024BP	120W		24V	5A	300.00
S8VS-18024BP	180W		24V	7.5A	390.00
S8VS-24024BP	240W		24V	10A	470.00

**NOTE:** \*The output capacity of the S8VS-01505 is 10W. \*\*The output capacity of the S8VS-03005 is 20W.

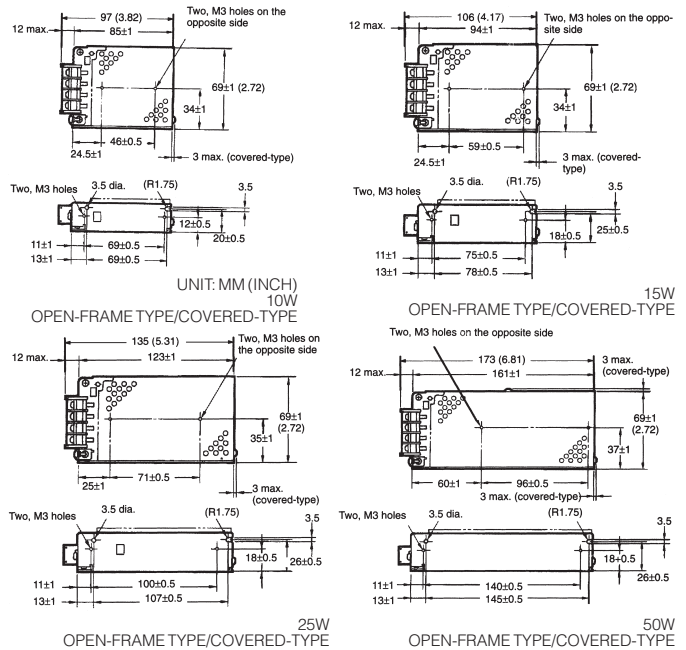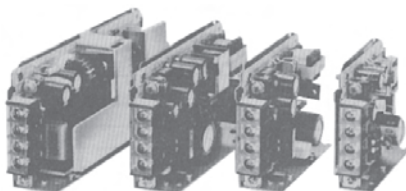


## S8E1 SWITCH-MODE POWER SUPPLY


- Miniature power supplies, from 10W to 50W
- Open-frame or enclosed terminals available
- All models have screw terminals
- Voltage input is AC 120V

Power Ratings	10W	15W	25W	50W
Efficiency	73% (5V) to 83% (24V)			
Input				
Frequency	47 to 450Hz			
Noise filter	Yes			
Output				
Adjustment	±5% (not on dual output models)			
Ripple/Noise	2% (p-p max)			
Load regulation	0.8% max (10 to 100% load)			
Line regulation	0.4% max (at 100% load)			
Overload protection	105% (automatic reset)			


Cat. No.	Style	Power	Output		Dimensions	Net Price
			V	A		
S8E1-01005B	Open-frame	10W	5V	2.0A	69×97×28	\$74.00
S8E1-01005E	Covered	10W	5V	2.0A	69×97×28	78.00
S8E1-01012B	Open-frame	10W	12V	1.0A	69×97×28	74.00
S8E1-01015B	Open-frame	10W	15V	0.7A	69×97×28	74.00
S8E1-01024B	Open-frame	10W	24V	0.5A	69×97×28	74.00
S8E1-01024E	Covered	10W	24V	0.5A	69×97×28	78.00
S8E1-01505B	Open-frame	15W	5V	3.0A	69×106×34	76.00
S8E1-01505E	Covered	15W	5V	3.0A	69×106×34	80.00
S8E1-01512B	Open-frame	15W	12V	1.3A	69×106×34	76.00
S8E1-01512E	Covered	15W	12V	1.3A	69×106×34	80.00
S8E1-01515B	Open-frame	15W	15V	1.0A	69×106×34	76.00
S8E1-01524B	Open-frame	15W	24V	0.7A	69×106×34	76.00
S8E1-01524E	Covered	15W	24V	0.7A	69×106×34	80.00
S8E1-02505B	Open-frame	25W	5V	5.0A	69×135×35	96.00
S8E1-02505E	Covered	25W	5V	5.0A	69×135×35	100.00
S8E1-02512B	Open-frame	25W	12V	2.1A	69×135×35	96.00
S8E1-02512E	Covered	25W	12V	2.1A	69×135×35	100.00
S8E1-02515B	Open-frame	25W	15V	1.7A	69×135×35	96.00
S8E1-02524B	Open-frame	25W	24V	1.1A	69×135×35	96.00
S8E1-02524E	Covered	25W	24V	1.1A	69×135×35	100.00
S8E1-05005B	Open-frame	50W	5V	10A	69×173×37	118.00
S8E1-05005E	Covered	50W	5V	10A	69×173×37	124.00
S8E1-05012B	Open-frame	50W	12V	4.2A	69×173×37	118.00
S8E1-05012E	Covered	50W	12V	4.2A	69×173×37	124.00
S8E1-05015B	Open-frame	50W	15V	3.4A	69×173×37	118.00
S8E1-05024B	Open-frame	50W	24V	2.2A	69×173×37	118.00
S8E1-05024E	Covered	50W	24V	2.2A	69×173×37	124.00



30-W MODELS  
NOTE: UNITS: MM (INCH)



50-W MODELS

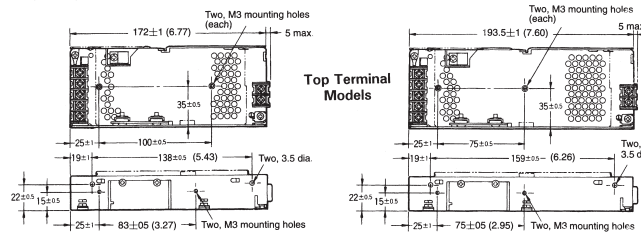

Top Terminal Models

## S8E3 TRIPLE OUTPUT SWITCH-MODE POWER SUPPLY

- Miniature power supplies, 30W and 50W
- Open-frame or enclosed models available
- All models have screw terminals
- Voltage input is AC120V

Power Ratings	30W	50W
Efficiency	73%	
Input		
Frequency	47 to 450Hz	
Noise filter	Yes	
Output		
Adjustment	5% (on V1 only)	
Ripple/Noise	2% (p-p max)	
Load regulation	0.8% max (for V1) 2.5% max (for V2 and V3)	
Line regulation	0.4% max (at 100% load)	
Overload protection	105% for V1 (automatic reset)	

Cat. No.	Style	V1		V2		V3		Dims	Net Price
		V	I	V	I	V	I		
<b>30W</b>									
S8E3-03031B	Open-frame	5V	3.0A	12V	1.2A	-12V	0.3A	196×69×33	\$135.00
S8E3-03031E	Covered	5V	3.0A	12V	1.2A	-12V	0.3A		139.00
S8E3-03032B	Open-frame	5V	3.0A	15V	1.0A	-15V	0.3A		135.00
S8E3-03032E	Covered	5V	3.0A	15V	1.0A	-15V	0.3A		139.00
<b>50W</b>									
S8E3-05031B	Open-frame	5V	5.0A	12V	1.5A	-12V	0.5A	217×69×33	160.00
S8E3-05031E	Covered	5V	5.0A	12V	1.5A	-12V	0.5A		163.00
S8E3-05032B	Open-frame	5V	5.0A	15V	1.2A	-15V	0.5A		160.00
S8E3-05032E	Covered	5V	5.0A	15V	1.2A	-15V	0.5A		163.00

## GIVING YOU WHAT YOU WANT!



- SPEED
- PRODUCTS
- INFORMATION
- PROCUREMENT
- LINKS

IT'S ALL HERE... [www.e-sonic.com](http://www.e-sonic.com)



WIDE RANGE SERIES



DOMESTIC SERIES

## WIDE RANGE INPUT SERIES SWITCHING POWER SUPPLIES

APPROVED BY ALL MAJOR REGULATORY AGENCIES

A/C Input: 90-264 VAC 47/63 Hz via IEC320 Connector. Inrush current: Internally by thermister. Cold start peak current at 250 VAC 25 amps max. Input protection: Internal input line fuse. Regulation: +/-5% typical. Overload protection: Output protected against overload and short circuit. Automatic recovery upon removal of overload condition. Size: MIXX = 5" x 3" x 1.3", M420XX = 4.3" x 2.5" x 1.3", WRI = 6.3" x 3.82" x 2.66", W15XX = 3.3" x 2" x 1.3", W40XX = 4.13" x 2.36" x 1.2", W42XX = 5.8" x 3.3" x 1.5".

Cat. No.	Output 1		Output 2		Output 3		Max. Watts	NetPrice
	VDC	A	VDC	A	VDC	A		
<b>REGULATED TABLETOPS—SINGLE OUTPUT</b>								
W1505-760	5	2.5	—	—	—	—	13	\$53.37
M12007-760	7	2.9	—	—	—	—	20	112.77
W1512-760	12	1.25	—	—	—	—	15	53.37
M42012-760	12	1.7	—	—	—	—	20	58.96
M12612-760	12	2.17	—	—	—	—	26	112.23
W4012-760	12	3.8	—	—	—	—	46	103.25
M12815-760	15	1.9	—	—	—	—	28	112.23
W4015-760	15	3.4	—	—	—	—	51	103.25
M12818-760	18	1.56	—	—	—	—	28	112.77
W4018-760	18	2.8	—	—	—	—	50	103.25
M12824-760	24	1.17	—	—	—	—	28	112.23
W4024-760	24	2.1	—	—	—	—	50	103.25
<b>REGULATED TABLETOPS—DUAL OUTPUT</b>								
W4221-D5	5	3	12	2.5	—	—	42	172.08
WRI3021-D5	5	2	12	1.5	—	—	30	174.14
WRI2721-D5*	5	4	12	0.5	—	—	27	155.37
<b>REGULATED TABLETOPS—TRIPLE OUTPUT</b>								
W4231-D5	5	3	12	2.5	-12	0.5	42	172.08
W4232-D5	5	4.8	12	1.5	-12	0.5	42	172.08

\*Minimum load 2 watts for full regulation.


## DOMESTIC INPUT SERIES LINEAR POWER SUPPLIES

APPROVED BY CSA, NRTL(UL)

A/C Input: 108-132 VAC 80 Hz. Regulation: +/-6%. Overload protection: Output protected against overload and short circuit. Automatic recovery upon removal of overload condition. Size: WP11XX = 2.2" x 1.8" x 1.1", WP12XX = 3" x 2" x 1", WMXXX = VARIOUS.

Cat. No.	Output 1		Output 2		Output 3		Max. Watts	NetPrice
	VDC	A	VDC	A	VDC	A		
<b>REGULATED WALLMOUNT UNITS—SINGLE OUTPUT</b>								
WM050-1950-760	5	1.2	—	—	—	—	6	\$28.68
WM075-1950-760	5	1.5	—	—	—	—	7.5	47.39
WP1105-760	5	1.6	—	—	—	—	8	38.69
WM101-1950-760	5	2	—	—	—	—	10	47.62
WP1205-760	5	2.4	—	—	—	—	12	40.53
WM060-1950-760	12	0.5	—	—	—	—	6	37.41
WP1112-760	12	0.8	—	—	—	—	10	40.03
WP1212-760	12	1	—	—	—	—	12	40.53
WP1224-760	24	0.5	—	—	—	—	12	40.53
WM144-1950-S*	12	1.2	—	—	—	—	14.4	54.87
WM061-1950-760	15	0.4	—	—	—	—	6	48.97
WP1218-760	18	0.67	—	—	—	—	12	40.72
WM080-1950-760	24	0.33	—	—	—	—	8	34.92
<b>REGULATED—DUAL OUTPUT</b>								
WM090-1950-D5	5	0.7	-5	0.7	—	—	7	52.63
WM112-D5	5	0.8	12	0.7	—	—	12.4	60.43
WM070-1950-D5	5	0.6	12	0.33	—	—	7	44.27
WM072-1950-D5	12	0.3	-12	0.3	—	—	7.2	42.40
WM071-1950-D5	15	0.24	-15	0.24	—	—	7.5	44.27
<b>REGULATED—TRIPLE OUTPUT</b>								
WM063-1950-D5	5	0.6	12	0.16	-12	0.16	6.3	51.13
WM113-S	5	0.86	12	0.3	-12	0.3	11.3	63.60

\*S = Shield DC output cable.

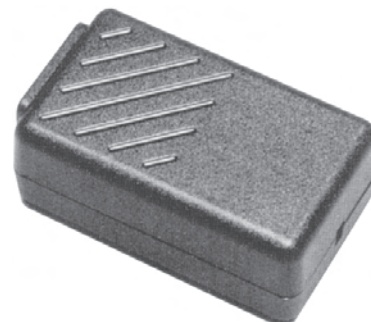

## FAST-TRACK POWER SUPPLIES

**FEATURES:** Wide range AC input. Fully enclosed plastic case. Fully regulated output. High efficiency. Over voltage and current protection. Operating temperature: 0°C to 40°C. EMI: Meets FCC class B, CISPR 22 class B. Safety: UL, CSA and CE Marked. Output connector: Barrel type, except FW72 and FW100 which are 5 pin DIN. **SPECIFICATIONS:** Input voltage: 100-240VAC. Input frequency: 47-63Hz. Input connector: 3 pin IEC 320 input receptacle. Ripple/noise (V<sub>pp</sub>): +/-1% (20 MHz bandwidth). AC cord optional.

Cat. No.	Voltage	Power	Current	Dimensions (In.)	Net Price
FW1805-760	5V	15W	3.00A	3.35 x 1.97 x 1.3	\$41.25
FW1812-760	12V	18W	1.50A	3.35 x 1.97 x 1.3	40.60
FW1824-760	24V	18W	0.75A	3.35 x 1.97 x 1.3	40.60
FW3012-760	12V	30W	2.5A	4.25 x 2.54 x 1.3	58.36
FW3024-760	24V	30W	1.25A	4.25 x 2.54 x 1.3	58.36
FW5012-760	12V	50W	4.16A	5.0 x 3.0 x 1.3	67.34
FW5024-760	24V	50W	2.08A	5.0 x 3.0 x 1.3	67.34
FW7212-D5	12V	72W	6.0A	6.5 x 3.85 x 2.6	88.31
FW7224-D5	24V	72W	3.0A	6.5 x 3.85 x 2.6	88.31
FW10012-D5	12V	100W	8.0A	6.5 x 3.85 x 2.6	65.13
FW10024-D5	24V	100W	4.0A	6.5 x 3.85 x 2.6	90.76