



















Features

- · Constant Current mode output
- · Circular metal housing with class I design
- · Built-in active PFC function
- · IP67 / IP65 rating for indoor or outdoor installations
- Function options: output adjustable via potentiometer;
 3 in 1 dimming; DALI
- Typical lifetime>50000 hours
- 5 years warranty


Applications

- LED bay lighting
- · LED stage lighting
- LED spot lighting
- Type "HL" for use in Class I, Division 2 hazardous (Classified) location.

Description

HBG-100 series is a 100W AC/DC LED driver featuring the circular shape design. It operates from 90~305VAC and offers the constant current output models with different rated voltage between 24V and 60V. Thanks to the high efficiency up to 91.5%, with the fanless design, the entire series is able to operate for -40 $^{\circ}$ C $^{\circ}$ +85 $^{\circ}$ C case temperature under free air convection. The design of metal housing and IP67/IP65 ingress protection level allows this series to fit both indoor and outdoor applications. HBG-100 is equipped with various function options, such as dimming methodologies, so as to provide the optimal design flexibility for LED lighting system.

Model Encoding

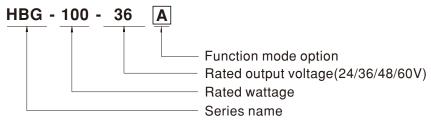

Type	IP Level	Function	Note
Blank	IP67	lo fixed.	In Stock
Α	IP65	Io adjustable through built-in potentiometer.	In Stock
В	IP67	3 in 1 dimming function (1~10Vdc, 10V PWM signal and resistance)	In Stock
AB	IP65	lo adjustable through built-in potentiometer with 3 in 1 dimming function	In Stock
DA	IP67	DALI control technology.	In Stock



100W Constant Current Mode LED Driver


SPECIFICATION

MODEL		HBG-100-24	HBG-100-36	HBG-100-48	HBG-100-60		
WODEL	DATED CUDDENT						
	RATED CURRENT	4A	2.7A	2A	1.6A		
	RATED POWER	96W	97.2W	96W	96W		
	CONSTANT CURRENT REGION Note.2		21.6 ~ 36V	28.8 ~ 48V	36 ~ 60V		
	OPEN CIRCUIT VOLTAGE(max.)	25V	37V	49V	62V		
	CURRENT ADJ. RANGE	Adjustable for A/AB-Type (via b	uilt-in potentiometer)				
	CONNENT ADD. NAMOE	2.4 ~ 4A	1.62 ~ 2.7A	1.2 ~ 2A	1.0 ~ 1.6A		
	CURRENT RIPPLE	5.0% max. @rated current					
	CURRENT TOLERANCE	±5.0%					
	SETUP TIME Note.4	2000ms / 115VAC 500ms / 230VAC					
		90 ~ 305VAC 127 ~ 431VDC					
	VOLTAGE RANGE Note.3	(Please refer to "STATIC CHARACTERISTIC" section)					
	FREQUENCY RANGE	47 ~ 63Hz					
		PF>0.96/115VAC, PF>0.96/230VAC, PF>0.94/277VAC@full load					
-	POWER FACTOR	PF>0.96/115VAC, PF>0.96/230VAC, PF>0.94/277VAC@full load (Please refer to "POWER FACTOR (PF) CHARACTERISTIC" section)					
	TOTAL HARMONIC DISTORTION	THD<20%(@load≧60%/115VC,230VAC; @load≧75%/277VAC)					
	EFFICIENCY (T.)	(Please refer to "TOTAL HARMONIC DISTORTION(THD)" section)					
-	EFFICIENCY (Typ.) Note.5		91%	91%	91.5%		
	AC CURRENT (Typ.)	1.1A / 115VAC 0.5A / 230V					
	INRUSH CURRENT (Typ.)	COLD START 60A(twidth=550µs measured at 50% Ipeak) at 230VAC; Per NEMA 410					
	MAX. No. of PSUs on 16A	4 units (circuit breaker of type B) / 8 units (circuit breaker of type C) at 230VAC					
	CIRCUIT BREAKER	(,	, · · · · · · · · · · · · · · · · · · ·			
	LEAKAGE CURRENT	<0.75mA / 277VAC					
	NO LOAD / STANDBY	Standby power consumption <0.5W for B/AB/DA-Type					
	POWER CONSUMPTION	Blank/A-Type please refer to Note. 7					
		95 ~ 108%					
	OVER CURRENT	Constant current limiting					
		28 ~ 35V	41 ~ 49V	54 ~ 63V	65 ~ 75V		
PROTECTION	OVER VOLTAGE	Shut down o/p voltage re-power		10.00.	1 30 .01		
	OVER TEMPERATURE	Shut down o/p voltage re-power	· · · · · · · · · · · · · · · · · · ·				
	WORKING TEMP.		er to "OUTPUT LOAD vs TEMPE	DATUDE"tion			
			ETTO OUTPUT LOAD VS TEMPE	RATURE Section)			
	MAX. CASE TEMP.	Tcase=+85°C					
-	WORKING HUMIDITY	20 ~ 95% RH non-condensing					
	STORAGE TEMP., HUMIDITY	-40 ~ +80°C, 10 ~ 95% RH					
	TEMP. COEFFICIENT	±0.03%/°C (0 ~ 50°C)					
	VIBRATION	10 ~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes					
	SAFETY STANDARDS	UL8750(type"HL"), CSA C22.2 No.250.13-12, ENEC BS EN/EN61347-1,BS EN/EN61347-2-13 independent, BS EN/EN62384;					
	DALLOTANDARRO	GB19510.1, GB19510.14, BIS IS15885(for 36A,48A,60A only), EAC TP TC 004,IP65 or IP67 approved					
0.45577.0	DALI STANDARDS	Compliance to IEC62386-101, 102, 207 for DA-Type only					
SAFETY &	WITHSTAND VOLTAGE	I/P-O/P:3.75KVAC I/P-FG:2KVAC O/P-FG:0.5KVAC					
	ISOLATION RESISTANCE	DLATION RESISTANCE I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25°C / 70% RH					
	EMC EMISSION Note.7	Compliance to BS EN/EN55015, BS EN/EN61000-3-2 Class C (@load ≥ 60%) ; BS EN/EN61000-3-3,					
	Hote./	GB17743 and GB17625.1, EAC TP TC 020					
	EMC IMMUNITY	Compliance to BS EN/EN61000-4-2,3,4,5,6,8,11, BS EN/EN61547,light industry level (surge immunity:Line-Earth:4KV,					
		Line-Line:2KV), EAC TP TC 020					
OTHERS	MTBF		R-332 (Bellcore); 300Khrs min.	MIL-HDBK-217F (25°C)			
	DIMENSION	φ 130mm *66.5mm (D * H)					
	PACKING	1.18Kg; 12pcs/15.7Kg/1.43CUF	T(Blank/A/B Type),1.89CUFT(E	Type)			
NOTE	1. All parameters NOT specia	lly mentioned are measured at	230VAC input, rated current ar	nd 25 $^\circ\!\mathbb{C}$ of ambient temper	ature.		
	2. Please refer to "DRIVING METHODS OF LED MODULE".						
	3. De-rating may be needed under low input voltages. Please refer to "STATIC CHARACTERISTIC" sections for details.						
	4. Length of set up time is measured at cold first start. Turning ON/OFF the driver may lead to increase of the set up time.						
	5. The DA type power supply is less efficient than the typical efficiency in specification by 1%.						
	6. The driver is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected						
	by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.						
	7. To fulfill requirements of the latest ErP regulation for lighting fixtures, this LED driver can only be used behind a switch without permanently						
	connected to the mains.						
	8. This series meets the typical life expectancy of >50,000 hours of operation when Tcase, particularly (to point (or TMP, per DLC), is about 75°C or less.						
	9. Please refer to the warranty statement on MEAN WELL's website at http://www.meanwell.com						
	10. The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft). 11. For any application note and IP water proof function installation caution, please refer our user manual before using.						
	11. For any application note and IP water proof function installation caution, please refer our user manual before using. https://www.meanwell.com/Upload/PDF/LED_EN.pdf						
	1	•		3			
	https://www.meanwell.com/	'Upload/PDF/LED_EN.pdf	e refer to https://www.meanwell.	_	v		




■ BLOCK DIAGRAM

fosc: 100KHz

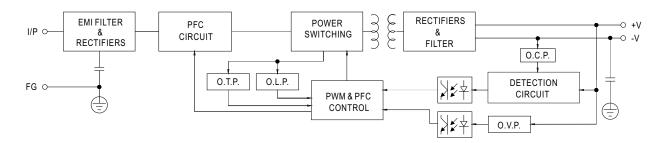

■ DRIVING METHODS OF LED MODULE

 $\ensuremath{\mathbb{X}}$ This series works in constant current mode to directly drive the LEDs.

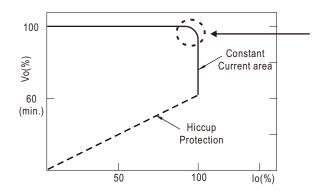

Typical output current normalized by rated current (%)

In the constant current region, the highest voltage at the output of the driver depends on the configuration of the end systems.

Should there be any compatibility issues, please contact MEAN WELL.




■ DIMMING OPERATION

* DIM+ for B/AB-Type


* *DIM- for B/AB-Type DA- for DA-Type

DA+ for DA-Type

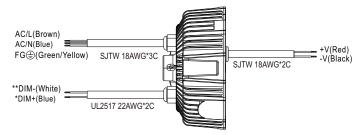


※ 3 in 1 dimming function (for B/AB-Type)

- Output constant current level can be adjusted by applying one of the three methodologies between DIM+ and DIM-:
 1 ~ 10VDC, or 10V PWM signal or resistance.
- Direct connecting to LEDs is suggested. It is not suitable to be used with additional drivers.
- Dimming source current from power supply: 100µA (typ.)
- O Applying additive 1 ~ 10VDC

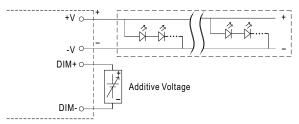


"DO NOT connect "DIM- to -V"

O Applying additive 10V PWM signal (frequency range 100Hz ~ 3KHz):

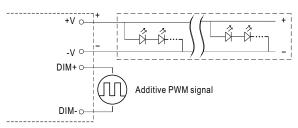



"DO NOT connect "DIM- to -V"


Applying additive resistance:

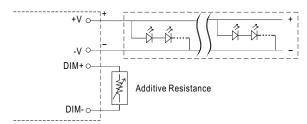

"DO NOT connect "DIM- to -V"










Note: In the case of turning the lighting fixture down to 0% brightness, please refer to the configuration as follow, or please contact MEAN WELL for other options.

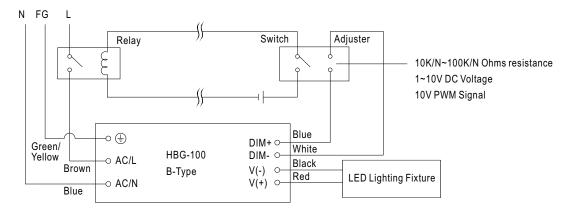


Using a switch and relay can turn ON/OFF the lighting fixture.

X DALI Interface (primary side; for DA-Type)


- · Apply DALI signal between DA+ and DA-.
- DALI protocol comprises 16 groups and 64 addresses.
- First step is fixed at 8% of output.



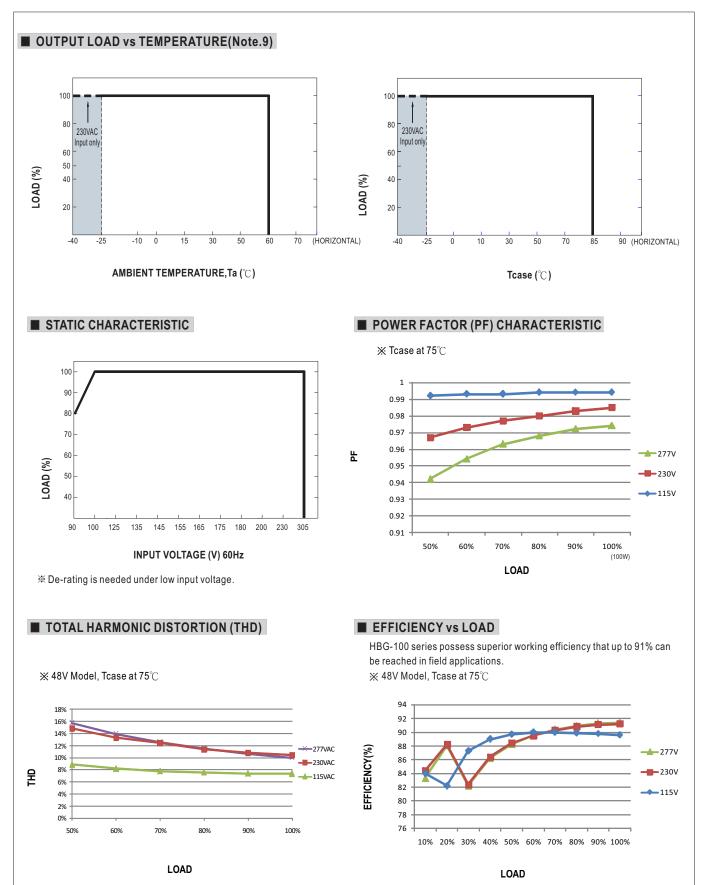



■ LIFE TIME

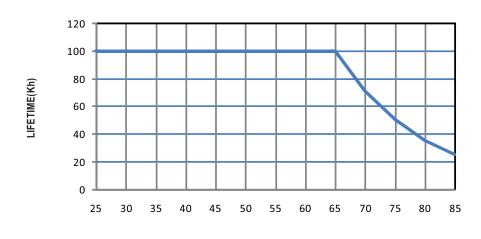


Tcase ($^{\circ}\!\mathbb{C}$)



■ MECHANICAL SPECIFICATION


Case No.217 Unit:mm

※ Blank-Type

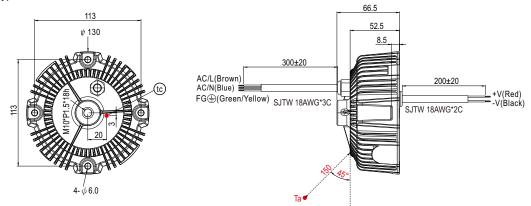


- (to): Max. Case Temperature.(case temperature measured point)
- Ta: Ambient Temperature measured point

% A-Type

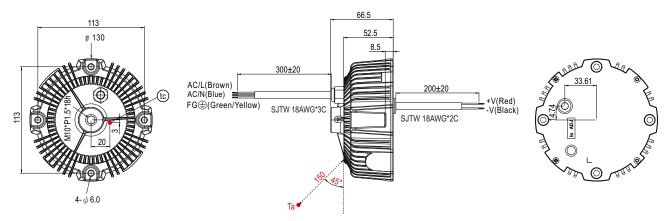

- tc : Max. Case Temperature.(case temperature measured point)
- Ta: Ambient Temperature measured point


፠ B/DA-Type

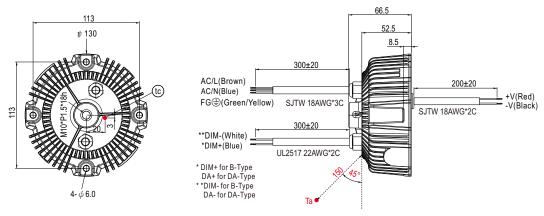

- (to): Max. Case Temperature.(case temperature measured point)
- Ta: Ambient Temperature measured point



※ AB-Type

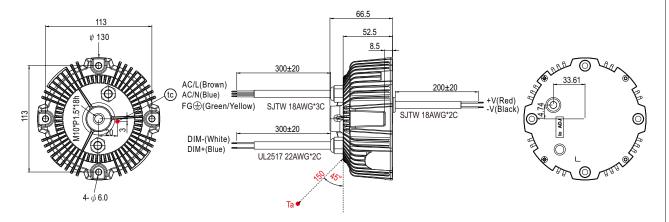

- (tc): Max. Case Temperature.(case temperature measured point)
- Ta: Ambient Temperature measured point

■ INSTALLATIONS



Caution

- Please inspect the appearance of the driver if the package is damaged. There should not be any cracks.
- · Please do not drop or bump the driver.
- · All screws including the suspension screw should be paired with a spring washer and locked tight.
- \cdot The entire luminaire, including the driver, should be limited to 10Kg or less.
- · The luminaire should be cautiously protected from damage due to shock throughout packaging and transportation.
- · Please thoroughly follow the preceding cautionary notes to prevent the luminaire from falling, leading to injuries.