
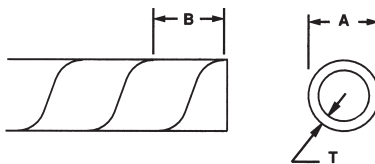


# Panduit Spiral Wrapping

MANU  
356  
CODE



## PANDUIT SPIRAL WRAPPING

**FEATURES:** Largest variety of colours, materials and sizes in the industry. Available in seven different materials and twelve different colours. Colours conform to communications. Wiring Standards. Flexible, neat, fast. Allows breakouts of single/multiple wires and rerouting of replacement wires. Harness multiple cables into a single manageable bundle. Abrasion protection for wires, cables, hoses and tubing. **APPLICATIONS:** Organize wire for communication and computer equipment where access to the wires is required. In OEM applications for protecting tubes and harnesses. Abrasion protection for control panel wiring. Personal computer and printer wire organization. Protect glass tubes from abrasion and breakage. Kink-proofing for all kinds of tubing...ideal for laboratories. Eliminates lacing cord and tie-offs. Use orange spiral wrapping for protecting and identifying fiber optic cables.

Cat. No.	Material	Colour	A In. (mm)	B In. (mm)	T In. (mm)	Bundle Size In. (mm)	Length	Net Price
T12F-C	Polyethylene	Natural	0.125" (3.2)	0.218" (5.5)	0.03" (.76)	1/16" (1.6) - 1/2" (12.7)	100' (30.5M)	\$49.60
T19F-C		Natural	0.188" (4.8)	0.250" (6.4)	0.035" (0.89)	1/8" (3.2) - 1" (25.4)	100' (30.5M)	61.99
T25F-C		Natural	0.25" (6.4)	0.375" (9.5)	0.04" (1.02)	3/16" (4.8) - 2" (50.8)	100' (30.5M)	66.96
T25F-C1		Brown	0.25" (6.4)	0.375" (9.5)	0.04" (1.02)	3/16" (4.8) - 2" (50.8)	100' (30.5M)	76.97
T25F-C16		Pink	0.25" (6.4)	0.375" (9.5)	0.04" (1.02)	3/16" (4.8) - 2" (50.8)	100' (30.5M)	76.97
T25F-C2		Red	0.25" (6.4)	0.375" (9.5)	0.04" (1.02)	3/16" (4.8) - 2" (50.8)	100' (30.5M)	76.97
T25F-C3		Orange	0.25" (6.4)	0.375" (9.5)	0.04" (1.02)	3/16" (4.8) - 2" (50.8)	100' (30.5M)	76.97
T25F-C4		Yellow	0.25" (6.4)	0.375" (9.5)	0.04" (1.02)	3/16" (4.8) - 2" (50.8)	100' (30.5M)	76.97
T25F-C5		Green	0.25" (6.4)	0.375" (9.5)	0.04" (1.02)	3/16" (4.8) - 2" (50.8)	100' (30.5M)	76.97
T25F-C6		Blue	0.25" (6.4)	0.375" (9.5)	0.04" (1.02)	3/16" (4.8) - 2" (50.8)	100' (30.5M)	76.97
T25F-C7		Purple	0.25" (6.4)	0.375" (9.5)	0.04" (1.02)	3/16" (4.8) - 2" (50.8)	100' (30.5M)	76.97
T25F-C8		Grey	0.25" (6.4)	0.375" (9.5)	0.04" (1.02)	3/16" (4.8) - 2" (50.8)	100' (30.5M)	76.97
T38F-C	Natural	0.375" (9.5)	0.437" (11.1)	0.055" (1.4)	5/16" (7.9) - 3" (76.2)	100' (30.5M)	120.87	
T50F-X	Natural	0.5" (12.7)	0.5" (12.7)	0.06" (1.5)	3/8" (9.5) - 4" (101.6)	10' (3.0M)	18.46	
T50F-C	Natural	0.5" (12.7)	0.5" (12.7)	0.06" (1.5)	3/8" (9.5) - 4" (101.6)	100' (30.5M)	182.55	
T50F-C1	Weather Resistant Polyethylene	Brown	0.5" (12.7)	0.5" (12.7)	0.06" (1.5)	3/8" (9.5) - 4" (101.6)	100' (30.5M)	209.90
T50F-C1		Brown	0.5" (12.7)	0.5" (12.7)	0.06" (1.5)	3/8" (9.5) - 4" (101.6)	100' (30.5M)	209.90
T50F-C10		White	0.5" (12.7)	0.5" (12.7)	0.06" (1.5)	3/8" (9.5) - 4" (101.6)	100' (30.5M)	209.90
T50F-C16		Pink	0.5" (12.7)	0.5" (12.7)	0.06" (1.5)	3/8" (9.5) - 4" (101.6)	100' (30.5M)	209.90
T50F-C3		Orange	0.5" (12.7)	0.5" (12.7)	0.06" (1.5)	3/8" (9.5) - 4" (101.6)	100' (30.5M)	209.90
T50F-C4		Yellow	0.5" (12.7)	0.5" (12.7)	0.06" (1.5)	3/8" (9.5) - 4" (101.6)	100' (30.5M)	209.90
T50F-C5		Green	0.5" (12.7)	0.5" (12.7)	0.06" (1.5)	3/8" (9.5) - 4" (101.6)	100' (30.5M)	209.90
T50F-C6		Blue	0.5" (12.7)	0.5" (12.7)	0.06" (1.5)	3/8" (9.5) - 4" (101.6)	100' (30.5M)	209.90
T50F-C7		Purple	0.5" (12.7)	0.5" (12.7)	0.06" (1.5)	3/8" (9.5) - 4" (101.6)	100' (30.5M)	209.90
T50F-C8		Grey	0.5" (12.7)	0.5" (12.7)	0.06" (1.5)	3/8" (9.5) - 4" (101.6)	100' (30.5M)	209.90
T62F-C		Natural	0.625" (15.9)	0.625" (15.9)	0.062" (1.57)	1/2" (12.7) - 4 1/2" (114.3)	100' (30.5M)	199.34
T75F-C		Natural	0.75" (19.1)	0.875" (22.2)	0.065" (1.65)	5/8" (15.9) - 5" (127)	100' (30.5M)	222.36
T100F-C	Natural	1" (25.4)	1.125" (28.6)	0.07" (1.78)	7/8" (22.2) - 6" (152.4)	100' (30.5M)	255.84	
T12F-C0	Weather Resistant Polyethylene	Black	0.125" (3.2)	0.218" (5.5)	0.03" (.76)	1/16" (1.6) - 1/2" (12.7)	100' (30.5M)	59.58
T25F-X0		Black	0.25" (6.4)	0.375" (9.5)	0.04" (1.02)	3/16" (4.8) - 2" (50.8)	10' (3.0M)	10.89
T25F-C0		Black	0.25" (6.4)	0.375" (9.5)	0.04" (1.02)	3/16" (4.8) - 2" (50.8)	100' (30.5M)	88.38
T50F-X0		Black	0.5" (12.7)	0.5" (12.7)	0.06" (1.5)	3/8" (9.5) - 4" (101.6)	10' (3.0M)	23.25
T50F-C0		Black	0.5" (12.7)	0.5" (12.7)	0.06" (1.5)	3/8" (9.5) - 4" (101.6)	100' (30.5M)	228.24
T62F-C0		Black	0.625" (15.9)	0.625" (15.9)	0.062" (1.57)	1/2" (12.7) - 4 1/2" (114.3)	100' (30.5M)	249.19
T75F-C0	Black	0.75" (19.1)	0.875" (22.2)	0.065" (1.65)	5/8" (15.9) - 5" (127)	100' (30.5M)	278.09	
T100F-C0	Black	1" (25.4)	1.125" (28.6)	0.07" (1.78)	7/8" (22.2) - 6" (152.4)	100' (30.5M)	319.13	
T19R-C	Retardant Polyethylene (U.L. V2)	White	0.188" (4.8)	0.250" (6.4)	0.035" (0.89)	1/8" (3.2) - 1" (25.4)	100' (30.5M)	89.14
T25R-C		White	0.25" (6.4)	0.375" (9.5)	0.04" (1.02)	3/16" (4.8) - 2" (50.8)	100' (30.5M)	104.21
T25R-C20		Black	0.25" (6.4)	0.375" (9.5)	0.04" (1.02)	3/16" (4.8) - 2" (50.8)	100' (30.5M)	119.52
T38R-C		White	0.375" (9.5)	0.437" (11.1)	0.055" (1.4)	5/16" (7.9) - 3" (76.2)	100' (30.5M)	166.60
T50R-C		White	0.5" (12.7)	0.5" (12.7)	0.06" (1.5)	3/8" (9.5) - 4" (101.6)	100' (30.5M)	272.60
T62R-C		White	0.625" (15.9)	0.625" (15.9)	0.062" (1.57)	1/2" (12.7) - 4 1/2" (114.3)	100' (30.5M)	279.48
T75R-C	White	0.75" (19.1)	0.875" (22.2)	0.065" (1.65)	5/8" (15.9) - 5" (127)	100' (30.5M)	306.55	
T100R-C	White	1" (25.4)	1.125" (28.6)	0.07" (1.78)	7/8" (22.2) - 6" (152.4)	100' (30.5M)	352.58	
T12FR-C	Flame Retardant Polyethylene (U.L. V0)	White	0.125" (3.2)	0.218" (5.5)	0.03" (.76)	1/16" (1.6) - 1/2" (12.7)	100' (30.5M)	69.75
T12FR-C20		Black	0.125" (3.2)	0.218" (5.5)	0.03" (.76)	1/16" (1.6) - 1/2" (12.7)	100' (30.5M)	79.88
T19FR-C		White	0.188" (4.8)	0.250" (6.4)	0.032" (0.81)	1/8" (3.2) - 1" (25.4)	100' (30.5M)	112.64
T19FR-C20		Black	0.188" (4.8)	0.250" (6.4)	0.032" (0.81)	1/8" (3.2) - 1" (25.4)	100' (30.5M)	112.64
T25FR-C		White	0.25" (6.4)	0.375" (9.5)	0.04" (1.02)	3/16" (4.8) - 2" (50.8)	100' (30.5M)	114.61
T25FR-C20		Black	0.25" (6.4)	0.375" (9.5)	0.04" (1.02)	3/16" (4.8) - 2" (50.8)	100' (30.5M)	131.45
T38FR-C		White	0.375" (9.5)	0.437" (11.1)	0.055" (1.4)	5/16" (7.9) - 3" (76.2)	100' (30.5M)	183.23
T38FR-C20		Black	0.375" (9.5)	0.437" (11.1)	0.055" (1.4)	5/16" (7.9) - 3" (76.2)	100' (30.5M)	209.83
T50FR-C		White	0.5" (12.7)	0.5" (12.7)	0.06" (1.5)	3/8" (9.5) - 4" (101.6)	100' (30.5M)	302.26
T50FR-C20		Black	0.5" (12.7)	0.5" (12.7)	0.06" (1.5)	3/8" (9.5) - 4" (101.6)	100' (30.5M)	346.18
T62FR-C20		White	0.625" (15.9)	0.625" (15.9)	0.062" (1.57)	1/2" (12.7) - 4 1/2" (114.3)	100' (30.5M)	355.25
T62FR-C20		Black	0.625" (15.9)	0.625" (15.9)	0.062" (1.57)	1/2" (12.7) - 4 1/2" (114.3)	100' (30.5M)	355.25
T75FR-C	White	0.75" (19.1)	0.875" (22.2)	0.065" (1.65)	5/8" (15.9) - 5" (127)	100' (30.5M)	337.20	
T75FR-C20	Black	0.75" (19.1)	0.875" (22.2)	0.065" (1.65)	5/8" (15.9) - 5" (127)	100' (30.5M)	386.17	
T100FR-C	White	1" (25.4)	1.125" (28.6)	0.07" (1.78)	7/8" (22.2) - 6" (152.4)	100' (30.5M)	383.41	
T100FR-C20	Black	1" (25.4)	1.125" (28.6)	0.07" (1.78)	7/8" (22.2) - 6" (152.4)	100' (30.5M)	440.02	

†TEFLON or equivalent fluorocarbon PTFE material is used. TEFLON is a registered trademark of E.I. DuPont Co.

Continued on next page....

1070

PARTS INDICATED WITH A LEAF ARE CONSIDERED RoHS JULY 2006 COMPLIANT  
BASED ON THE MANUFACTURER'S CONFIRMATION AT THE TIME OF PUBLISHING.  
PRICES SUBJECT TO CHANGE WITHOUT NOTICE, APPLICABLE TAXES NOT INCLUDED

electrosonic

# Panduit Spiral Wrapping

MANU  
356  
CODE

Cat. No.	Material	Colour	A In. (mm)	B In. (mm)	T In. (mm)	Bundle Size In. (mm)	Length	Net Price	
∅ T12N-C	Nylon (Black Nylon is weather resistant)	Natural	0.125" (3.2)	0.218" (5.5)	0.015" (.38)	1/16" (1.6) - 1/2" (12.7)	100' (30.5M)	\$89.17	
∅ T12N-C0		Black	0.125" (3.2)	0.218" (5.5)	0.015" (.38)	1/16" (1.6) - 1/2" (12.7)	100' (30.5M)	112.33	
∅ T19N-C		Natural	0.188" (4.8)	0.250" (6.4)	0.020" (0.51)	1/8" (3.2) - 1" (25.4)	100' (30.5M)	163.23	
∅ T19N-C0		Black	0.188" (4.8)	0.250" (6.4)	0.020" (0.51)	1/8" (3.2) - 1" (25.4)	100' (30.5M)	163.23	
∅ T25N-C		Natural	0.25" (6.4)	0.375" (9.5)	0.023" (.58)	3/16" (4.8) - 2" (50.8)	100' (30.5M)	162.12	
∅ T25N-C0		Black	0.25" (6.4)	0.375" (9.5)	0.023" (.58)	3/16" (4.8) - 2" (50.8)	100' (30.5M)	202.65	
∅ T38N-C		Natural	0.375" (9.5)	0.437" (11.1)	0.03" (.76)	5/16" (7.9) - 3" (76.2)	100' (30.5M)	275.18	
∅ T38N-C0		Black	0.375" (9.5)	0.437" (11.1)	0.03" (.76)	5/16" (7.9) - 3" (76.2)	100' (30.5M)	302.72	
∅ T50N-C		Natural	0.5" (12.7)	0.5" (12.7)	0.032" (.81)	3/8" (9.5) - 4" (101.6)	100' (30.5M)	477.99	
∅ T50N-C0		Black	0.5" (12.7)	0.5" (12.7)	0.032" (.81)	3/8" (9.5) - 4" (101.6)	100' (30.5M)	597.46	
∅ T62N-C	TEFLON†	Natural	0.625" (15.9)	0.625" (15.9)	0.035" (.89)	1/2" (12.7) - 4 1/2" (114.3)	100' (30.5M)	671.62	
∅ T62N-C0		Black	0.625" (15.9)	0.625" (15.9)	0.035" (.89)	1/2" (12.7) - 4 1/2" (114.3)	100' (30.5M)	899.99	
∅ T75N-C		Natural	0.75" (19.1)	0.875" (22.2)	0.4" (1.01)	5/8" (15.9) - 5" (127)	100' (30.5M)	835.96	
∅ T75N-C0		Black	0.75" (19.1)	0.875" (22.2)	0.4" (1.01)	5/8" (15.9) - 5" (127)	100' (30.5M)	1180.15	
∅ T100N-C		Natural	1" (25.4)	1.125" (28.6)	0.045" (1.0)	7/8" (22.2) - 6" (152.4)	100' (30.5M)	1170.31	
∅ T100N-C0		Black	1" (25.4)	1.125" (28.6)	0.045" (1.0)	7/8" (22.2) - 6" (152.4)	100' (30.5M)	1462.92	
∅ T12T-C		TEFLON†	Natural	0.125" (3.2)	0.218" (5.5)	0.02" (.5)	1/16" (1.6) - 1/2" (12.7)	100' (30.5M)	532.67
∅ T19T-C			Natural	0.188" (4.8)	0.250" (6.4)	0.03" (.76)	1/8" (3.2) - 1" (25.4)	100' (30.5M)	764.73
∅ T25T-L			Natural	0.25" (6.4)	0.375" (9.5)	0.03" (.76)	3/16" (4.8) - 2" (50.8)	50' (15.2M)	486.79
∅ T50T-Q			Natural	0.5" (12.7)	0.5" (12.7)	0.03" (.76)	3/8" (9.5) - 4" (101.6)	25' (7.6M)	506.89
∅ T62T-Q	Natural		0.625" (15.9)	0.625" (15.9)	0.03" (.76)	1/2" (12.7) - 4 1/2" (114.3)	25' (7.6M)	632.88	
∅ T75T-X	Natural		0.75" (19.1)	0.875" (22.2)	0.03" (.76)	5/8" (15.9) - 5" (127)	10' (3.0M)	353.89	
∅ T100T-X	Natural		1" (25.4)	1.125" (28.6)	0.04" (1.01)	7/8" (22.2) - 6" (152.4)	10' (3.0M)	547.02	

†TEFLON or equivalent fluorocarbon PTFE material is used. TEFLON is a registered trademark of E.I. DuPont Co.







## PANDUIT PAN-WRAP™ SPLIT HARNESS WRAP

Pan-Wrap Split Harness Wrap is an innovative addition to the Panduit Abrasion Protection Line. Engineered for wire harness protection. Pan-Wrap bundles and protects wire, cable, and hoses. The Pan-Wrap design provides full 360° coverage with pre-cut slots for break-outs to maximize reliability and reduce installation time. **FEATURES:** Flexible design allows maneuverability and protects wire and cables during movement. Installation tool reduces installation time and lowers installed cost.

Cat. No.	Size I.D. In. (mm)	Maximum Bundle Diameter In. (mm)	Material	Colour	Length Ft. (M)	Net Price
∅ PW50F-T	0.50 (12.7)	0.55 (13.97)	Polyethylene	Natural	200 (61.05)	\$263.03
∅ PW75F-C	0.75 (19.05)	0.80 (20.32)	Polyethylene	Natural	100 (30.48)	189.73
∅ PW50F-T20	0.50 (12.7)	0.55 (13.97)	Polyethylene	Black	200 (61.05)	288.90
∅ PW75F-C20	0.75 (19.05)	0.80 (20.32)	Polyethylene	Black	100 (30.48)	204.82

### INSTALLATION TOOL

Cat. No.	Material	Colour	Size (In.)	Net Price
∅ PWT50	ABS	White	0.50	\$8.72
∅ PWT75	ABS	White	0.75	9.11



## PANDUIT GROMMET EDGING

Protects and insulates wires and cables from chafing against sharp edges. Choose from five materials—**Nylon:** Self extinguishing. For indoor use up to 149°F (65°C). **Polyethylene:** General purpose material for indoor use up to 122°F (50°C). Style GEE and GES provided in .030" (0.88mm) thick material, making them highly flexible. Available with slotted or solid wall construction. **Weather Resistant Polyethylene:** For outdoor use to 122°F (50°C). Excellent resistance to acid rain and ultra-violet light. **Flame Retardant Polyethylene:** UL94-0 rated material. Will not support a flame. Available in slotted or solid wall construction. **Adhesive Lined Polyethylene:** Base is lined with a pressure sensitive adhesive. Available in natural and weather resistant Adhesive ensures that the product will stay where it is installed.

Continued on next page....


# Panduit Spiral Wrapping

Cat. No.	Material	Colour	Panel Thickness In. (mm)	Dimensions—In. (mm)		Feet Per Pkg.	Net Price
				A	B		
GEE36F-C	Continuous Polyethylene (Slotted Wall)	Natural	.026" (.7) - .036" (.9)	.106" (2.7)	.117" (3.0)	100' (30.5M)	\$56.21
GEE36F-C0		Black	.026" (.7) - .036" (.9)	.106" (2.7)	.117" (3.0)	100' (30.5M)	60.46
GEE62F-C		Natural	0.36" (.9) - .062" (1.6)	.131" (3.3)	.160" (4.1)	100' (30.5M)	51.81
GEE62F-C0		Black	0.36" (.9) - .062" (1.6)	.131" (3.3)	.160" (4.1)	100' (30.5M)	54.50
GEE99F-C	Continuous Polyethylene (Slotted Wall)	Natural	0.62" (1.6) - .099" (2.5)	.169" (4.3)	.186" (4.7)	100' (30.5M)	62.06
GEE99F-C0		Black	0.62" (1.6) - .099" (2.5)	.169" (4.3)	.186" (4.7)	100' (30.5M)	71.47
GEE144F-C		Natural	0.99" (2.5) - .144" (3.7)	.213" (5.4)	.222" (5.6)	100' (30.5M)	70.16
GEE144F-C0		Black	0.99" (2.5) - .144" (3.7)	.213" (5.4)	.222" (5.6)	100' (30.5M)	78.29
GES36F-C	Continuous Polyethylene (Slotted Wall)	Natural	.026" (.7) - .036" (.9)	.106" (2.7)	.117" (3.0)	100' (30.5M)	37.56
GES36F-C0		Black	.026" (.7) - .036" (.9)	.106" (2.7)	.117" (3.0)	100' (30.5M)	41.76
GES62F-C		Natural	0.36" (.9) - .062" (1.6)	.131" (3.3)	.160" (4.1)	100' (30.5M)	38.61
GES62F-C0		Black	0.36" (.9) - .062" (1.6)	.131" (3.3)	.160" (4.1)	100' (30.5M)	42.84
GES99F-C	Continuous Polyethylene (Slotted Wall)	Natural	0.62" (1.6) - .099" (2.5)	.169" (4.3)	.186" (4.7)	100' (30.5M)	40.86
GES99F-C0		Black	0.62" (1.6) - .099" (2.5)	.169" (4.3)	.186" (4.7)	100' (30.5M)	49.60
GES144F-C		Natural	0.99" (2.5) - .144" (3.7)	.213" (5.4)	.222" (5.6)	100' (30.5M)	45.86
GES144F-C0		Black	0.99" (2.5) - .144" (3.7)	.213" (5.4)	.222" (5.6)	100' (30.5M)	55.70
GES189F-C	Continuous Polyethylene (Slotted Wall)	Natural	.144" (3.7) - .189" (4.8)	.297" (7.6)	.301" (7.7)	100' (30.5M)	50.71
GES189F-C0		Black	.144" (3.7) - .189" (4.8)	.297" (7.6)	.301" (7.7)	100' (30.5M)	57.06
GEE62F-A-C	Continuous Polyethylene With ADHESIVE (Slotted Wall)	Natural	.036" (.9) - .062" (1.6)	.131" (3.3)	.160" (4.1)	100' (30.5M)	63.82
GEE62F-A-C0		Black	.036" (.9) - .062" (1.6)	.131" (3.3)	.160" (4.1)	100' (30.5M)	63.82
GEE99F-A-C		Natural	0.62" (1.6) - .099" (2.5)	.169" (4.3)	.186" (4.7)	100' (30.5M)	64.42
GEE99F-A-C0	Continuous Polyethylene With ADHESIVE (Slotted Wall)	Black	0.62" (1.6) - .099" (2.5)	.169" (4.3)	.186" (4.7)	100' (30.5M)	70.55
GEE144F-A-C		Natural	0.99" (2.5) - .144" (3.7)	.213" (5.4)	.222" (5.6)	100' (30.5M)	72.77
GEE144F-A-C0		Black	0.99" (2.5) - .144" (3.7)	.213" (5.4)	.222" (5.6)	100' (30.5M)	79.74
GES62F-A-C	Continuous Polyethylene With ADHESIVE (Solid Wall)	Natural	.036" (.9) - .062" (1.6)	.131" (3.3)	.160" (4.1)	100' (30.5M)	38.98
GES62F-A-C0		Black	.036" (.9) - .062" (1.6)	.131" (3.3)	.160" (4.1)	100' (30.5M)	42.92
GES99F-A-C		Natural	0.62" (1.6) - .099" (2.5)	.169" (4.3)	.186" (4.7)	100' (30.5M)	44.78
GES99F-A-C0	Continuous Polyethylene With ADHESIVE (Solid Wall)	Black	0.62" (1.6) - .099" (2.5)	.169" (4.3)	.186" (4.7)	100' (30.5M)	49.90
GES144F-A-C0		Black	0.99" (2.5) - .144" (3.7)	.213" (5.4)	.222" (5.6)	100' (30.5M)	55.52
GEE36FR-C	UL V0 Flame Retardant Polyethylene (Slotted Wall)	Natural	.026" (.7) - .036" (.9)	.106" (2.7)	.117" (3.0)	100' (30.5M)	77.06
GEE62FR-C		Natural	.036" (.9) - .062" (1.6)	.131" (3.3)	.160" (4.1)	100' (30.5M)	77.05
GEE99FR-C		Natural	.062" (1.6) - .099" (2.5)	.169" (4.3)	.155" (3.9)	100' (30.5M)	89.32
GEE144FR-C	UL V0 Flame Retardant Polyethylene (Slotted Wall)	Natural	.099" (2.5) - .144" (3.7)	.213" (5.4)	.232" (5.9)	100' (30.5M)	100.81
GES36FR-C		Natural	.026" (.7) - .036" (.9)	.106" (2.7)	.117" (3.0)	100' (30.5M)	53.42
GES62FR-C	UL V0 Flame Retardant Polyethylene (Solid Wall)	Natural	.036" (.9) - .062" (1.6)	.131" (3.3)	.160" (4.1)	100' (30.5M)	61.15
GES99FR-C		Natural	.062" (1.6) - .099" (2.5)	.169" (4.3)	.155" (3.9)	100' (30.5M)	67.62
GES144FR-C		Natural	.099" (2.5) - .144" (3.7)	.213" (5.4)	.232" (5.9)	100' (30.5M)	68.84
GE52-C	Military Standard MS21266 12.75 Nylon Strips **	Natural	.015" (.4) - .052" (1.3)	.150" (3.8)	.155" (3.9)	100' (30.5M)	134.77
GE52-C69†		Natural	.015" (.4) - .052" (1.3)	.150" (3.8)	.155" (3.9)	100' (30.5M)	213.98
GE85-C		Natural	.052" (1.3) - .085" (2.2)	.175" (4.5)	.155" (3.9)	100' (30.5M)	155.26
GE85-C69†		Natural	.052" (1.3) - .085" (2.2)	.175" (4.5)	.155" (3.9)	100' (30.5M)	246.64
GE128-C	Military Standard MS21266 12.75 Nylon Strips **	Natural	0.085" (2.2) - .128" (3.3)	.220" (5.6)	.155" (3.9)	100' (30.5M)	170.76
GE128-C69†		Natural	0.085" (2.2) - .128" (3.3)	.220" (5.6)	.155" (3.9)	100' (30.5M)	271.21
GE192-L	(-69 designates Flame Retardant) †	Natural	.128" (3.3) - .192" (4.9)	.325" (8.3)	.230" (5.8)	50' (15.2M)	231.14
GE192-L69†		Natural	.128" (3.3) - .192" (4.9)	.325" (8.3)	.230" (5.8)	50' (15.2M)	344.44
GE255-L		Natural	.192" (4.9) - .255" (6.5)	.385" (9.8)	.240" (6.1)	50' (15.2M)	336.47
GE318-L		Natural	.255" (6.5) - .318" (8.1)	.455" (11.3)	.255" (6.5)	50' (15.2M)	389.96
GE380-Q		Natural	.318" (8.1) - .380" (9.7)	.515" (13.1)	.255" (6.5)	25' (7.6M)	435.03
GE510-Q		Natural	.380" (9.7) - .510" (13.0)	.640" (16.3)	.255" (6.5)	25' (7.6M)	354.38
GEE47N-C	Continuous Nylon (Slotted Wall)	Natural	.020" (.5) - .047" (1.2)	.130" (3.3)	.140" (3.5)	100' (30.5M)	134.52
GEE55N-C		Natural	.047" (1.2) - .055" (1.4)	.133" (3.4)	.140" (3.5)	100' (30.5M)	131.84
GEE71N-C		Natural	.055" (1.4) - .071" (1.8)	.150" (3.8)	.140" (3.5)	100' (30.5M)	130.87
GEE98N-C		Natural	.071" (1.8) - .098" (2.5)	.180" (4.6)	.140" (3.5)	100' (30.5M)	131.50
GEE134N-C	Continuous Nylon (Slotted Wall)	Natural	.098" (2.5) - .134" (3.4)	.210" (5.3)	.140" (3.5)	100' (30.5M)	140.09

\*\*Military Standard Nylon Strips (GE Series), order the number of pieces required in multiples of Std. Pkg. Qty.  
†This material is not listed under Military Standard MS21266.



SLIT WALL




SOLID WALL

## PANDUIT CORRUGATED LOOM TUBING

PANDUIT Corrugated Loom Tubing is offered for applications where spiral wrap or braided expandable sleeving may be difficult to install or where they do not offer the amount of protection required. Available in Nylon or Polyethylene, this product features a lengthwise slit which makes it easy to install onto a bundle of wires or a pre-assembled harness assembly. **FEATURES:** Protects and reduces the risk of damage to wiring. Crush, impact and abrasion resistant. Slit wall design for easy of installation. Available in black or orange polyethylene and black heat stabilized nylon. Hold in place with push type cable ties, adhesive or push type mounts. **APPLICATIONS:** Bundle wires in control panels. Contain and organize loose and bundled wiring harnesses. Route wires in automotive, truck, trailer, bus, conversion van, emergency service and recreational vehicle applications. Protect wires in off road/mobile equipment. Use in mining equipment. Marine applications for protecting wires on boats and ships.

Continued on next page....

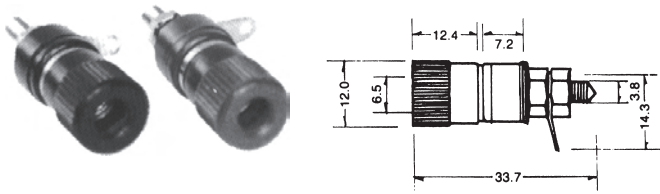

### LOW PROFILE BINDING POSTS

Cat. No.	Description	Net Price
31-431-0	Black	\$58
31-432-0	Red	.58

### LARGE BINDING POSTS

Cat. No.	Colour	Net Price
31-441-0	Black	\$2.03
31-442-0	Red	2.03
31-443-2	1 black, 1 red	4.33



### DUAL BINDING POSTS

Cat. No.	Net Price
31-440-0	\$3.60



### BANANA PLUGS

Cat. No.	Description	Net Price
31-461-0	Black	\$62
31-462-0	Red	.62



### 32MM ALLIGATOR CLIPS

Cat. No.	Net Price Per 100
33-400-0	\$13.08



### 51MM ALLIGATOR CLIPS

Cat. No.	Net Price Per 100
33-430-0	\$27.92



### 32MM INSULATED CLIPS

Cat. No.	Net Price Per 100
33-409-0	\$180.00



### 40MM INSULATED CLIPS

Cat. No.	Description	Net Price Per 100
33-411-0	Black	\$25.27
33-412-0	Red	25.27



### 51MM INSULATED CLIPS

Cat. No.	Description	Net Price Per 100
33-431-0	Black	\$42.08
33-432-0	Red	42.08



### SPIRAL WRAP

Natural colour polyethylene spiral wrap. 10 meter rolls.

Cat. No.	Dimensions	Net Price
34-410-10M	1/8" - 1/2" dia.	\$3.42
34-420-10M	1/4" - 2" dia.	4.67
34-440-10M	3/8" - 3" dia.	8.20
34-450-10M	1/2" - 4" dia.	8.92



### FLEXIBLE GROMMET

Natural colour polyethylene flexible grommet. 10 meter rolls.

Cat. No.	Dimensions	Net Price Per Roll
34-511-10M	1/32" Chassis Thickness	\$10.67
34-512-10M	1/16" Chassis Thickness	10.63
34-514-10M	3/32" Chassis Thickness	10.63
34-515-10M	1/8" Chassis Thickness	12.00



### FLEXIBLE CONDUIT

Black polypropylene flexible conduit. Split for easy wire insertion.

Cat. No.	Size	Net Price
34-521-300M	1/4" 300 meters	\$160.00
34-521-30M	1/4" 30 meters	18.17
34-521-10M	1/4" 10 meters	6.67
34-522-200M	3/8" 200 meters	133.33
34-522-30M	3/8" 30 meters	22.67
34-522-10M	3/8" 10 meters	8.08
34-523-200M	1/2" 200 meters	166.67
34-523-30M	1/2" 30 meters	28.00
34-523-10M	1/2" 10 meters	9.83
34-524-100M	3/4" 100 meters	100.00
34-524-30M	3/4" 30 meters	33.35
34-524-10M	3/4" 10 meters	11.67
34-525-100M	1" 100 meters	116.67
34-525-30M	1" 30 meters	38.95
34-525-10M	1" 10 meters	13.48