



## AMPROBE LM-80 DIGITAL LIGHT METER

**FEATURES:** Dual measurement capability in Foot-Candles or Lux. Measure from 0.01 to 20,000 Foot-Candles or Lux. Measurement ranges of 20/200/2000/20,000 Foot-Candles or Lux. Analog DC voltage output to operate with a Chart Recorder or Data Logger. Measuring rate of 2.0 times/sec. Data and peak hold features. Cosine corrected for the angular incidence of light (C.I.E. sensitivity adjustment to photo optic curve). CE approved. Supplied with carrying case and manual.


Cat. No.	Net Price
LM-80	\$239.95



## AMPROBE THWD-2 DIGITAL SLING PSYCHROMETER

**FEATURES:** Perfect for checking ambient air conditions in an HVAC environment. Temperature readings. Relative humidity measurement. Dew point and wet bulb readings. MAX/MIN with time stamp. Selectable °C and °F readout. Data hold function (99 readings from LCD display). Dual LCD display with bargraph indication. Auto power OFF. CE approved. **SPECIFICATIONS:** Range: Temperature: -4°F to 140°F (-20°C to 60°C). Humidity 1% RH to 99% RH. Resolution: 0.1°F (0.1°C) and 0.1% RH. Accuracy: Temperature: ±1.5°F (±0.8°C). Humidity: ±3% RH. Data memory capacity: manual recording: 99 data sets (direct reading from LCD display). Sampling rate: 2 times/sec. Operating conditions: 32°F to 140°F (0°C to 60°C) and 10 to 80% RH. Power source: Three AAA (1.5V) batteries. Battery life: Approx. 200 hours. Size: 6.7"L x 1.8"W x 0.8"H.

Cat. No.	Net Price
THWD-2	\$262.88

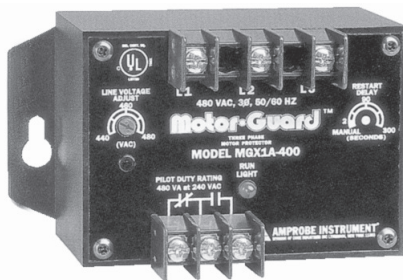

## AMPROBE MOTOR GUARD

**FEATURES:** Protect 3 phase motors from loss of power, low voltage, phase reversal, and voltage unbalance. Adjust voltage settings. Trip/reset delays avoid nuisance tripping. Prevents motor restart until fault is cleared. Works with 60 and 50 Hz motors. Low voltage (% of set point): trip 90%, reset 93%. Voltage unbalance: trip 6%, reset 4.5%. Safety: UL and ULC listed.

SPECIFICATIONS	MGX1A-200	MGX1A-400	MGX4A-400	MGX4A-600
AC voltage	208-240V	440-480V	440-480V	550-600V
Output contact rating	480 VA @ 240 VAC		470 VA @ 600 VAC	

Cat. No.	Net Price
MGX1A-200	\$243.64
MGX1A-400	243.64
MGX4A-400	407.91
MGX4A-600	481.79



## AMPROBE VP-600 AND VP-600B NON-CONTACT VOLTPROBES

Designed for safety and limited troubleshooting without the expense. Fits conveniently in a shirt pocket, tool belt, or pouch. **FEATURES:** Use non-contact method of voltage testing. Totally insulated, no exposed metal or conductive parts. Check for AC voltage without necessity of disconnecting the electrical system. Test for AC voltage cables, circuit breakers, wall sockets, junction boxes, fuses, etc. Cat III 600V. **SPECIFICATIONS:** AC voltage detection: 100-600V.

Cat. No.	Description	Net Price
VP-600	VoltProbe	\$22.00
VP-600B	VoltProbe with voltage buzzer	28.00