



THE CLEAR CHOICE



### KEYLOCK SWITCHES

5 disk tumbler lock with 2 position key removal and metal key actuator. Hardware included: nut, ring, 2 keys, and 2 screws. **SPECIFICATIONS:** Contact material: brass. Terminal material: brass. Terminal type: screw. Key changes available: 530, 531, 540, 541, 550, 553.

Cat. No.	AMPS 125 VAC	AMPS 28 VAC	Poles & Throws	Action	Indexing	Mounting Hole	Net Price
35-0196-0000	2.5*	2.1**	SPST	ON OFF	90°	.875"	\$12.43

NOTES: \*Rated @ 2.5 Amps @ 120VAC (480VA). \*\*Rated @ 2.1 Amps @ 46VDC (96VA).



35-0146-000  
DPDT



35-0155-0000  
SPDT


### HEAVY DUTY TOGGLE SWITCHES

Heavy duty toggle switches with bat handles and .500" mounting holes. Hardware included: nut, knurled nut, and a screw. **SPECIFICATIONS:** Initial contact resistance: 50m ohms (max.). Insulation resistance: 1000 megohms (min.). Dielectric strength: exceeds 1000V RMS. Contact material: brass-nickel plate. Terminal material: brass. Temperature rating: -30°C to -60°C. Electrical life: 6000 cycles (min.).

Cat. No.	Circuit Function	Poles & Throws	AMPS 125 VAC	AMPS 250 VAC	H.P. 125-250 VAC	Bushing Length	Net Price
<b>METAL ACTUATOR WITH SCREW TERMINALS</b>							
35-0110-0000	ON OFF ON	SPDT	20	10	3/4	0.470	\$4.89
35-0146-0000	ON ON	DPDT	20	10	3/4	0.470	7.00
35-0148-0000	ON OFF ON	DPDT	20	10	3/4	0.470	7.00
35-0150-0000	(ON) OFF (ON)	DPDT	20	10**	1-1/2	0.470	8.15

<b>BRASS ACTUATOR WITH SCREW TERMINALS</b>							
35-0155-0000	(ON) OFF (ON)	SPDT	20	10	3/4	0.325	5.62



NOTE: \*\*Rated @ 277VAC. ( ) = Momentary.

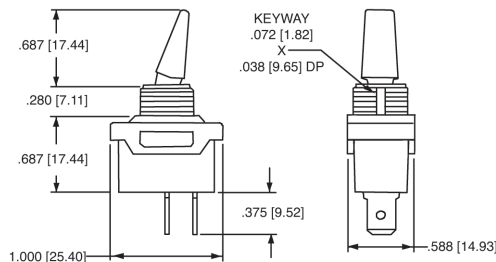

### MEDIUM DUTY TOGGLE SWITCHES

Medium duty toggle switch with .500" mounting hole. Hardware included: face nut and nickel nut. **SPECIFICATIONS:** Insulation resistance: 100 megohms (min.). Dielectric strength: 1000V RMS (min.). Contact material: copper. Terminal material: copper. Temperature rating: not to exceed 85°C. Electrical life: 10,000 cycles (min.). Mechanical life: 50,000 cycles (min.).

Cat. No.	Circuit Function	Poles & Throws	AMPS 125 VAC	AMPS 250 VAC	H.P. 125-250 VAC	Bushing Length	Net Price
<b>BLACK PLASTIC PADDLE ACTUATOR WITH Q.C. (.250") SOLDER TERMINALS</b>							
35-0180-0000	ON OFF	SPST	10	5	1/2	0.280	\$3.22



### BAT HANDLE TOGGLE SWITCH BOOT

Flexible moulded splashproof cover for bat handle toggle switches. Protects switching mechanism from dust and moisture. Accepts switch levers to 1/4" diameter and 3/4" length. Supplied with internal ring nut to fit 15/32" diameter bushing.

Cat. No.	Net Price
35-0060-0000	\$2.42



### SPECIALTY REED SWITCHES

**SPECIFICATIONS:** Contact material: gold plated iron alloy. Terminal material: tin plated iron alloy. Temperature rating: -40°C to +125°C. **NOTE:** 35-0752-0000 contains switch, mount, and coil form.

Cat. No.	Action	Amps 20VAC/DC	Amps 120VAC	Amps 80VDC	Net Price
<b>SPDT, LEADED SOLDER TERMINAL WITH MAGNET ACTUATOR</b>					
35-0752-0000	N.O. & N.C. Contacts	0.5*	0.08	0.10	\$5.45

NOTES: N.O. = Normally Open, N.C. = Normally Closed. \*10 watts max.



### SPECIALTY REED SWITCHES

**SPECIFICATIONS:** Contact material: gold plated iron alloy. Terminal material: plated steel. Mounted hole: 0.136" (1.970" centres).

Cat. No.	Action	Amps 20VAC/DC	Amps 120VAC	Amps 80VDC	Net Price
<b>SPDT, SCREW TERMINAL WITH MAGNET ACTUATOR</b>					
35-0756-0000	N.O. or N.C. without magnet	0.5*	0.08	0.10	\$8.56

NOTES: N.O. = Normally Open, N.C., Normally Closed. \*10 watts max.



### MERCURY TILT SWITCH

**SPECIFICATIONS:** Contact material: iron alloy/mercury. Terminal material: copper wire #26 AWG insulated. Terminal type: 5-1/2" (14cm) typical overall 7" typical flexible wire leads-stripped. Differential angle: .350 PVC insulation -80°. Tilt angle: 10° max, 8° make/break. Action: normally open or normally closed.

Cat. No.	Amps 30VAC	Amps 120VAC	Amps 240VAC	Amps 120VDC	Amps 240VDC	Amps 30VDC	Net Price
<b>SPST, MERCURY ACTUATOR</b>							
35-0763-0000	6	3	2	2	1	4	\$2.24

NOTES: N.O. = Normally Open, N.C. = Normally Closed. \*10 watts max.