



FYBEROID "FISH PAPER"

#560 thin insulated "Fish Paper". For numerous repair jobs around the shop where electrical insulation is required. **SPECIFICATIONS:** Size: 10" wide. Description: vulcanized cellulose fiber. Colour: blue-grey. Thickness: 0.010 inch \pm 10%. Uses: all electrical insulation. Tensile strength: MD 15,000 psi, (typical). CD 6,000 psi, (typical). Density: 1.1 gram per cubic centimeter min. Electrical strength: 300 volts per mil (typical). Bursting strength: (mullen) 270 psi, (typical). Tearing strength: MD 375 grams, (typical). CD 450 grams, (typical). Zinc chloride content: 0.05% max. UL 94 flame class: 94HB UL file #E55656. Meets mil. spec. MIL-1-695A type F. Rolled.

| Cat. No. | Net Price |
|--------------|-----------|
| 00-0560-0000 | \$4.16 |

HD-4018 HARDWARE KIT ASSORTMENT

Individually compartmented, for fast selection, in reusable, plastic boxes with hinged cover and positive clasp. All metal hardware is nickel-plated steel. Contains 115 fasteners. Binder hd. steel machine screws, hex nuts, and hex hd. sheet metal screws.

| Cat. No. | Description of Kit Contents | | Net Price |
|----------|-----------------------------|------------------------|-----------|
| | Cat. No. | Fits Chassis Hole Size | |
| HD-4018 | F-021 | 4-40 x 1/2" screw | \$10.66 |
| | F-503 | 6-32 x 1/4" screw | |
| | F-015 | 6-32 x 3/4" screw | |
| | F-025 | 8-32 x 1/2" screw | |
| | F-557 | 4-40 x 1/4" nut | |
| | F-561 | 8-32 x 1/4" nut | |
| | F-526 | #6 x 1/2" screw | |
| | F-559 | 6-32 x 1/4" nut | |

HD-4209 VINYL GROMMET HARDWARE KIT ASSORTMENT

Contains 185 pieces of the six most popular types of vinyl grommets in a reusable plastic box.

| Cat. No. | Description of Kit Contents | | | Net Price |
|----------|-----------------------------|------------------------|-----------------------|-----------|
| | Cat. No. | Fits Chassis Hole Size | Wire Hole Size (I.D.) | |
| HD-4209 | G-401 | 1/4" | 1/8" | \$17.58 |
| | G-402 | 5/16" | 3/16" | |
| | G-403 | 3/8" | 1/4" | |
| | G-404 | 7/16" | 5/16" | |
| | G-405 | 1/2" | 3/8" | |
| | G-406 | 5/8" | 1/2" | |



MACHINE SCREW ASSORTMENT

| Contents | Qty. in Pkg. |
|--------------------------------------|--------------|
| ROUND HEAD MACHINE SCREWS | |
| #4-40 x 1/2" | 100 |
| #6-32 x 1/4" | 100 |
| #6-32 x 1/2" | 75 |
| #6-32 x 3/4" | 50 |
| #8-32 x 1/2" | 50 |
| HEX NUTS—STEEL, NICKEL PLATED | |
| #4-40 x 1/4" | 100 |
| #6-32 x 1/4" | 100 |
| #8-32 x 1/4" | 100 |


| Cat. No. | Net Price |
|----------|-----------|
| 11-520 | \$25.57 |



HEAT SHRINKABLE TUBING ASSORTMENT

Shrink to half its original size when heated. Use it for insulating terminals, connectors, tool handles and wire splices. Use heat gun, oven, barrel of soldering iron or just a match. Assorted size and colours. Package of 7 6" lengths.

| Cat. No. | Net Price |
|--------------|-----------|
| H3-0462-0000 | \$2.42 |

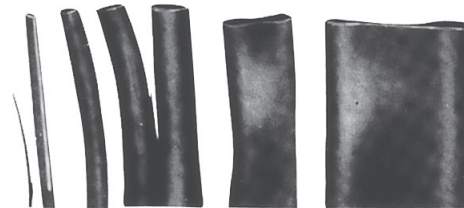

FLEXIBLE HEAT SHRINKABLE PVC TUBING

Fungus-resistant and non-corrosive PVC tubing. Application of heat (250°F) shrinks tubing to 50% of original diameter. Recommended for tightly sealing connectors, weather proofing repaired sections in insulated wire or cable, etc. Meets UL requirements, ASTM D-922, Mil. spec. MIL-1-631 Grade C and MIL-1-23053 Grade 5b.

SPECIFICATIONS:
Recovery Temperature: 250°F
Tensile Strength: 1800 PSI min.
Flammability: less than 15 seconds (ASTM D-876)
Dielectric Strength: 800V/MIL
Dielectric Constant: 7.0 1 kHz
Material: PVC, Class A (105°C) shrinkdown
 Packaged in 6" lengths

| Cat. No. | Description | Pieces Per Bag | Net Price |
|--------------|---|----------------|-----------|
| 12-1080-0000 | Assorted Black N.S.N. 5970-01-051-4706 | 23 | \$5.22 |



FLEXIBLE HEAT SHRINKABLE PVC TUBING

Fungus-resistant and non-corrosive PVC tubing. Application of heat (250°F) shrinks tubing to 50% of original diameter. Recommended for tightly sealing connectors, weather proofing repaired sections in insulated wire or cable, etc. Meets UL requirements, ASTM D-922, Mil. spec. MIL-1-631 Grade C and MIL-1-23053 Grade 5b. **SPECIFICATIONS:** Recovery temperature: 250°F. Tensile strength: 1800 PSI min. Flammability: less than 15 seconds (ASTM D-876). Dielectric strength: 800V/MIL. Dielectric constant: 7.0 1 kHz. Material: PVC, Class A (105°C) shrinkdown, packaged in 6" lengths.

| Cat. No. | Description | Pieces Per Bag | Net Price |
|--------------|---|----------------|-----------|
| 12-1082-0000 | Assorted Clear N.S.N. 5970-01-051-4708 | 19 | \$5.22 |