


BOGEN®



TPU35B, TPU60B
TPU100B, TPU250

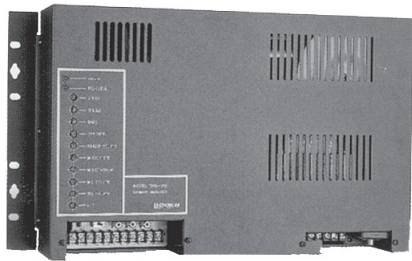

TPU15A


Model	Output Power (Watts)	Inputs			Adjustable Mute Threshold	Automatic Level Control	Bass/Treble Controls	Peak Level LED	Adjustable Mute Level	Fade Back From Mute	Aphex Aural Exciter	Night Ringer		Outputs					
		Telephone	Music	Microphone								90V Activation	Contact Closure	70V	25V	25 VCT	8 Ohms	16 Ohms	
TPU250	250	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
TPU100B	100	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
TPU60B	60	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
TPU35B	35	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
TPU15A	15	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●

* Treble Cut Only


BOGEN TELEPHONE PAGING AMPLIFIERS

Bogen's TPU-Series of amplifiers are the ideal choice within the telephone paging industry. With five models to choose from, ranging in power from 15 watts to 250 watts, each model provides signal-activated, automatic muting of background music during a telephone page, and gradual return of music following a page. **FEATURES:** 15, 35, 60, 100 and 250 watt models specially designed for telephone paging systems. 3 inputs on TPU250 and TPU-B models: 1 TEL, 1 MIC (Lo-Z), 1 AUX (Hi-Z). 2 inputs on TPU15A: 1 TEL, 1 AUX (Hi-Z). Sensitivity: 0.3 mV, MIC; -20 dBm, Tel; 85 mV, Aux. 600-ohm balanced TEL input for direct connection to page ports and adapters. TEL input has Automatic Level Control (ALC) for constant page announcement level. Separate MIC input for a low-impedance push-to-talk microphone (TBU-B models only). Music input—mutable by external contact closure (TBU-B models only) or activity on TEL input. Separate volume controls for mic, paging, background music, and night ringer. Built-in night ringer can be activated from 90V ring signal (TPU-B models only) or external contact closure. 25V and 70V constant voltage outputs, balanced and unbalanced; also 8-ohm on TPU15A. Wall-mount design provides minimum protrusion from backboard. TPU-B models may be rack-mounted using RPK82 rack mounting kit (sold separately). TPU250 designed to rack mount directly, no kit necessary. Easily accessible, recessed front-panel controls (TPU-B models only) for setting volume, muting, music, etc. RCA jacks provided to allow amplifier bridging to double the number of amplifier inputs and outputs (TPU-B models only); a TPU250 can only be bridged with one other TPU250. Thermal and electronic overload protection (TPU-B models only), resettable circuit breaker (except TPU250), Slow Blow fuse on TPU250.

Cat. No.	Net Price
TPU250	\$885.00
TPU100B	516.00
TPU60B	470.00
TPU35B	443.00
TPU15A	250.00



GSRPK
RACK PANEL
MOUNTING KIT

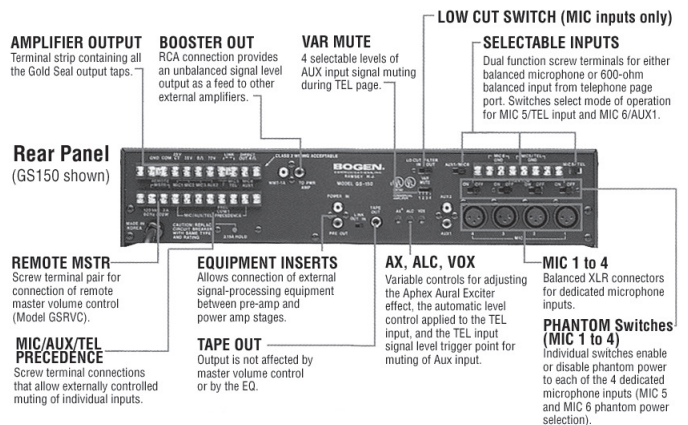

BOGEN PUBLIC ADDRESS AMPLIFIERS GOLD SEAL SERIES

This amplifier series was designed with the sound contractor in mind, offering professional and installation convenience. Each Gold Seal amplifier offers a unique combination of built-in features, ultra-high reliability, and extensive input flexibility and input options. **FEATURES:** 35, 60, 100, 150 and 250 watt models. 7 inputs: 4 MIC (Lo-Z), 1 AUX (Hi-Z), 1 MIC/TEL, 1 MIC/AUX, 4-ohm, 8-ohm, 25V, 25VCT, and 70V outputs. Dual-function, 10-band graphic equalizer (acoustic EQ/feedback control). True loudness contour function. Aphex® Aural Exciter for improved intelligibility. Automatic lever control. Switchable phantom power supply. Variable Aux input muting. Remote master volume control capability. Input muting via contact on all inputs. Voice-activated Aux muting on Tel input. Aux fade back after Tel page. Pre-amp out/power amp in connections. Booster amp output connection. Tape output connection. Low-cut filter for Mic channels. Thermal and overload protection. 3-speed cooling fan (GS250 only). Rack-mountable with accessory mounting kit (2 rack spaces).

Cat. No.	Net Price
GS35	\$658.49
GS60	718.82
GS100	731.60
GS150	841.22
GS250	1074.53
GSRPK	48.06