

PROFESSIONAL PHONE PLUGS



The Neutrik 1/4" phone plug features a shell from die-cast zinc, a one piece, completely machined, sleeve as well as the patented Neutrik chuck-type strain relief with maximal cable protection. It accepts cables with 2.8-7mm dia. They are available in 2- or 3-pole versions, in heavy duty right-angle version and also in a "B-gauge" (BP0316 "Longframe") configuration. The new 4.4mm "Bantam" miniature plug features a simple and fast assembling technique without the use of screws, and offers an excellent cable strain relief for cables from 3-5mm dia. The design of the "Longframe" as well as the "Bantam" allows durable hard plating of the contact surfaces and guarantees a drastic increase in durability and corrosion resistance.

Cat. No.	Finish	Net Price Each	
		1-49	50-Up
1/4" 2-POLES			
NP2C	Nickel	\$5.36	\$2.68
NP2C-BAG	Black	5.98	2.99
NP2C-SP	Nickel	5.31	2.66
1/4" 2-POLES, INTERNAL LOW TO HIGH IMPEDANCE TRANSFORMER			
NP2C-T10AA	Nickel	52.19	26.09
1/4" 2-POLES, RIGHT ANGLE			
NP2RCS	Nickel	6.61	3.30
1/4" 3-POLES STEREO			
NP3C	Nickel	8.38	4.19
NP3C-BAG	Black	8.68	4.34
1/4" 3-POLES, RIGHT ANGLE STEREO			
NP3RCS	Nickel	10.95	5.48
1/4" 3-POLES, LONG FRAME			
NP3TB-B	Black	10.22	5.11
NP3TB-R	Red	10.17	5.09
4.4MM 3-POLES, BANTAM			
NP3TT-1-B	Black	10.86	5.43
NP3TT-1-R	Red	10.84	5.42
4.4MM 3-POLES, BANTAM, STANDARD RG-58 CRIMP TOOL REQUIRED			
NP3TT-P-B	Black	8.73	4.36
NP3TT-P-R	Red	8.73	4.36
NP3TT-2	Dual Bantam Plug	17.41	8.70
3.5MM 3-POLES, TINY PLUG			
NTP3RC	Nickel	3.86	3.86
NTP3RC-B	Black	5.02	5.02


CRIMPING TOOL

Hexagonal crimping tool for NP3TT-1 connectors.

Cat. No.	Net Price
HX-TT	\$879.03

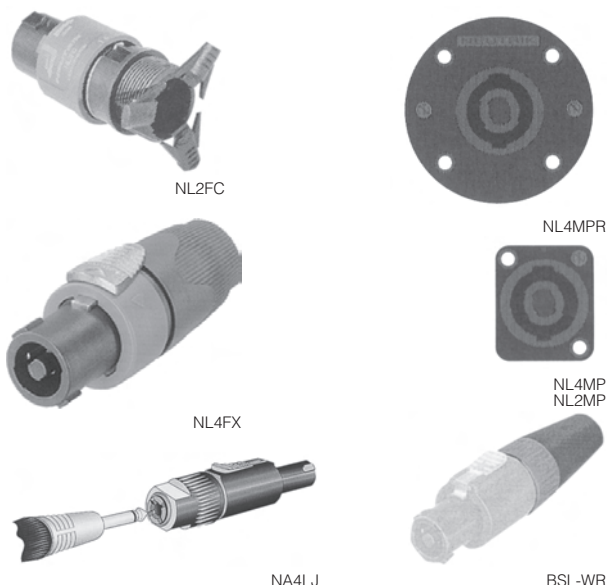

NL4MP-UC




NL4MP-ST

NEUTRIK "SPEAKON®" LOUDSPEAKER/AMPLIFIER CONNECTORS

Solderless, with easy assembly. Field serviceable. 4 contacts to accept wires up to 6mm (AWG 10). Current rating 30 amps RMS each contact. Voltage rating 250 Volts AC.

Cat. No.	Description	Net Price Each	
		1-49	50-Up
NL2FC	Twist Lock Speaker Cable Connector, 2 Pole	\$6.11	\$3.06
NL4FX	Twist Lock Speaker Cable Connector, 4 Pole	8.88	4.44
NL8FC	Twist Lock Speaker Cable Connector, 8 Pole	21.75	10.88
NL2MP	Chassis Connector, 2 Pole	4.10	2.74
NL4MP	Chassis Connector, 4 Pole	3.56	1.78
NL4MP-UC	40 Amp Version, Now Can Operate High Power Loudspeakers and Amplifiers Carrying More Than 1000 Watts	6.57	3.28
NL4MP-ST	Receptacle With Screw Termination. Does Not Need Special Tools For Assembly Thus it is Dedicated For Field Applications	7.24	3.62
NL4MPR	Speaker Cabinet Connector With Large Round Flange, Air Tight, 4 Pole	5.31	2.66
NL8MPR	Same as NL4MPR, Only 8 Pole	15.06	7.53
NL4MMX	In-line Coupler For Linking Cable 4 Pole	9.22	4.61
NL8MM	In-line Coupler For Linking Cable 8 Pole	32.79	16.39
NA4LJ	Speakon to 1/4" Adapter	14.04	7.02
BSL-WR	Water Resistant Gland Particularly Utilized For Outdoor Applications or Wet Environment. In Addition The Gland is Also Suitable For The Powercon Series	2.81	1.40

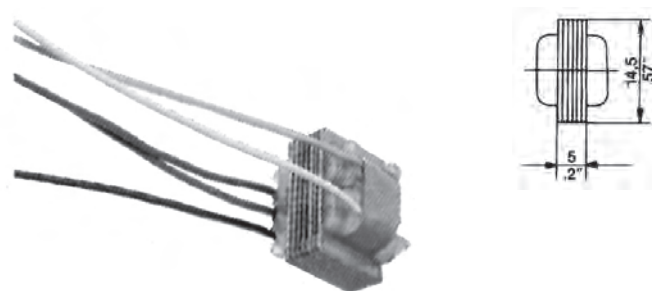

NEUTRIK TRANSFORMERS

Top quality audio transformers for multiple applications.

Cat. No.	Colour Code	Turns Ratio	Frequency Response at 200 Ohms Source	Max. Input Level 1% THD/50 Hz.	Net Price
NTE-1	Red	1:1	30-20K ±0.5 dB	600 mV	\$14.75
NTE-4	Yellow	1:4	30-20K ±1.0 dB	500 mV	17.30
NTE-10/3	Orange	1:3:10	30-20K ±1.0 dB	450 mV	13.36
NTM-1		1:1	15-25K ±0.5 dB	1.5V	81.78
NTM-4		1:4	15-25K ±0.5 dB	1.5V	84.67
NTL-1		1:1	Depending on Circuit	to +24 dBu (Line)	94.63