


## MOUNTING BRACKETS

### UNIVERSAL MOUNTING BRACKETS

Cat. No.	Dimensions (Inches)							G Dia.	H Dia.	Net Price Each
	A	B	C	D	E	F				
<b>BRASS, NICKEL PLATE</b>										
633	.375	.375	.281	.218	.218	.032	.140	.140		<b>\$.12</b>
613	.390	.453	.375	.234	.299	.032	.128	.147		<b>\$.27</b>
<b>BRASS, TIN PLATE</b>										
615	.420	.343	.281	.281	.203	.032	.128	.144		<b>\$.15</b>
618	.628	.628	.375	.378	.378	.050	.169	.169		<b>\$.37</b>
<b>STEEL, NICKEL PLATE</b>										
4335	.562	.562	.500	.412	.411	.062	.120	.120		<b>\$.30</b>
4336	.562	.562	.500	.412	.412	.062	.144	.144		<b>\$.30</b>
4326	1.103	.487	.312	.816	.332	.050	.140	.140		<b>\$.42</b>
<b>STEEL, TIN PLATE</b>										
619	.687	.687	.375	.500	.500	.032	.144	.144		<b>\$.18</b>
620	1.156	.656	.375	.906	.420	.032	.169	.169		<b>\$.32</b>

### THREADED MOUNTING BRACKETS


Cat. No.	Dimensions (Inches)							G Dia.	H Dia.	Net Price Each
	A	B	C	D	E	F				
<b>BRASS, NICKEL PLATE</b>										
634	.375	.375	.281	.218	.218	.032	6-32	.140		<b>\$.39</b>
<b>BRASS, TIN PLATE</b>										
616	.453	.312	.250	.265	.187	.047	4-40	.136		<b>\$.38</b>
614	.420	.343	.312	.250	.197	.032	6-32	.144		<b>\$.19</b>
611	.375	.422	.312	.234	.250	.037	8-32	.135		<b>\$.41</b>
<b>STEEL, ZINC PLATE</b>										
612	.343	.375	.250	.203	.250	.062	4-40	.130		<b>\$.17</b>
621	.343	.375	.250	.203	.250	.062	4-40	4.40		<b>\$.21</b>
<b>STEEL, TIN PLATE</b>										
617	.578	.500	.500	.328	.299	.062	6-32	.165		<b>\$.37</b>
<b>STEEL, NICKEL PLATE</b>										
4334	.562	.562	.500	.412	.412	.062	6-32	6-32		<b>\$.85</b>

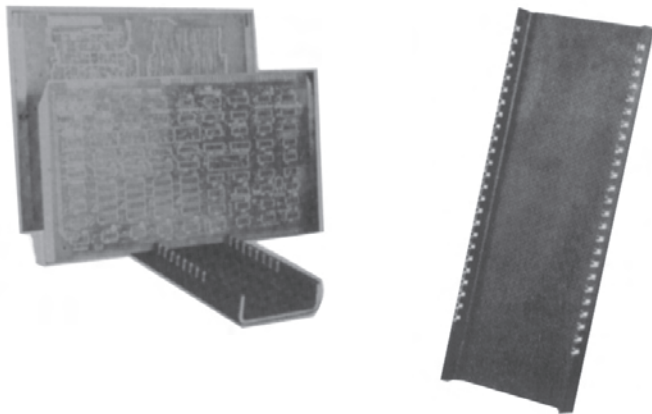

## PRINTED CIRCUIT BOARD RACKS

Minimizes PCB handling and wear between MFG. Stages. Durable 1/8" thick fiberglass. Holds up to 25 boards in 3/8" deep x 1/8" wide slots 15 1/2" in length. Available in standard 3 1/2" width Model PC-R250-35 and for wider boards in 5 1/2" width Model PC-R250-55.

Cat. No.	Width	Net Price
PC-R250-35	3 1/2"	<b>\$21.03</b>
PC-R250-55	5 1/2"	<b>26.83</b>



## ROUND INSTRUMENTATION HANDLES

MATERIALS: Brass: Nickel Plate. Aluminum: Black Anodize.

Cat. No.	Dimensions						Net Price
	A	B	E	D	R	C	
<b>BRASS</b>							
7140	1.250	1.000	4-40	.375	.156	.156	<b>\$4.23</b>
7141	2.000	1.000	4-40	.375	.156	1.56	<b>4.35</b>
7142	3.000	1.000	4-40	.375	.156	.156	<b>3.66</b>
9100	1.250	.625	4-40	.156	.187	.187	<b>4.23</b>
9101	1.500	.625	4-40	.156	.187	.187	<b>4.23</b>
9104	1.500	.750	4-40	.250	.187	.187	<b>4.69</b>
9102	1.750	.650	4-40	.156	.187	.187	<b>4.14</b>
9105	1.750	.750	4-40	.250	.187	.187	<b>4.35</b>
9103	2.000	.625	4-40	.156	.187	.187	<b>4.35</b>
9106	1.250	1.000	6-32	.250	.187	.187	<b>4.69</b>
9107	1.500	1.000	6-32	.250	.187	1.87	<b>5.09</b>
9108	2.000	1.000	6-32	.250	.187	.187	<b>4.81</b>
9109	3.000	1.000	6-32	.250	.187	.187	<b>4.93</b>
7143	3.000	1.500	8-32	.562	.250	.250	<b>5.09</b>
485	3.000	1.750	8-32	.562	.250	.250	<b>5.09</b>
480	3.500	1.500	8-32	.562	.250	.250	<b>5.14</b>
7144	4.000	2.500	8-32	.562	.250	.250	<b>5.32</b>
486	4.000	1.750	8-32	.562	.250	.250	<b>5.32</b>
481	4.500	1.500	8-32	.562	.250	.250	<b>5.45</b>
487	4.500	1.750	8-32	.562	.250	.250	<b>5.45</b>
482	5.000	1.500	8-32	.562	.250	.250	<b>5.54</b>
488	5.000	1.750	8-32	.562	.250	.250	<b>5.54</b>
483	5.500	1.500	8-32	.562	.250	.250	<b>5.66</b>
484	6.000	1.500	8-32	.562	.250	.250	<b>5.76</b>
489	6.000	1.750	8-32	.562	.250	.250	<b>5.76</b>
7145	3.000	1.500	10-32	.562	.312	.312	<b>5.66</b>
7146	4.000	1.500	10-32	.562	.312	.312	<b>5.94</b>
493	4.000	1.750	10-32	.562	.312	.312	<b>5.94</b>
490	4.500	1.500	10-32	.562	.312	.312	<b>6.12</b>
494	4.500	1.750	10-32	.562	.312	.312	<b>6.12</b>
7147	4.562	1.500	10-32	.562	.312	.312	<b>6.12</b>
491	5.000	1.500	10-32	.562	.312	.312	<b>6.24</b>
495	5.000	1.750	10-32	.562	.312	.312	<b>6.24</b>
492	5.500	1.500	10-32	.562	.312	.312	<b>6.34</b>
7148	6.000	1.500	10-32	.562	.312	.312	<b>7.04</b>
496	6.000	1.750	10-32	.562	.312	.312	<b>6.80</b>
7149	6.437	1.750	10-32	.562	.312	.312	<b>7.01</b>
7150	4.000	1.375	10-32	.375	.375	.375	<b>6.59</b>
7151	6.000	1.375	10-32	.375	.375	.375	<b>6.80</b>
<b>ALUMINUM</b>							
7170	1.250	1.000	4-40	.375	.156	.156	<b>3.39</b>
7171	2.000	1.000	4-40	.375	.156	1.56	<b>3.78</b>
7172	3.000	1.000	4-40	.375	.156	.156	<b>3.83</b>
9110	1.250	.625	4-40	.156	.187	.187	<b>3.39</b>
9111	1.500	.625	4-40	.156	.187	.187	<b>3.39</b>
9114	1.500	.750	4-40	.250	.187	.187	<b>3.78</b>
9112	1.750	.650	4-40	.156	.187	.187	<b>3.52</b>
9115	1.750	.750	4-40	.250	.187	.187	<b>3.78</b>
9113	2.000	.625	4-40	.156	.187	.187	<b>3.78</b>
9116	1.250	1.000	6-32	.250	.187	.187	<b>3.78</b>
9117	1.500	1.000	6-32	.250	.187	1.87	<b>4.09</b>
9118	2.000	1.000	6-32	.250	.187	.187	<b>4.09</b>
9119	3.000	1.000	6-32	.250	.187	.187	<b>4.19</b>
7173	3.000	1.500	8-32	.562	.250	.250	<b>4.35</b>
515	3.000	1.750	8-32	.562	.250	.250	<b>4.35</b>
510	3.500	1.500	8-32	.562	.250	.250	<b>4.46</b>
7174	4.000	2.500	8-32	.562	.250	.250	<b>4.72</b>
516	4.000	1.750	8-32	.562	.250	.250	<b>4.72</b>
511	4.500	1.500	8-32	.562	.250	.250	<b>4.85</b>
517	4.500	1.750	8-32	.562	.250	.250	<b>4.85</b>

Continued on next page....