

# ECG<sup>®</sup>

# WIRELESS INSPECTION CAMERAS

The ECG Wireless Inspection Cameras allow for easy visual inspections in hard-to-reach areas, even in total darkness or underwater, with super bright LEDs! Lightweight, handheld design helps you easily find, diagnose, and solve problems.



## Removable Color LCD Monitor

ECG Wireless Inspection Cameras stand apart from the rest... literally... because they feature a removable color LCD monitor that displays crystal clear video images for accurate visual inspection. This unique wireless feature allows you to put the camera where you need it... and the monitor where you can see it... up to 30 ft. away – affording you a whole new level of convenience.



## WIC-1™ : INSPECTION CAMERA

- 2.4" removable color LCD monitor
- Waterproof camera and shaft (IP67)
- Video out for recording
- Includes mirror, hook, and magnet tips
- Includes magnetic monitor base
- One year warranty
- FCC compliant



### WIC-1™ SPECIFICATIONS

CAMERA		MONITOR	
Imaging Sensor:	CMOS	Screen Type:	2.36" LCD
Total Pixels:	712 x 486	Effective Pixels:	480 x 240
Horizontal View Angle:	50°	Video System:	NTSC
Transmission Frequency:	2468 MHz	Transmission Frequency:	2468 MHz
Modulation Type:	FM	Exterior Supply Voltage:	8V - 36V DC
Bandwidth:	18 MHz	Consumption Current (Max.):	450 mA
Power Supply:	4 x AA Batteries	Video Output Level:	0.9 - 1.3V P-P @ 75 ohm
Weight (With Shaft):	1.17 lbs.	Dimensions (W x D x H) (inches):	3.94 x 2.76 x 1.18
Operating Temperature:	14°F ~ 122°F	Weight:	0.31 lbs.
Operating Humidity:	15 ~ 85% RH	Operating Temperature:	14°F ~ 122°F
Diameter (mm/inches)	15.9 / 0.63	Operating Humidity:	15 ~ 85% RH
		Power Supply:	Rechargeable Lithium-ion Battery

## WIC-100™ : DELUXE INSPECTION CAMERA

- 3.5" removable color LCD monitor
- Waterproof camera and shaft (IP67)
- Records to removable 2GB SD card (included)
- Includes mirror, hook, and magnet tips
- One year warranty
- FCC compliant
- Includes magnetic monitor base
- Smaller 9mm camera head




### WIC-100™ SPECIFICATIONS

CAMERA		MONITOR	
Imaging Sensor:	CMOS	Screen Type:	3.5" TFT-LCD
Total Pixels:	640 x 480	Effective Pixels:	320 (RGB) x 240
Horizontal View Angle:	45°	Video System:	PAL/NTSC
Transmission Frequency:	2468 MHz	Transmission Frequency:	2414, 2432, 2450, 2468 MHz
Modulation Type:	FM	Exterior Supply Voltage:	5 VDC
Bandwidth:	18 MHz	Consumption Current (Max.):	500 mA
Power Supply:	4 x AA Batteries	Video Output Level:	0.9 - 1.3V P-P @ 75 ohm
Weight (With Shaft):	1.17 lbs.	Dimensions (W x D x H) (inches):	4 x 2.7 x 1
Operating Temperature:	14°F ~ 122°F	Weight:	0.31 lbs.
Operating Humidity:	15 ~ 85% RH	Operating Temperature:	14°F ~ 122°F
Diameter (mm/inches)	9/0.35	Operating Humidity:	15 ~ 85% RH
		Power Supply:	Rechargeable Lithium-ion Battery




# ECG<sup>®</sup> WIRELESS INSPECTION CAMERA ACCESSORIES

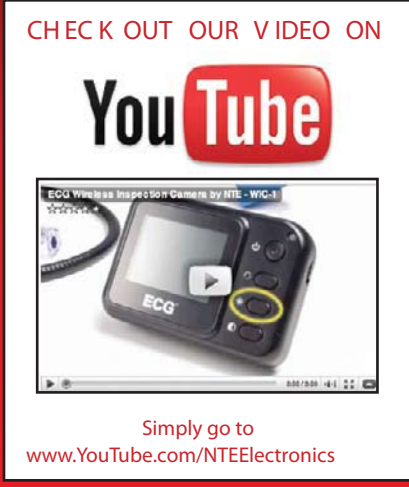

**NTE<sup>®</sup>**  
ELECTRONICS, INC.

# ECG<sup>®</sup> WIRELESS INSPECTION CAMERAS

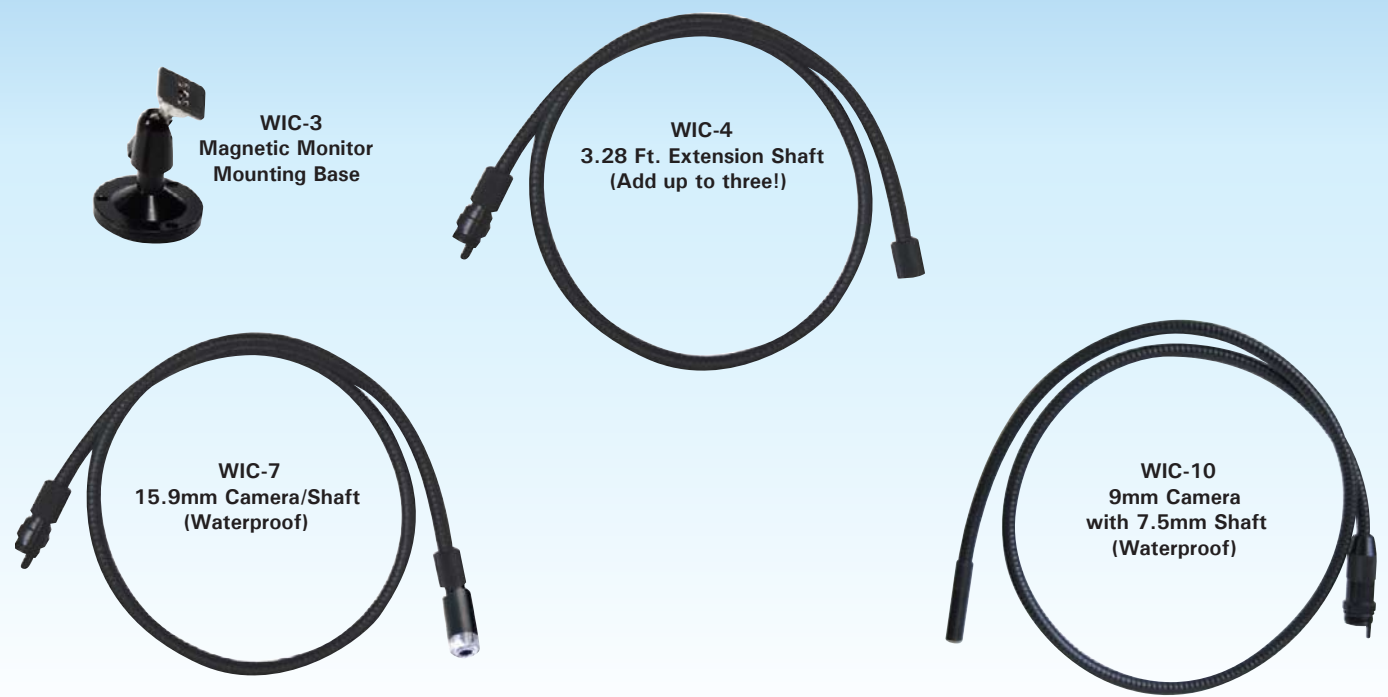

For other accessories  
call 1.800.56.SONIC



- Applications:**
- HVAC Inspection
  - Automotive Inspection
  - Cable Routing
  - Electrical
  - General Contracting
  - Home Theater Installation
  - Plumbing Inspection
  - Much more!

**NTE<sup>®</sup>**  
ELECTRONICS, INC.

Distributed by:

**electro sonic**



EL75-02 01/10

