

POWER RECEPTACLES FEMALE XD/P™ CONNECTORS END MOUNT AND CENTER MOUNT



LR49571



E60980

MATERIALS AND FINISH

POWER RECEPTACLE BODY: Copper alloy,
30 microinches gold plating overall

POWER RECEPTACLE SPRING: Copper alloy,
30 microinches gold plating in contact zone

LOCKWASHER: Copper alloy, tin plating


NUT: Copper alloy, tin plating

ELECTRICAL PROPERTIES

CURRENT RATING: 15 Amps

ENVIRONMENTAL PROPERTIES

TEMPERATURE RATING: -55°C TO 125°C

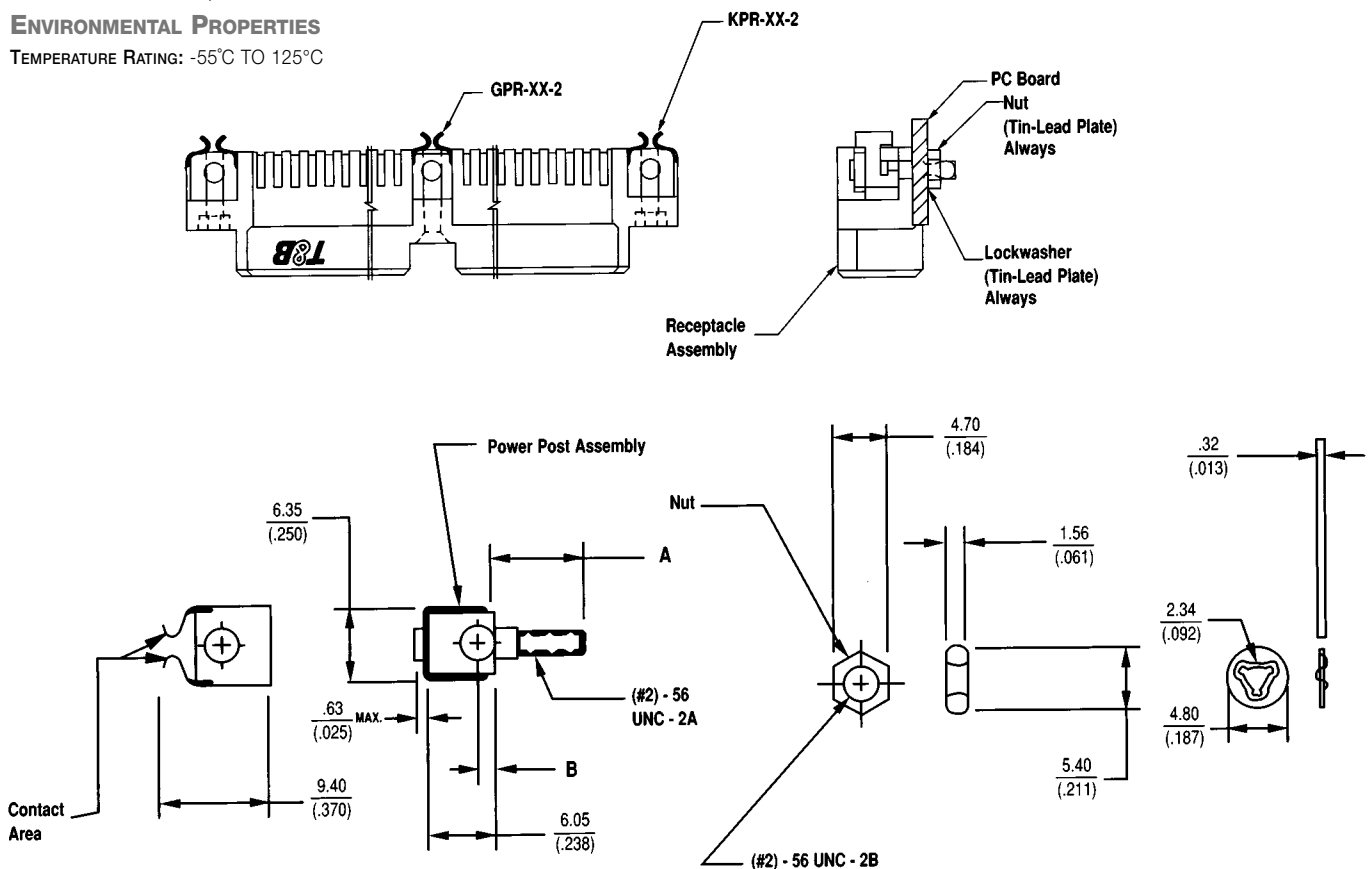

Ordering Information

CATALOG NO.	A	B	PCB THICKNESS RANGE	APPLICATION
KPR-01-2	10.80 (.425)	1.39 (.055)	2.22 (.088) – 4.90 (.193)	END MOUNT
KPR-02-2	8.26 (.325)	1.39 (.055)	1.46 (.058) – 2.21 (.087)	
KPR-03-2	7.25 (.285)	1.39 (.055)	1.45 (.057) MAX	
GPR-01-2	10.80 (.425)	3.40 (.134)	2.22 (.088) – 4.90 (.193)	CENTER MOUNT
GPR-02-2	8.26 (.325)	3.40 (.134)	1.46 (.058) – 2.21 (.087)	
GPR-03-2	7.25 (.285)	3.40 (.134)	1.45 (.057) MAX	