1575.42MHZ; 20.0 x 20.0 x 4.0mm GPS Patch Antenna

APAE1575R2040ABDD2-T

RoHS/ RoHS II compliant



MSL level: Not Applicable

FEATURES:

- · High Gain
- Compact Size and Low Profile
- Pin type
- Customization Available
- RoHS Compliance

TYPICAL APPLICATIONS:


Automotive navigation, Marine buoys, Surveying equipment, Cell phone, Laptop, Healthcare and medical monitoring devices, PND, PDA

> STANDARD SPECIFICATIONS:

Parameters	Min.	Typ.	Max.	Units	Note
Center Frequency @ -10dB bandwidth ^(*)	1582.0±2.5			MHz	(with tape on 22×22mm ground plane)
-10dB Bandwidth	7.0			MHz	
VSWR at Center Frequency			1.5		
Impedance	50		Ω		
Polarization Model	RHCP				(Right Hand Circular Polarization)
Frequency Temperature Coefficient			20	ppm/°C	

^(*) Application environment, including size of ground plane will affect stated performance. Fine tuning might be required when installed on customer's PCB.

> TEST CONDITIONS & TEST SETUP:

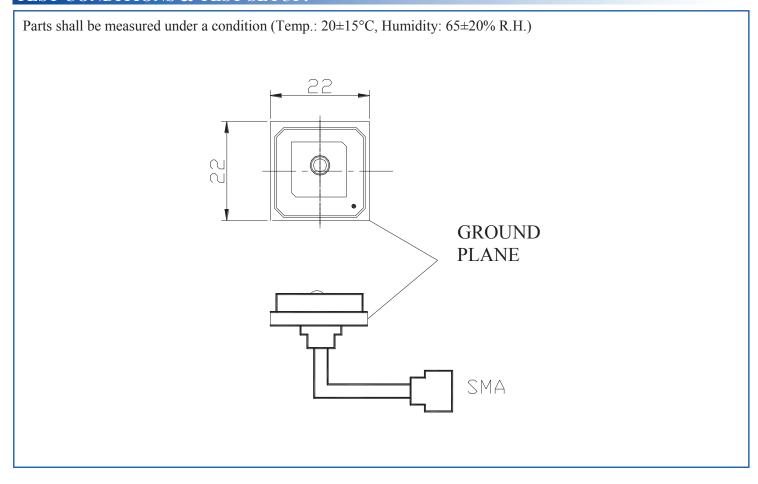





1575.42MHZ; 20.0 x 20.0 x 4.0mm GPS Patch Antenna

APAE1575R2040ABDD2-T


RoHS/ RoHS II compliant




► IMPEDANCE CHARACTERISTICS

LOG MAG SMITH(R+jX) 0.000 dB 1.000 CH1 S11 CH2 S11 5.000 dB/ 491 488GHz MKR 1: -35.482 MKR 1: 49.950 Ω 1.581 491 488GHz -1.718 Ω Cor Cor CF [MHz]\BW[MHz] RL(@CF)[ďŔ] 1581.49 Program ended normally E3:Modify F1: Stop F2: Save Trace F4: Calibrate CENTER 1.58GHz [10.00 dBm] SPAN 200MHz

RADIATION PATTERN

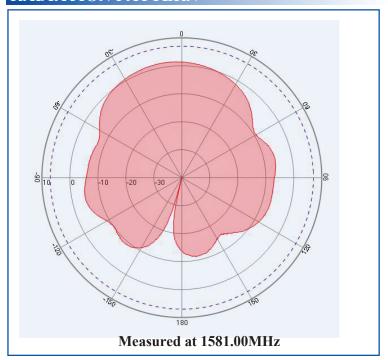

OUTLINE DRAWING:

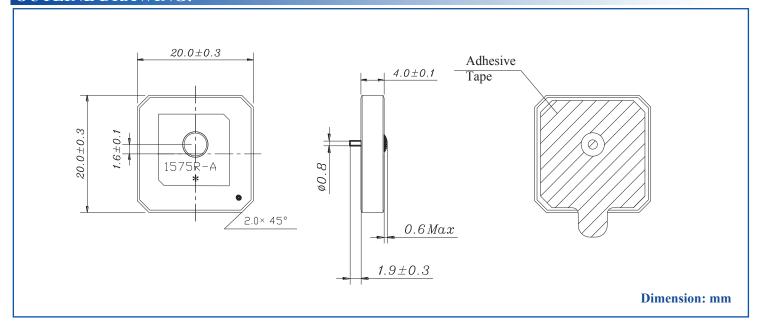



1575.42MHZ; 20.0 x 20.0 x 4.0mm GPS Patch Antenna

APAE1575R2040ABDD2-T

RoHS/ RoHS II compliant





PACKAGING:

"T" is for a vacuum sealed tray containing 50 units.

1000 pieces is the suggested quantity containing 20-trays with 50-pcs per Tray.

NOTE: This product is vacuum packaged to reduce the possibility of oxidation and/or contamination during storage.



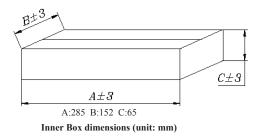

NO.	Name			
1	Cushion			
2	Package			
3	Vacuum Bag			
4	Inner Box			
5	Label			
6	Certificate of approval			
7	Tray			
8	Adhesive tape			

CAUTION:

- (1) Do not apply excess mechanical stress to the component body or terminations. Do not attempt to re-form or bend the components as this will cause damage to the component.
- (2) Do not expose the component to open flame.
- (3) This specification applies to the functionality of the component as a single unit. Please insure the component is thoroughly evaluated in the application circuit.

NOTE:

- 1) The parts are manufactured in accordance with this specification. If other conditions and specifications which are required for this specification, please contact ABRACON for more information.
- 2) ABRACON will supply the parts in accordance with this specification unless we receive a written request to modify prior to an order placement.
- 3) In no case shall ABRACON be liable for any product failure from in appropriate handling or operation of the item beyond the scope of this specification.
- 4) When changing your production process, please notify ABRACON immediately.
- 5) ABRACON Corporation's products are COTS Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. ABRACON's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from ABRACON Corporation is required. Please contact ABRACON Corporation for more information.
- 6) All specifications and Marking will be subject to change without notice.

ATTENTION: Abracon Corporation's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon Corporation is required. Please contact Abracon Corporation for more information.



