


APPROVED: _____
 DATE: _____ TITLE: _____
 CUSTOM CABLE ASSEMBLIES ARE NON-CANCELLABLE/NON-RETURNABLE

Rev	AWO #	Description	Date	Appr
-		RELEASED	10/13/15	
A		ADDED 1FT PART NUMBER	5/3/19	AY/TW

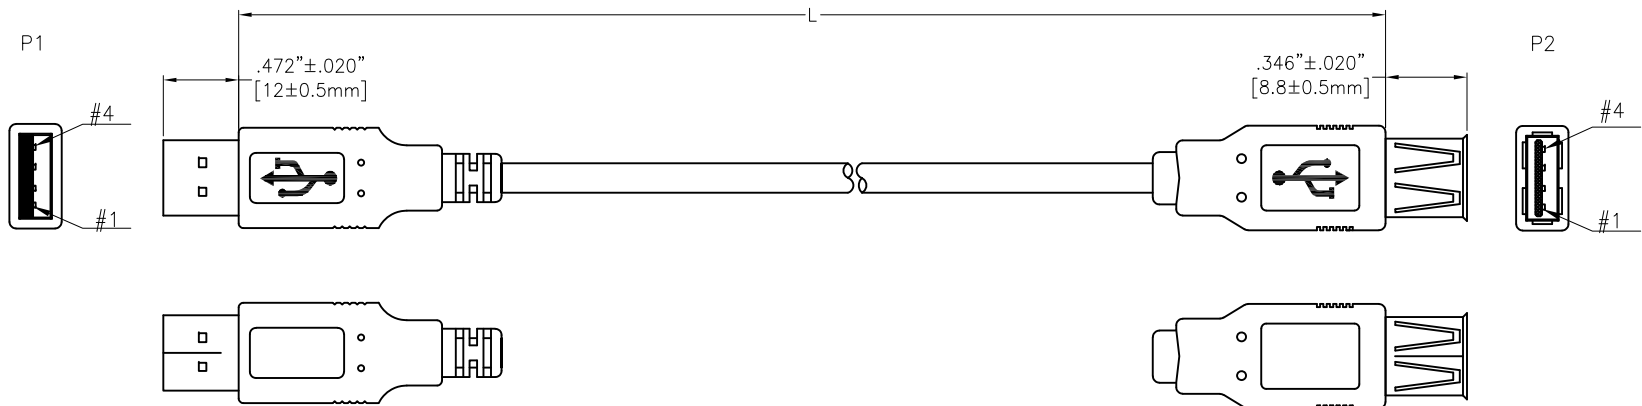

PIN ASSIGNMENT			
P1		RED	P2
1	—	WHITE	1
2	—	GREEN	2
3	—	BLACK	3
4	—	BRAID	4
SHELL	—	SHELL	

ADAM P/N	L
CA-USB-AM/AF-1FT	12.008"±.787" [305±20mm]
CA-USB-AM/AF-3FT	36.024"±1.181" [915±30mm]
CA-USB-AM/AF-6FT	72.047"±1.969" [1830±50mm]
CA-USB-AM/AF-10FT	120.079"±1.969" [3050±50mm]

SPECIFICATIONS:
Connector:
 P1= USB Connector 2.0 A Type Plug, Insulator Color: White, Overmold Color: Black, 50P PVC
 P2= USB Connector 2.0 A Type Socket, Insulator Color: White, Overmold Color: Black, 50P PVC
Cable:
 UL2725, (1P+2C)+A+B, OD: .189" [4.8mm] (28/24),Jacket Color: Black .
Electrical Test:
 All Assemblies must be 100% Tested for
 Shorts, Open, Continuity, and Physical Appearance.
Environmental:
 Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES HOLES .X ± .10 Ø.X ± .10 .XX ± .020 Ø.XX ± .015 .XXX ± .015 Ø.XXX ± .010		ADAM TECH INTERCONNECTS 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710	
APPROVALS DRAWN HR 10/13/15 CHECKED TW 10/13/15 APPROVED		DATE 10/13/15	
TITLE CUSTOMER ASSEMBLY, USB 2.0 PLUG TYPE A TO USB 2.0 SOCKET TYPE A		SIZE X	PART NO. CA-USB-AM/AF-XFT
REF: S00087T		SCALE: NTS	REV. A
SHEET 1 OF 1			