

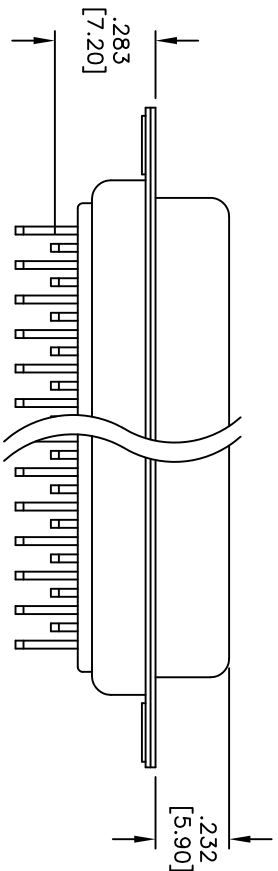



APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	4/22/05	
A		REVISED LAYOUT	7/3/13	

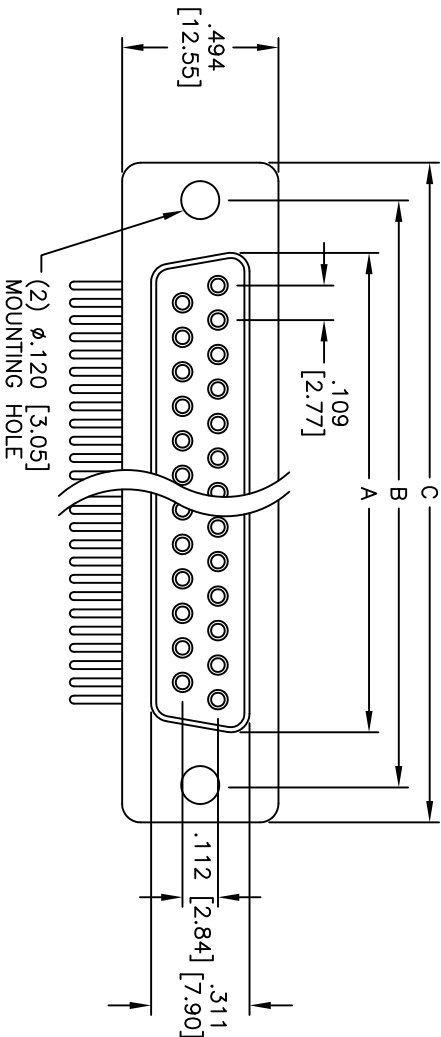

SPECIFICATIONS:

Material:

Insulator: PBT, glass reinforced, rated UL 94V-0

Insulator color: White

Contacts: Phosphor Bronze

Shell: Steel, Tin plated

Plating:

Gold flash over Nickel underplate overall

Electrical:

Operating voltage: 250 VAC max

Current rating: 5 Amps max

Contact resistance: 20 mohms max

Insulation resistance: 5,000 Mohms min

Dielectric withstanding voltage: 1,000 VAC for 1 minute

Temperature Rating:

Operating temperature: -65°C to +125°C

Environmental:

Lead free, RoHS compliant

DXXX	NO. OF CONTACTS	DIMENSIONS		
		A	B	C
DE09	9	.643 [16.33]	.984 [24.99]	1.213 [30.81]
DA15	15	.971 [24.66]	1.312 [33.32]	1.541 [39.14]
DB25	25	1.511 [38.38]	1.852 [47.04]	2.088 [53.04]
DC37	37	2.159 [54.84]	2.500 [63.50]	2.729 [69.32]

ADAM TECH

909 Rahway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

283 [7.20] FOOTPRINT R/A D-SUB SOCKET

MACHINED CONTACTS, 120 [3.05] HOLES

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES .X ± .10 ØXX ± .10 .XX ± .020 ØXXX ± .015 .XXX ± .015 ØXXXX ± .010		DATE		TITLE	
DRAWN	SS	4/22/05		MACHINED CONTACTS, 120 [3.05] HOLES	
CHECKED		X		SIZE PART NO. DXXX-SH-C1C	
APPROVED		REF:		SCALE: NTS SHEET 1 OF 1	

