
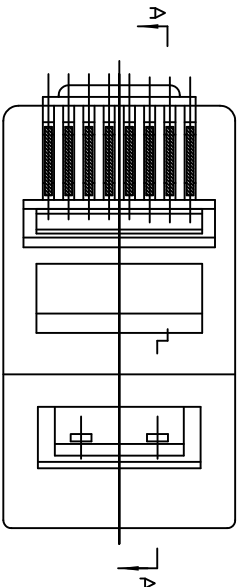


Rev	AWO #	Description	Date	Appr
-		RELEASED	9/27/10	

APPROVED: _____

DATE: _____ TITLE: _____

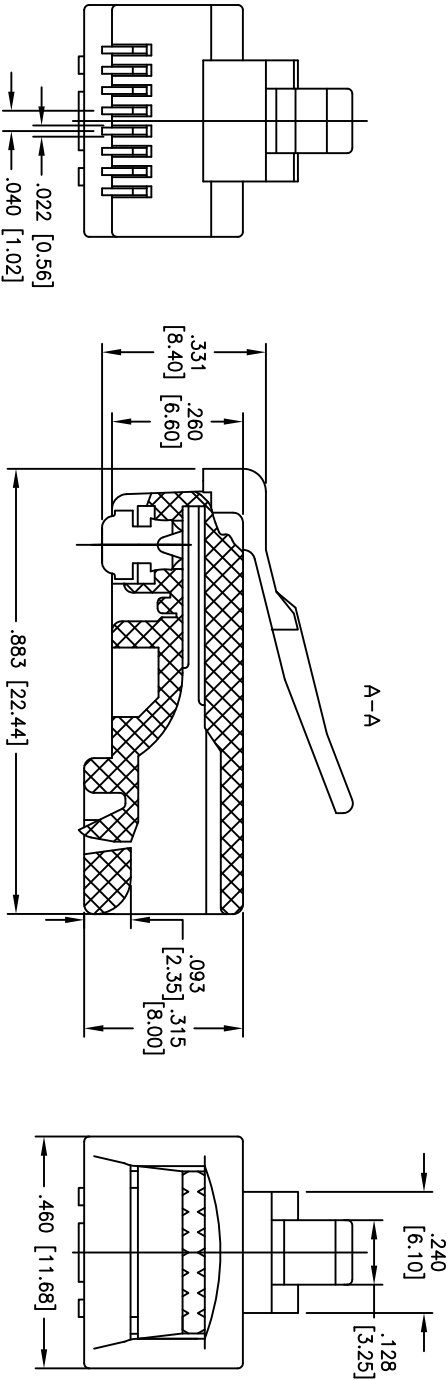

"X"	GOLD PLATING
U	15 µin
W	30 µin
G	50 µin

REPLACE "X" IN PART NUMBER
WITH GOLD THICKNESS DESIGNATOR Reference.

SPECIFICATIONS:

Material:

Insulator: Polycarbonate, rated UL 94V-0

Insulator color: Clear

Contacts: Phosphor Bronze

Plating:

Gold over Nickel underplate overall, See chart for thickness

Electrical:

Operating voltage: 150 VAC max

Current rating: 1.5 Amps max

Insulation resistance: 1000 Mohms min @ 500 VDC

Dielectric withstanding voltage: 1000 VAC for 1 minute

Temperature Rating:

Operating temperature: -65°C to +125°C

Environmental:

Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLES
.X ± .10	Ø.X ± .10
.XX ± .020	Ø.XX ± .015
.XXX ± .015	Ø.XXX ± .010
APPROVALS	DATE
DRAWN AY	9/27/10
CHECKED VW	9/27/10
APPROVED	

ADAM TECH
909 Railway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE
MODULAR TELEPHONE PLUG, 8P8C, CAT5e

SIZE	PART NO.	REV.
X	MTPR-88-X	-
REF:	S00005C	SCALE: NTS
SHEET 1	OF 1	