
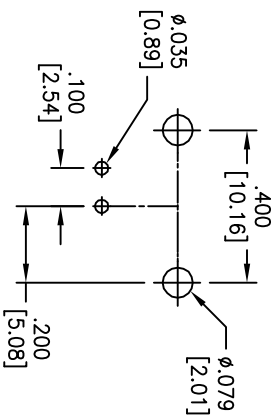
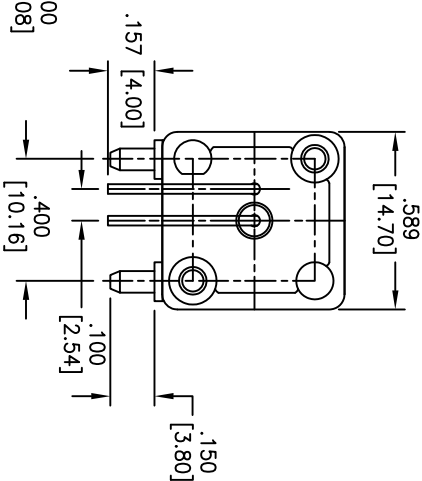
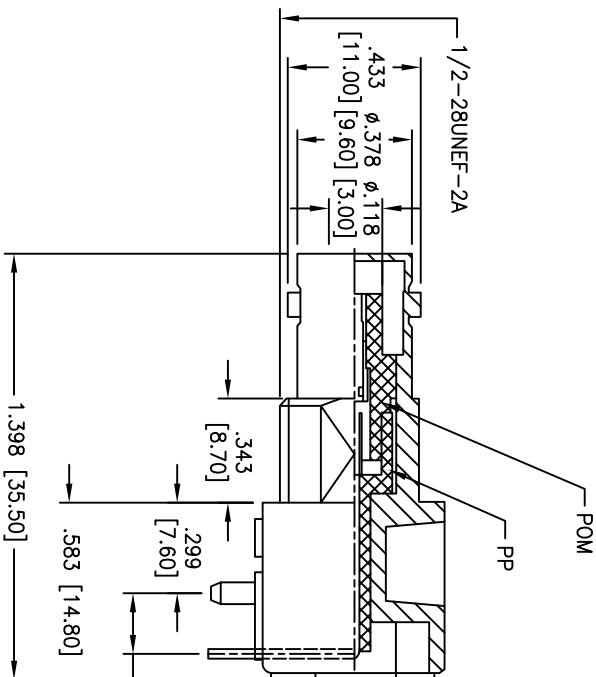


APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	01/03/07	
A		REDRAWN	4/25/11	

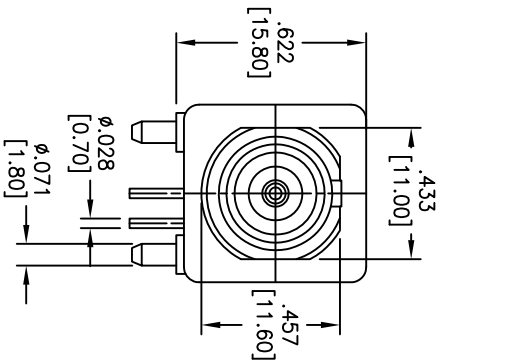

FIXTURE	BRASS	TIN	2
CENTER PIN	PHOSPHOR BRONZE	GOLD	1
CONTACT WIRE	BRASS	TIN	1
INSULATOR	PP	NONE	1
INSULATOR	POM	NONE	1
BODY	ZINC ALLOY	NICKEL	1
DESCRIPTION	MATERIAL	FINISH	QTY

RECOMMENDED PCB HOLE

SPECIFICATIONS

Electrical

Nominal Impedance: 75 Ohms

Frequency Range: 0 – 1 GHz

Maximum Peak Voltage: 500V

Insulation Resistance: 5000 Mohms min @ 500 VDC

Dielectric Withstanding Voltage: 1500 VAC rms.

Environmental:

Lead free, RoHS compliant.

Recommended soldering temp: 235 for 5 sec.



ADAM TECH

909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

RF CONNECTOR, TYPE BNC,
RIGHT ANGLE, PCB, 75 OHM

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM [INCHES] TOLERANCES: EXCEPT AS NOTED				TITLE			
INCHES				RF CONNECTOR, TYPE BNC, RIGHT ANGLE, PCB, 75 OHM			
Holes				Part No.			
.X ± .10				RF1-01A-D-00-75-M			
.XX ± .020				REV. A			
.XXX ± .015				SHEET 1 OF 1			
.XXX ± .015							
APPROVALS							
DATE							
DRAWN							
BW							
01/03/07							
CHECKED							
APPROVED							
X							
S00049T							
SCALE: NTS							