

6

5

4

3

2

1

APPROVED: _____

DATE: _____ TITLE: _____

Rev

AWO #

Description

Date

Appr

-

RELEASED

5/13/19

D

D

C


C

B

B

A

A

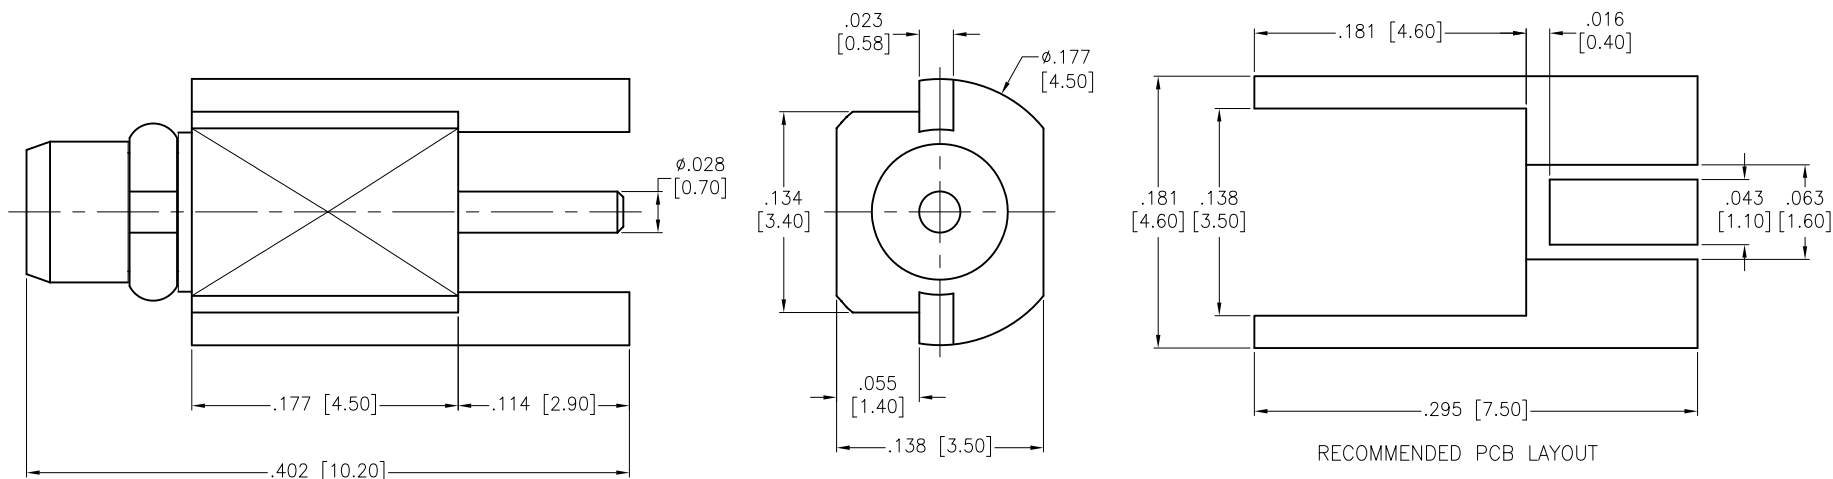

RING	BE CU	GOLD
CONTACT PIN	BRASS	GOLD
INSULATOR	PTFE	WHITE
BODY	BRASS	GOLD
DESCRIPTION	MATERIAL	FINISH

SPECIFICATIONS:**Electrical:**

Nominal Impedance: 50 ohms

Frequency range: 0–6 GHz

Working Voltage: 170 VOLTS Max

Proof Voltage: 500 VOLTS

Temperature Rating:

Operating temperature: –55°C to +155°C

Environmental:

Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED
INCHES HOLES

.X	± .10	Ø.X	± .10
.XX	± .020	Ø.XX	± .015
.XXX	± .015	Ø.XXX	± .010

APPROVALS

DATE

DRAWN

AY

5/13/19

CHECKED

NL

5/13/19

APPROVED

ADAM
TECH
INTERCONNECTS

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE

RF CONNECTOR, TYPE MMCX STR.
50 OHM, EDGE MOUNT, PLUG

SIZE

X

PART NO.

RF12-35-T-00-50-G

REV.

-

REF: S00277T

SCALE: NTS

SHEET 1 OF 1

6

5

4

3

2

1