
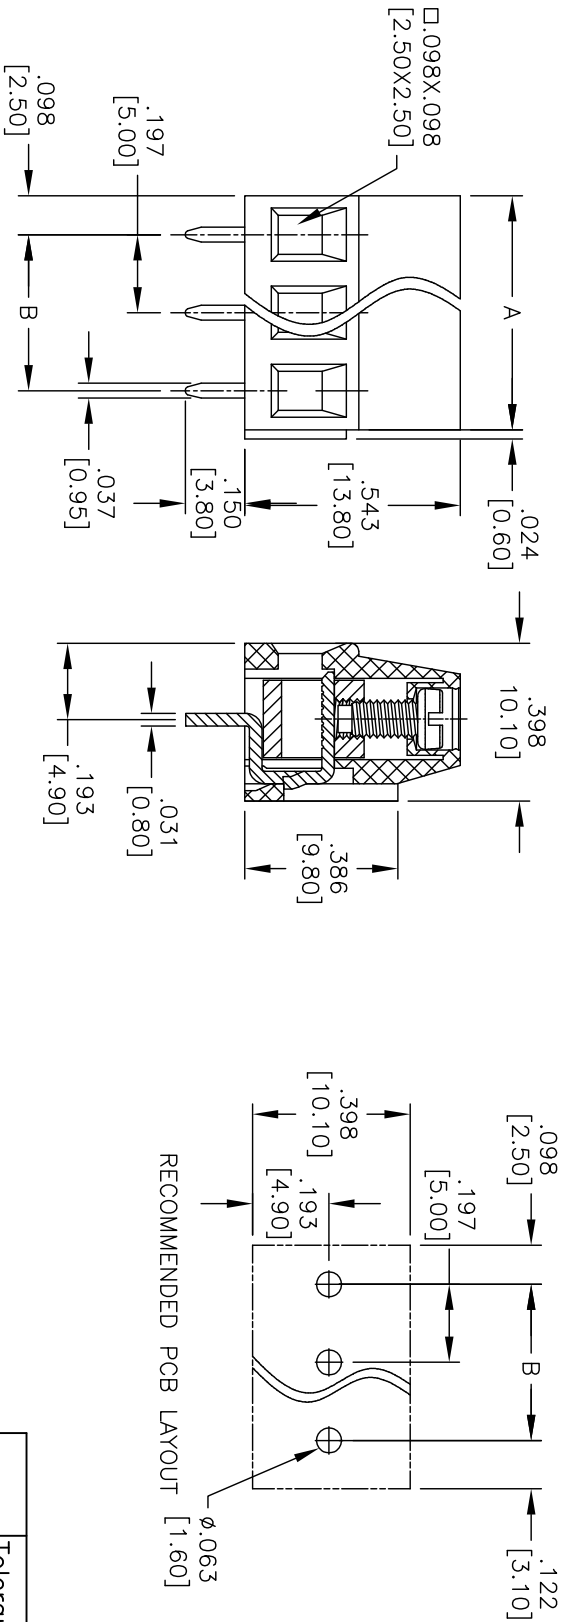


| Rev | AWO # | Description | Date    | Appr |
|-----|-------|-------------|---------|------|
| -   |       | RELEASED    | 9/14/11 |      |
| A   |       | ADDED SPEC. | 6/27/13 |      |

APPROVED: \_\_\_\_\_

DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_



**SPECIFICATIONS:**

**Material:**  
Insulator: Thermoplastic, rated UL 94V-0  
Insulator color: Green  
Screw: M2.5, Steel, Zn plated.  
Contact: Brass, Tin plated.  
**Electrical:**  
Operation voltage: 300 VAC  
Current rating: 10 Amps  
**Mechanical:**  
Solid wire (AWG): 12-24  
Stranded wire (AWG): 12-24  
Withstanding Voltage: 1.6KV  
Wire strip length: 6-7mm  
**Temperature Rating:**  
Operating temperature: -40°C to +115°C  
**Environmental:**  
Lead free, RoHS compliant.



Poles: 2 thru 24  
A = .197 [5.00] X No. of Positions  
B = .197 [5.00] x No. of Spaces

|        | Tolerance    |
|--------|--------------|
| 2-6P   | ±.006 [0.15] |
| 7-12P  | ±.008 [0.20] |
| 13-18P | ±.012 [0.30] |
| 19-24P | ±.016 [0.40] |

**ADAM TECH**

909 Rahway Avenue, Union, NJ 07083  
Phone: 908-687-5000 Fax: 908-687-5710

EURO BLOCK, .197" [5.00] PITCH

|                                                                                                       |        |         |        |                                |            |
|-------------------------------------------------------------------------------------------------------|--------|---------|--------|--------------------------------|------------|
| UNLESS OTHERWISE SPECIFIED<br>ALL DIMENSIONS ARE MM [INCHES]<br>TOLERANCES: EXCEPT AS NOTED<br>INCHES |        | HOLE5   |        | TITLE                          |            |
| .X                                                                                                    | ± .10  | Ø.X     | ± .10  | EURO BLOCK, .197" [5.00] PITCH |            |
| .XX                                                                                                   | ± .020 | Ø.XX    | ± .015 |                                |            |
| .XXX                                                                                                  | ± .015 | Ø.XXX   | ± .010 |                                |            |
| APPROVALS                                                                                             |        | DATE    |        | REV.                           |            |
| DRAWN                                                                                                 | AY     | 9/14/11 |        | SIZE                           | PART NO.   |
| CHECKED                                                                                               |        |         |        | X                              | EB20-XX-C  |
| APPROVED                                                                                              |        |         |        | REF: S00007T                   | SCALE: NTS |
|                                                                                                       |        |         |        | SHEET 1 OF 1                   |            |