

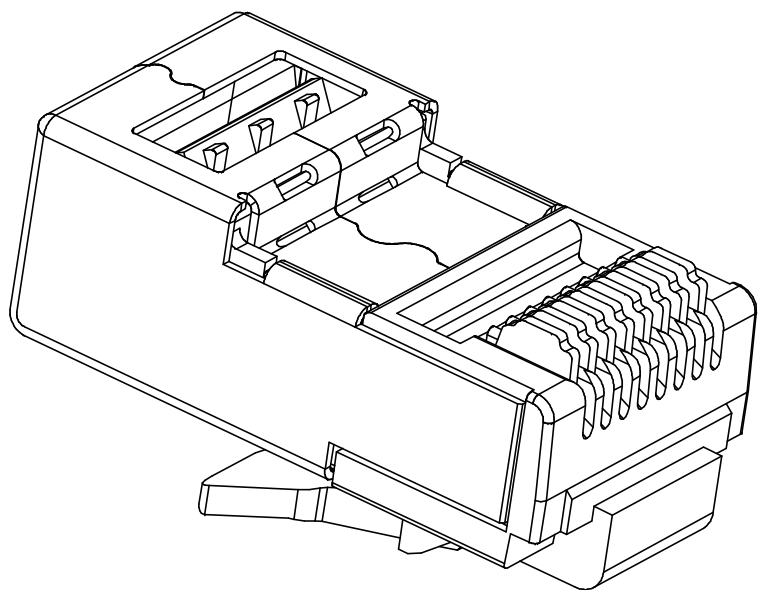
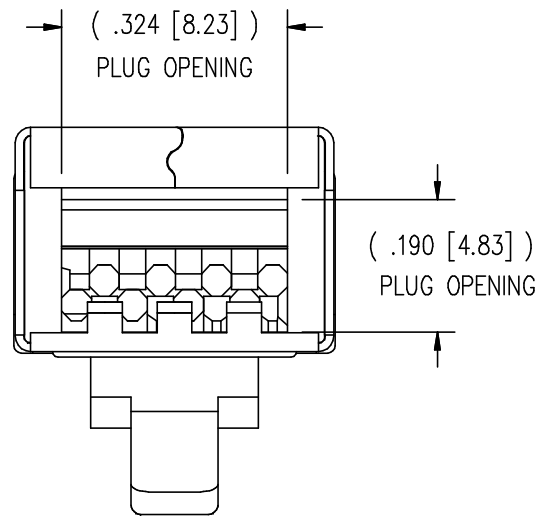
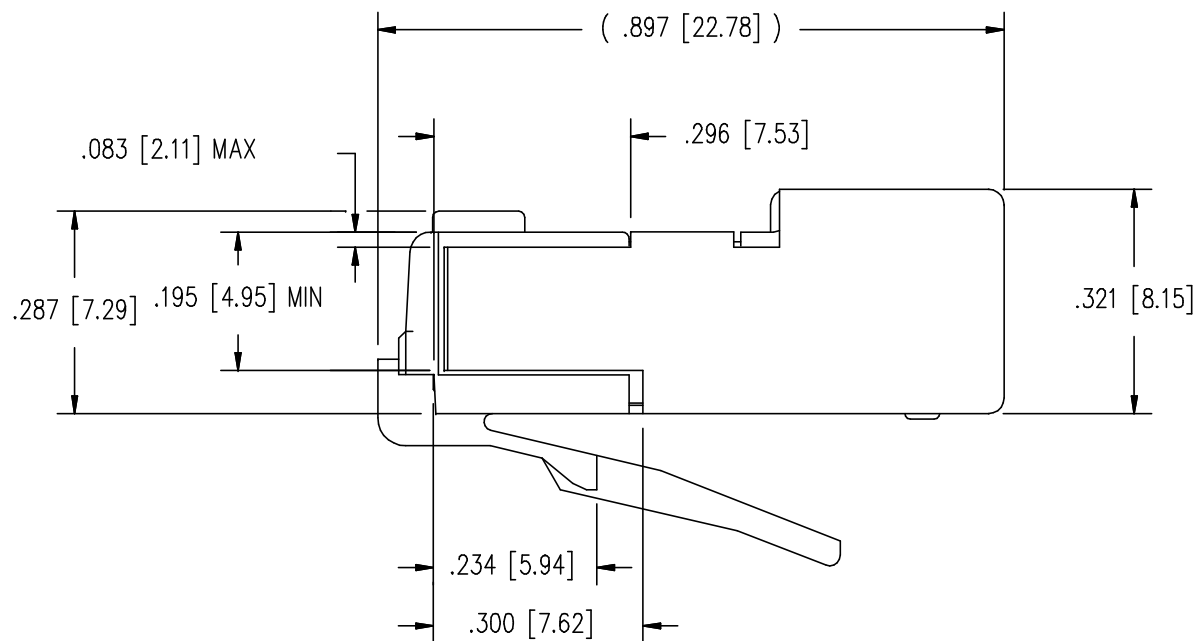


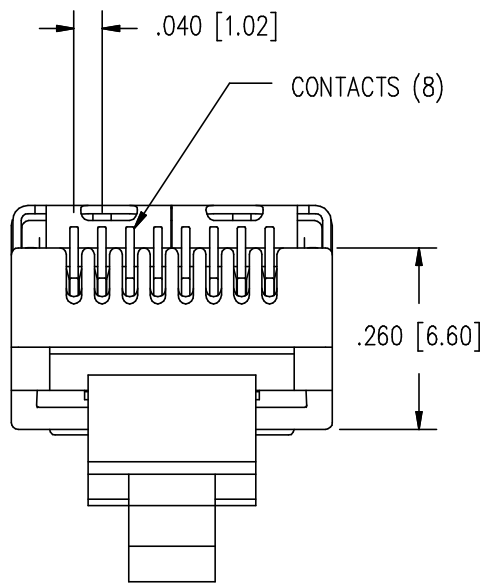

DESCRIPTION:	MODULAR PLUG, SHIELDED,
MODEL NUMBER:	32-CAT5E-RAY
APPLICATION:	CONTACTS TERMINATE STRANDED OR SOLID CONDUCTORS BETWEEN .037[0.94] TO .042 [1.07] OUTSIDE DIAMETER OF INSULATION (24 - 26 AWG)
CRIMP TOOL:	N/A
IMPEDANCE:	N/A
FREQUENCY RANGE:	N/A
MATERIAL:	HOUSING SHIELD CONTACT
RoHS COMPLIANCE:	YES
TECHINCAL DETAIL:	N/A
	CLEAR POLYCARBONATE UL94-V0 COPPER ALLOY, NICKEL PLATED COPPER ALLOY, SELECTIVE GOLD PLATING

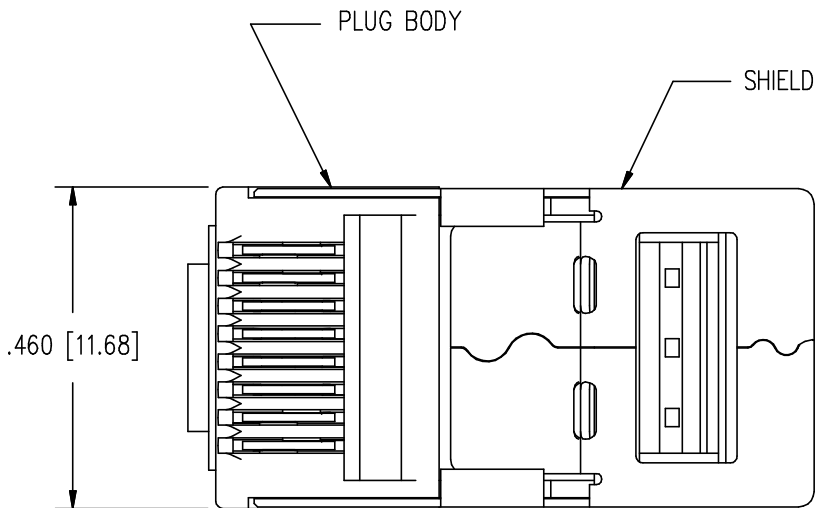

 THE PROPRIETARY DOCUMENT IS PROPERTY OF CINCH CONNECTIVITY SOLUTIONS. IT IS CONFIDENTIAL IN NATURE, NON-TRANSFERABLE, AND ISSUED WITH THE UNDERSTANDING THAT IT IS NOT TO BE REPRODUCED OR COPIED WITHOUT PERMISSION AND IS RETURNABLE UPON DEMAND. INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5-2009	3RD ANGLE PROJECTION		AIM-Cambridge	
	RoHS2 ☒ 2011/65/EU		Title: MODULAR PLUG, SHIELDED	
	UNLESS OTHERWISE SPECIFIED .XX ±.02 .XXX ±.005 ANGLES ±2°		Model No. 32-CAT5E-RAY	
	Size B	DO NOT SCALE DRAWING	Date: 2017/7/31	Sheet 1 of 1