




Terminals & Splices > Quick Disconnects

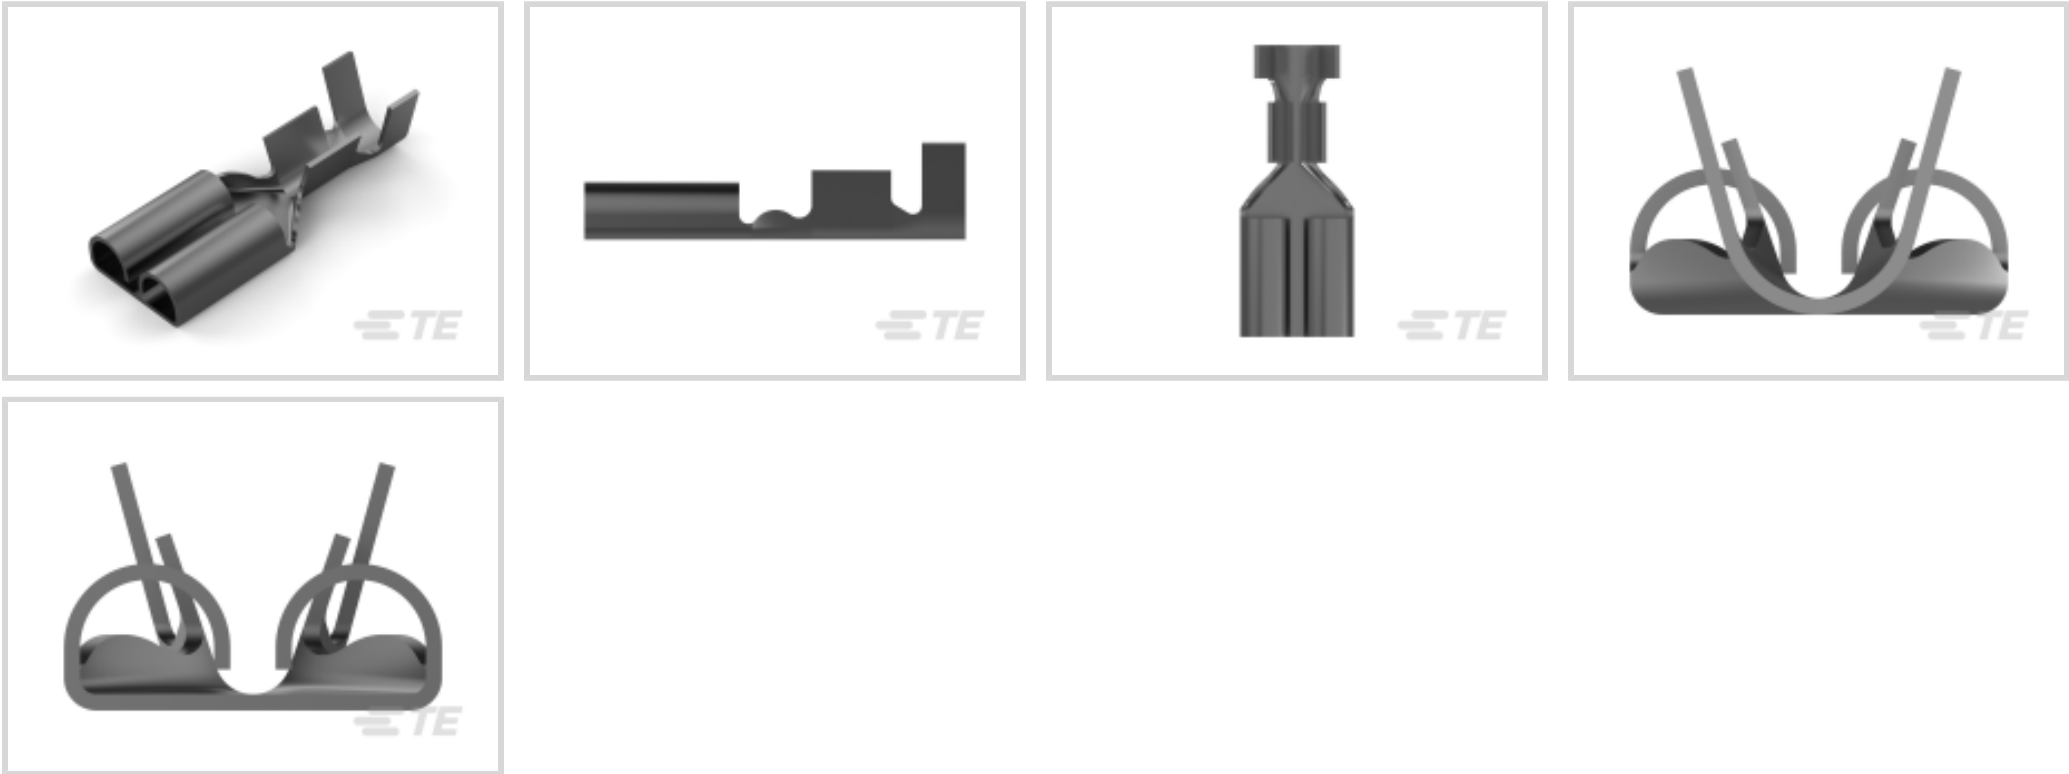

Quick Disconnect Terminal Type: **Receptacle**

Wire Size: **.5 – 2.5 mm²**

Mating Tab Width: **6.35 mm [.25 in]**

Mating Tab Thickness: **.81 mm [.032 in]**

Features

Product Type Features

Insertion Force	Normal
-----------------	--------

Configuration Features

Connection Capacity	Single
Compatible With Wire & Cable Type	Discrete Wire

Contact Features

Quick Disconnect Terminal Type	Receptacle
Mating Tab Width	6.35 mm[.25 in]
Mating Tab Thickness	.81 mm[.032 in]
Terminal Orientation	Straight
Contact Base Material	Brass
Terminal Plating Material	Tin
Crimp Type	F-Crimp
Barrel Type	Open

Termination Features

--	--



Product Terminates To	Wire & Cable
-----------------------	--------------

Mechanical Attachment

Wire Insulation Support	With
Mating Retention Type	Dimple

Dimensions

Terminal Material Thickness	.33 mm[.013 in]
Product Length	19.2 mm[.755 in]
Compatible Insulation Diameter Range	2.16 – 3.43 mm[.085 – .135 in]
Wire Size	.5 – 2.5 mm²

Usage Conditions

Insulation Option	Uninsulated
Operating Temperature Range	-40 – 110 °C[-40 – 230 °F]

Industry Standards

Agency/Standard	UL
-----------------	----

Packaging Features

Packaging Quantity	6000
Packaging Method	Strip/Reel

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer



This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

TE Part # 346697-2 250 FASTON, REC., 20-16 AWG, TPBR	TE Part # 1742754-1 FASTON RECEPTACLE 26-22 AWG TPBR	TE Part # 170304-1 250 FASTON, REC., 22-18 AWG, BR	TE Part # 170304-2 250 FASTON, REC., 22-18 AWG, BR
TE Part # CAT-M9194-CH8172 MULTILOCK, CONNECTOR HOUSING	TE Part # 724659-2 EXT TOOL FOR POSITIVE .250	TE Part # 174925-4 070 MLC W-W PLUG HSG 11P GREEN	TE Part # 174925-5 070 MLC W-W PLUG HSG 11P BLUE
TE Part # 174926-5 070 MLC W-W PLUG HSG 13P BLUE	TE Part # 174927-4 070 MLC W-W PLUG HSG 15P GREEN	TE Part # 174925-2 HOUSING, PLUG, 11 POSITION, .070	

Also in the Series | FASTON 250



Compression Connectors(4)



Crimp Terminal Housings(142)



Insertion & Extraction Tools(6)



Magnet Wire Terminals(1)



PCB Terminals(135)




Quick Disconnects(445)



Splices(4)

Customers Also Bought

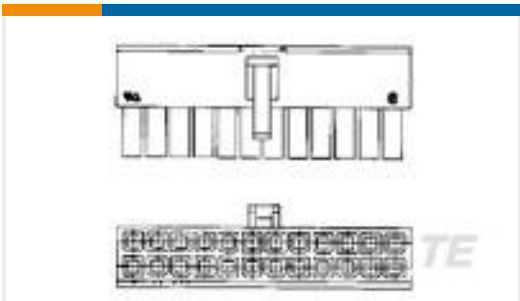


TE Part #2-794954-2
22P RCPT VAL-U-LOK V2




TE Part #170147-2
MNL SOCKET PRE-TIN PH BR




TE Part #2825207-1
VAL-U-LOK SKT HCS SN 16AWG

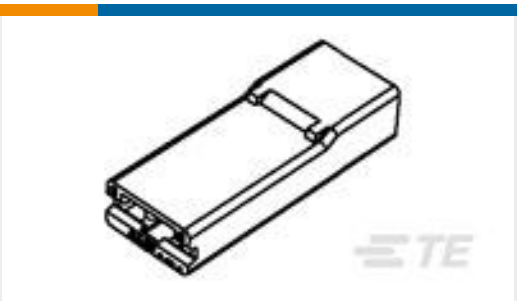

TE Part #7-1377174-6
SMP 0-0735075-0

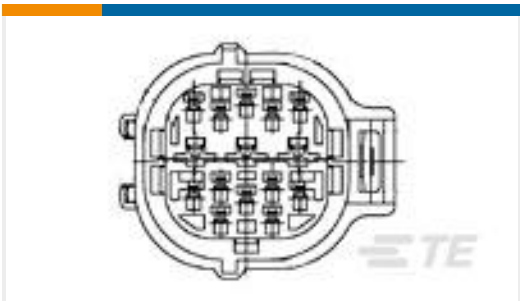

TE Part #2-85262-1
E-S MK-2(+) 15P PLUG ASSY

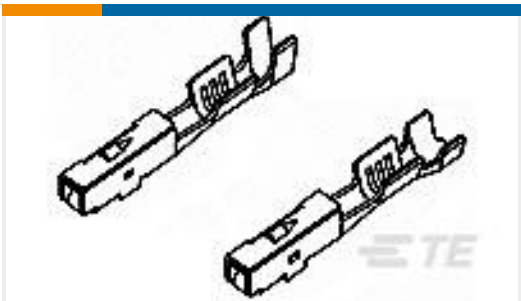

TE Part #175268-1
070 REC (S) FOR NSCC



TE Part #2005091-1
025 32P CAP ASSY



TE Part #1-2299987-4
65W SEAL PLUG,CONN KIT



TE Part #2066010-1
2P SUPERSEAL 1.5 SRS PLUG ASSY
BLACK



TE Part #8-1415546-7
RP314012

Documents



Product Drawings

250 FASTON,REC.,20-14 AWG,TPBR

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_170032-4_AS_c-170032-4-as.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_170032-4_AS_c-170032-4-as.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_170032-4_AS_c-170032-4-as.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

Crimping of 250 Series Tab and Receptacle Contacts

Japanese

Application Specification

Japanese

Application Specification

Japanese

Crimping of 250 Series Tab and Receptacle Contacts

Japanese

Product Environmental Compliance

Product Compliance

English

Product Compliance

English