



LOC	DIST	REVISIONS					
DF	AO	P	LTR	DESCRIPTION	DATE	DWN	APVD
			A	REV PER ECO 05-04936	7-19-05	CT	RG

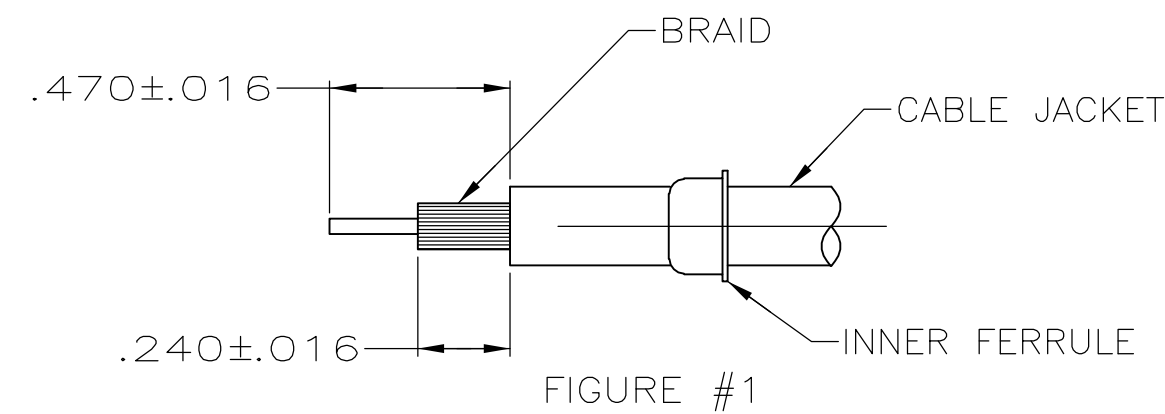

1. CABLE PREPARATION:
 - A. SLIDE INNER FERRULE ONTO CABLE MAKING SURE TO KEEP THE LARGER DIAMETER OF INNER FERRULE OPPOSITE FROM THE END OF THE CABLE BEING TERMINATED. (SEE FIGURE #1)
 - B. STRIP OUTER JACKET AND BRAID AS INDICATED IN FIGURE #1. CARE SHOULD BE TAKEN NOT TO NICK OR CUT THE BRAID STRANDS DURING THE REMOVAL OF THE JACKET.
 - C. EVENLY FLARE THE BRAID BACK OVER THE OUTER JACKET AND CUT CENTER CONDUCTOR & DIELECTRIC WITHIN THE LIMITS INDICATED IN FIGURE #2.
 - (1) CARE SHOULD BE TAKEN NOT TO NICK OR CUT INDIVIDUAL CONDUCTORS DURING REMOVAL OF DIELECTRIC.
 - (2) INDIVIDUAL CONDUCTORS SHOULD BE TWISTED TIGHTLY TO ELIMINATE LOOSE WIRE STRANDS.

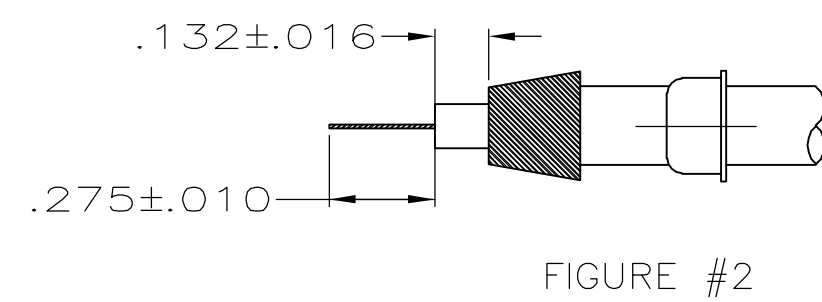

SCALE 2:1

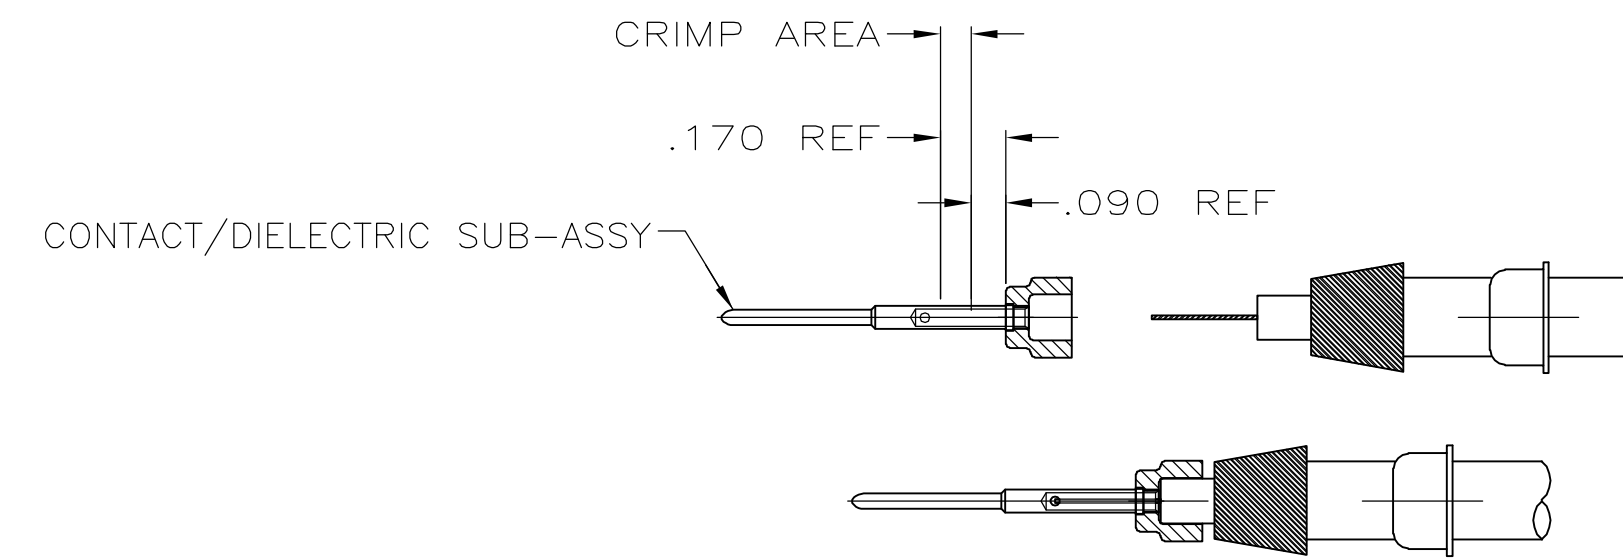


FIGURE #3

2. CRIMPING:
- A. CENTER CONDUCTOR-- CRIMP CENTER CONDUCTOR USING DANIELS MFG CORP 4-8 INDENT HANDTOOL M22520/2-01. THE HANDTOOL CRIMP SELECTOR SHOULD BE SET TO #5. NO LOCATOR IS NECESSARY. INSERT THE CONTACT DIELECTRIC SUB-ASSEMBLY INTO HANDTOOL. THE DIELECTRIC WILL POSITION THE CENTER CONTACT. INSERT THE CENTER CONDUCTOR INTO CONTACT WIRE BARREL. THE TIP OF THE STRIPPED WIRE SHOULD BE VISIBLE IN THE WIRE BARREL SIGHT HOLE. CRIMP AND REMOVE CENTER CONTACT. SEE FIGURE #3.
 - B. INSERT THE CRIMPED CENTER CONTACT AND CABLE INTO OUTER CONTACT BODY. SLIDE FERRULE INTO OUTER CONTACT BODY CAPTURING TRIMMED BRAID BETWEEN FERRULE AND SHELL BODY.
 - C. FERRULE CRIMP-- PLACE CONTACT ASSEMBLY INTO AMP HAND CRIMPING TOOL 58249-1 AND BOTTOM FRONT END OF CRIMP END FERRULE ON THE CRIMPER. COMPLETE CRIMPING AND RELEASE CONTACT. SEE FIGURE #4.
 - D. AFTER CRIMPING, THE DIAMETER ACROSS THE ϕ .200 DIMENSION, SHOWN IN FIGURE #4 SHOULD BE .273-.276.





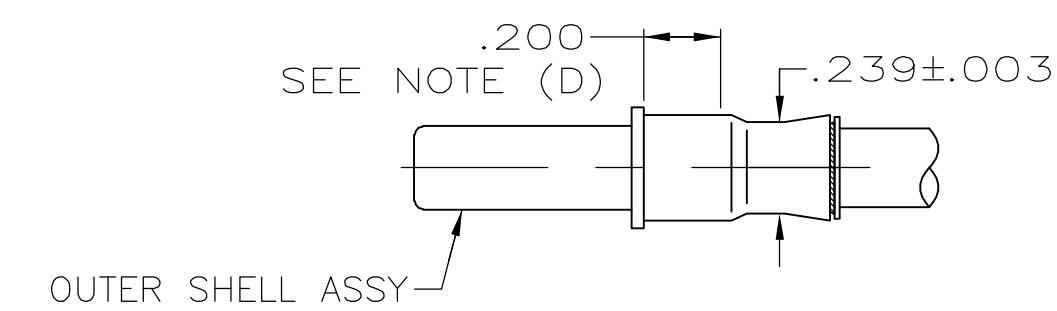


FIGURE #4

SCALE 2:1

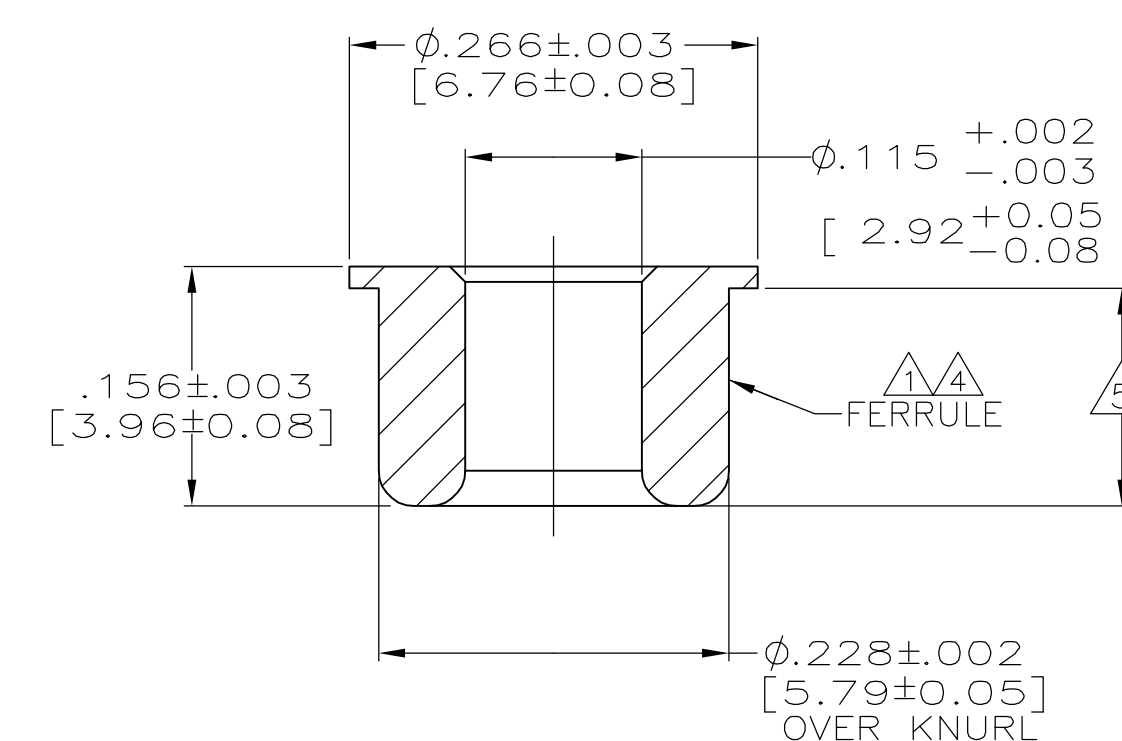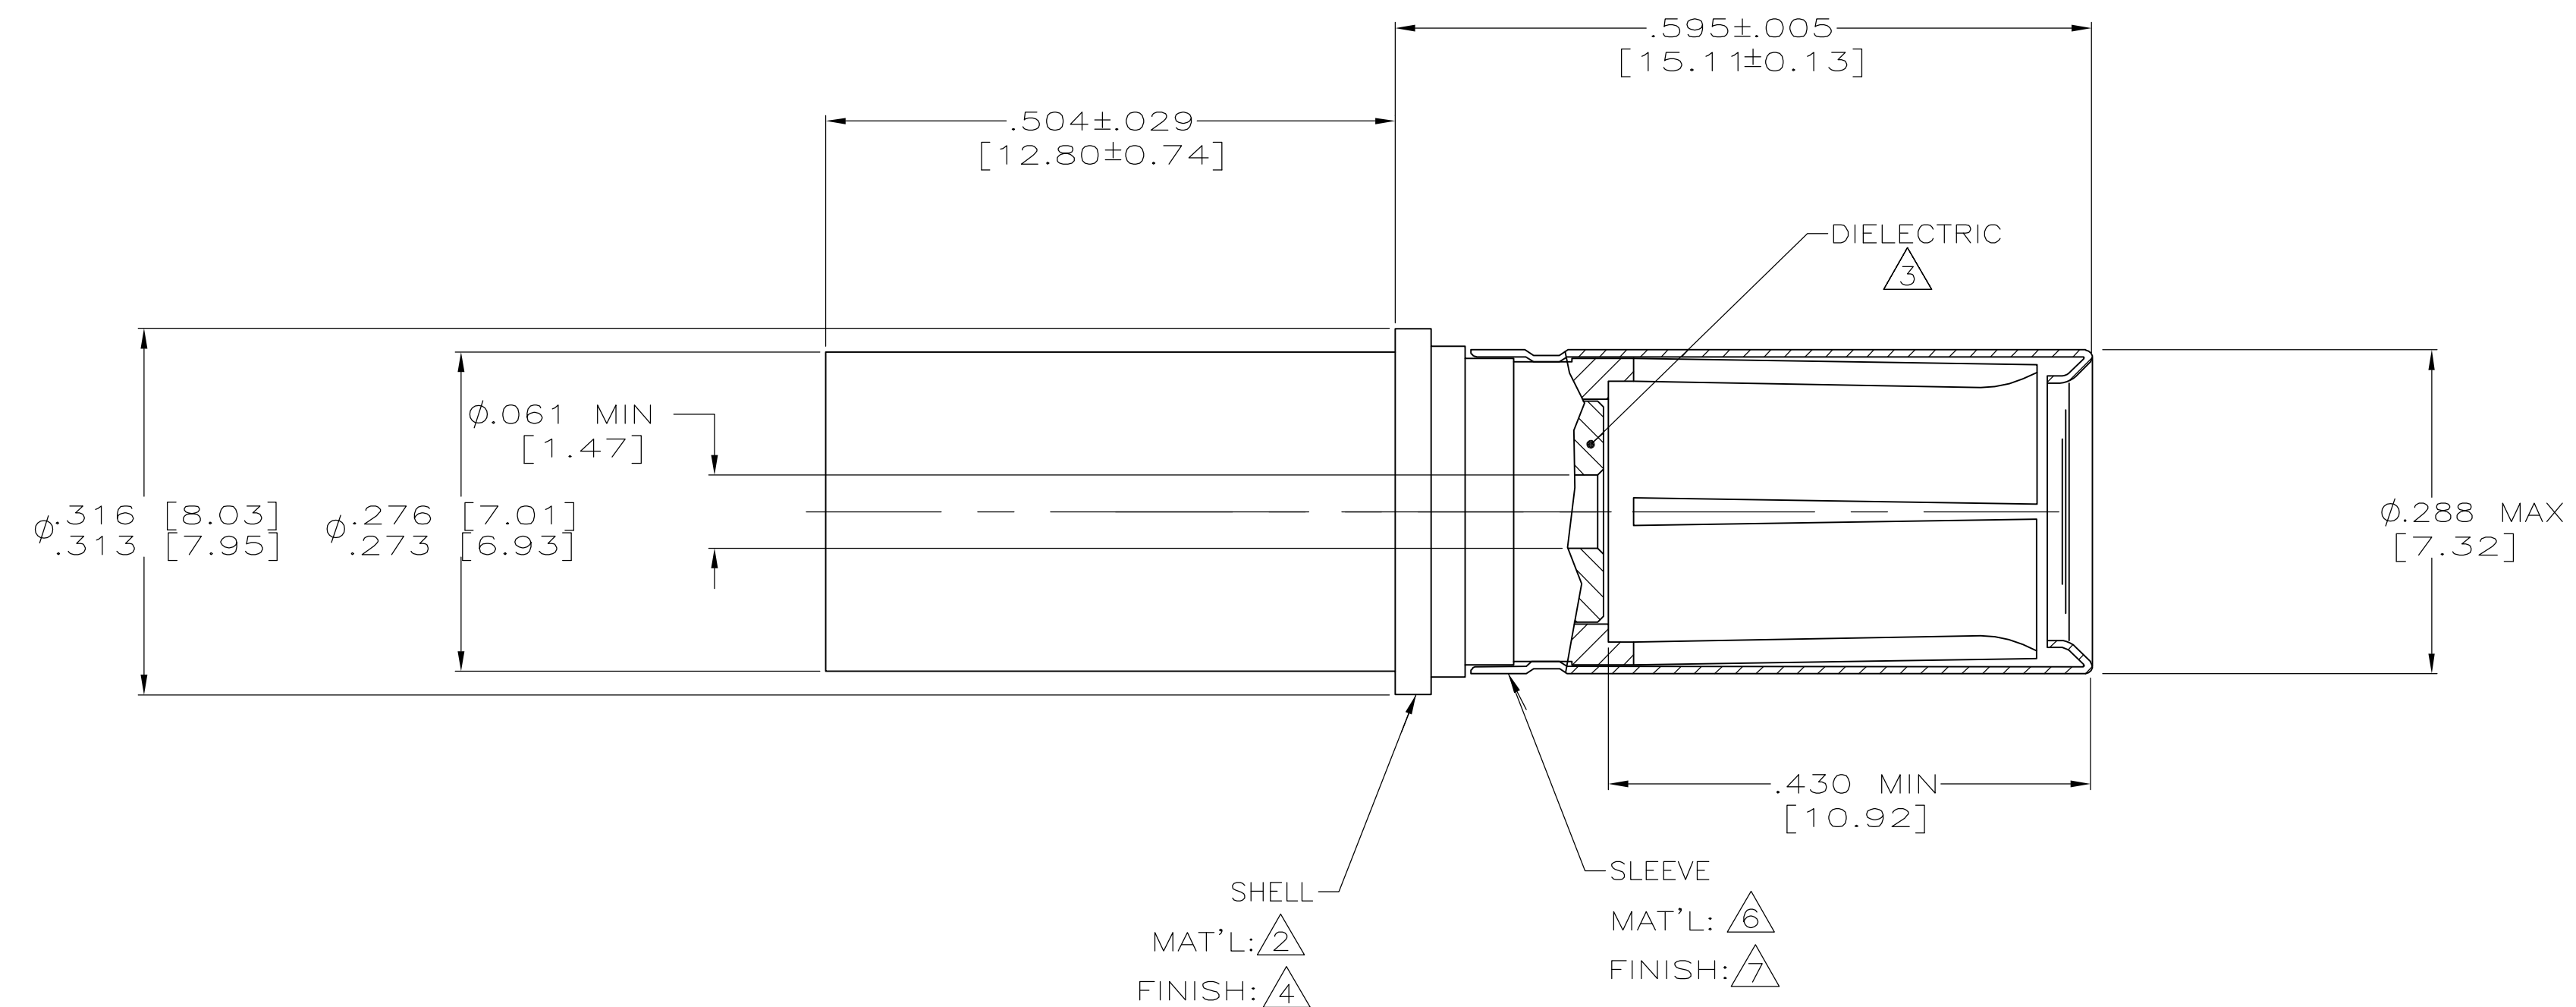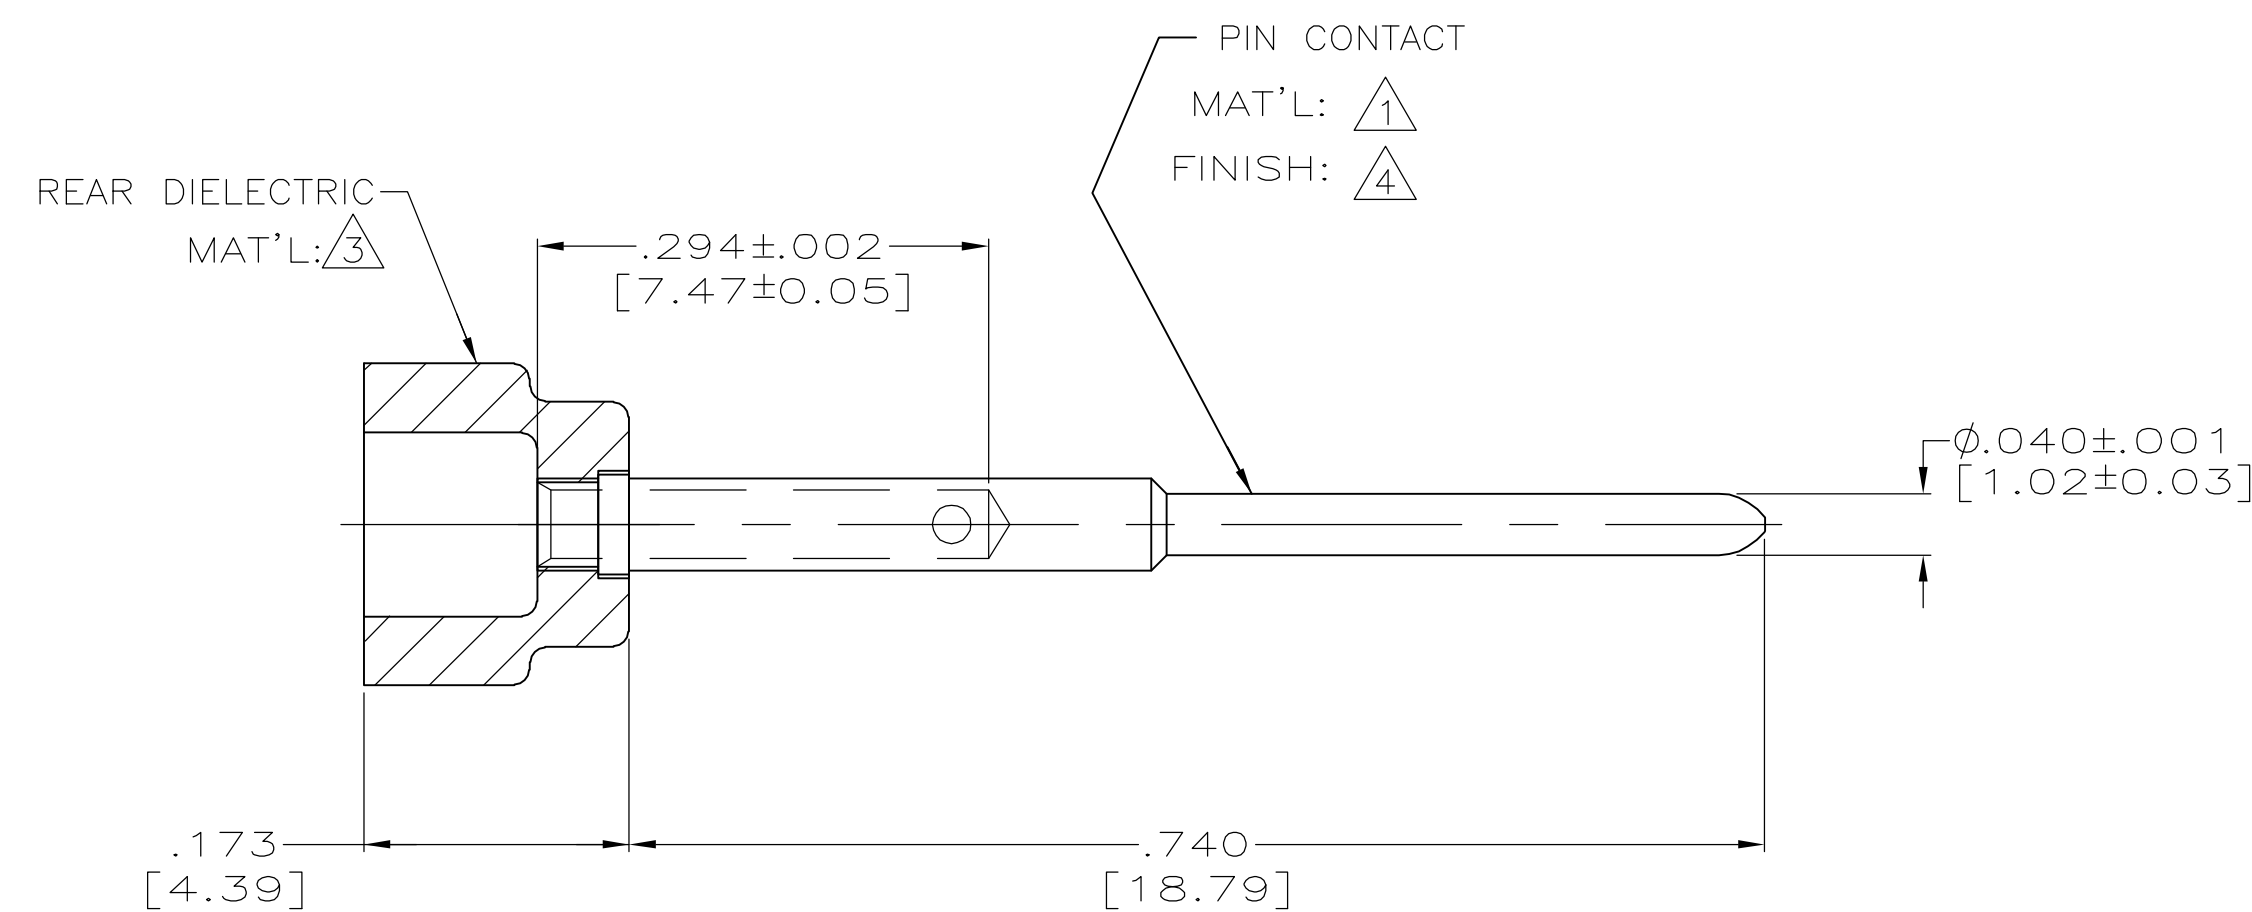

- ① MAT'L: BRASS PER ASTM-B-16
- ② MAT'L: BERYLLIUM COPPER PER ASTM-B-196.
- ③ MAT'L: PTFE PER ASTM-D-1710.
- ④ FINISH: GOLD PLATE PER MIL-G-45204, TYPE 1, GRADE C,
CLASS 1 OVER NICKEL .000050 [0.0013] THK PER QQ-N-290, CLASS 2.
- ⑤ 160 DP. FULL DIAMOND KNURL OVER THIS LENGTH.
- ⑥ MAT'L: STAINLESS STEEL PER QQ-S-766.
- ⑦ FINISH: PASSIVATE PER QQ-P-35.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 6-23-05		AMP Tyco Electronics Corporation Harrisburg, Pa 17105-3608	
		CHK C.T.HOMAS 6-23-05			
		APV R.GROSS 6-23-05			
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME COAX SOCKET CONTACT ASSY REAR RELEASE, SIZE 8	
INCHES		R.GROSS			
		PRODUCT SPEC			
		APPLICATION SPEC			
		ANGLES			
		FINISH			
MATERIAL		WEIGHT		RESTRICTED TO	
SEE CALLOUTS		—		—	
		CUSTOMER DRAWING		SIZE CAGE CODE DRAWING NO	
				A1 00779 C=1757891	
				SCALE 8:1 SHEET 1 OF 1 REV —	