




Automotive Parts > Automotive Connectors > Automotive Headers > Signal Header

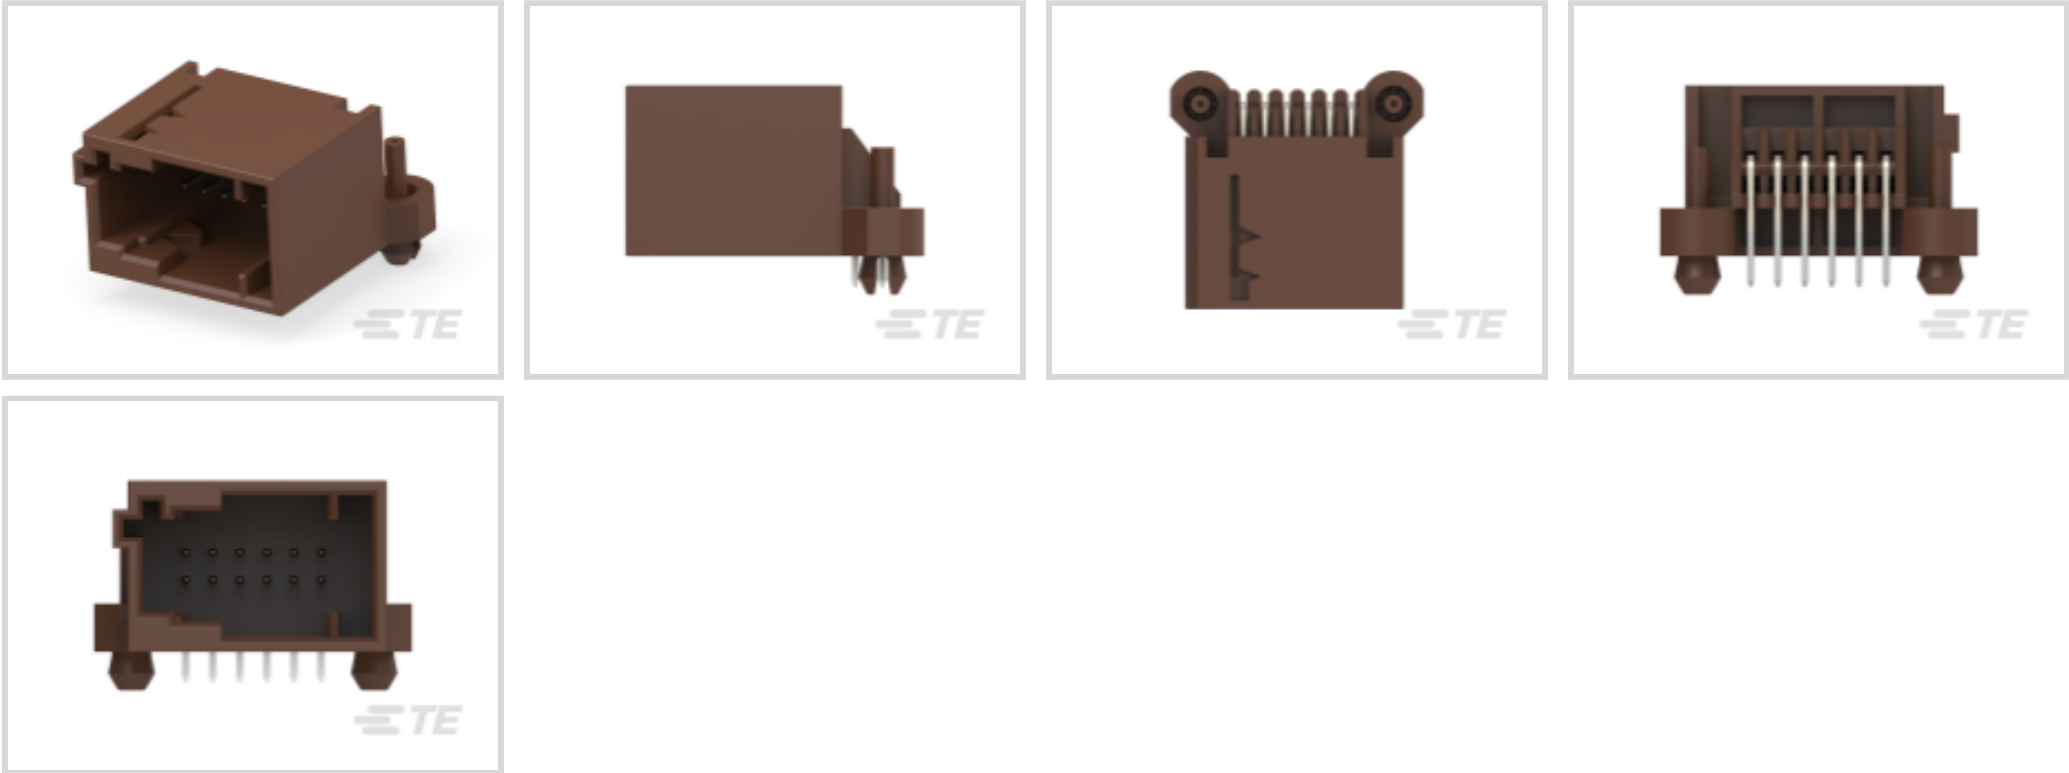

PCB Mount Orientation: **Horizontal**
Termination Method to PCB: **Through Hole - Solder**
Sealable: **No**
Centerline (Pitch): **2.54 mm [.1 in]**
Connector System: **Wire-to-Board**

[All Signal Header \(240\)](#)

Features

Product Type Features

Connector Product Type	Connector Assembly
Mixed & Hybrid Header	No
Header Type	Fully Shrouded
Connector Shape	Rectangular
Sealable	No
Connector System	Wire-to-Board
Connector & Contact Terminates To	Printed Circuit Board

Configuration Features

Number of Signal Positions	12
Number of Sections	1
PCB Mount Orientation	Horizontal
Number of Positions	12
Number of Rows	2



Electrical Characteristics

Operating Voltage	12 VDC
Nominal Voltage Architecture	12 V

Body Features

Connector & Keying Code	3
Primary Product Color	Brown

Contact Features

Mating Tab Width	.63 mm[.025 in]
Mating Tab Thickness	.63 mm[.025 in]
Contact Type	Tab
Contact Mating Area Plating Material	Tin (Sn)

Termination Features

Termination Method to PCB	Through Hole - Solder
---------------------------	-----------------------

Mechanical Attachment

Panel Mount Feature	Without
Mating Retention Type	Locking Interface
PCB Mount Retention	With
Mounting Holes	Without
PCB Mount Retention Type	Boardlock
Mating Alignment	With
PCB Mount Alignment	Without

Housing Features

Centerline (Pitch)	2.54 mm[.1 in]
--------------------	----------------

Dimensions

Connector Width	27.9 mm[1.098 in]
PCB Thickness (Recommended)	1.6 mm[.063 in]
Connector Length	29.8 mm[1.173 in]
Profile Height from PCB	16 mm[.63 in]

Usage Conditions

Operating Temperature (Max)	65 °C, 70 °C, 75 °C, 80 °C, 85 °C[149 °F][158 °F][167 °F][176 °F][185 °F]
Operating Temperature Range	-40 – 85 °C[-40 – 185 °F]



Operation/Application

Shielded	No
Circuit Application	Signal

Packaging Features

Packaging Quantity	1472
Packaging Method	Tray

Other

Interface Number	208-15544
------------------	-----------

Product Compliance

For compliance documentation, visit the product page on [TE.com](#)>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts





TE Part # 1379096-1
COV+LEV MQS 12W 90DEG BRO



TE Part # 1-185739-3
12W MQS RIGHT ANGLE HSG



TE Part # CAT-M8793-T273
MQS, RECEPTACLE AND TAB



TE Part # 185739-3
12W MQS RIGHT ANGLE HSG



TE Part # 1379219-1
12POS MQS REC

Customers Also Bought




TE Part #CSE-SGAM-305-SGFB
SMA to SMA 305mm RG316



TE Part #CONSMA002-SMD-G-T
SMA Jack 50 Ohm PCB Surface Mount




TE Part #1011-344-0205
DUST CAP, 2P, PLG, BLK, DT

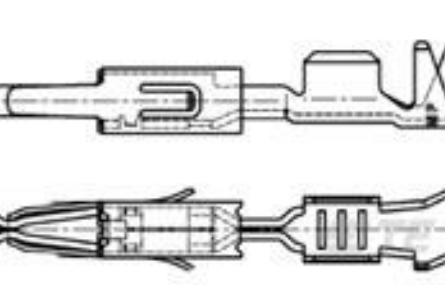


TE Part #964274-2
MT2 A REC 1.6 Contact SWS Sn



TE Part #1-965641-3
TAB HOUSING 2,8 6P

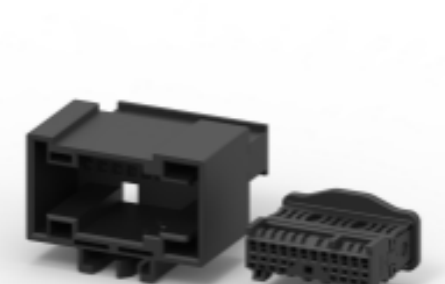

TE Part #CAT-M8793-CH8172
MQS, CONNECTOR HOUSING

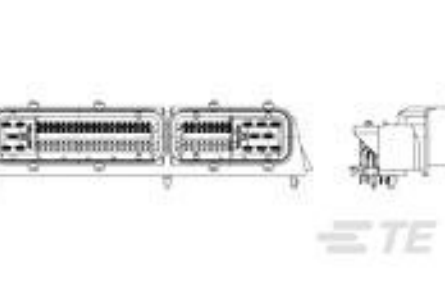

TE Part #1241434-1
121pos hybrid MQS .63 header 90deg



TE Part #185904-2
26pos MQS .63 header 90deg

Documents

- Product Drawings
- 12pos MQS .63 header 90deg
- English
- 12pos MQS .63 header 90deg
- English

- CAD Files
- 3D PDF
- 3D



Customer View Model

[ENG_CVM_CVM_185740-3_O.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_185740-3_O.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_185740-3_O.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

[Product Specification](#)

English