






STANDARD CRIMP

Standardcrimp

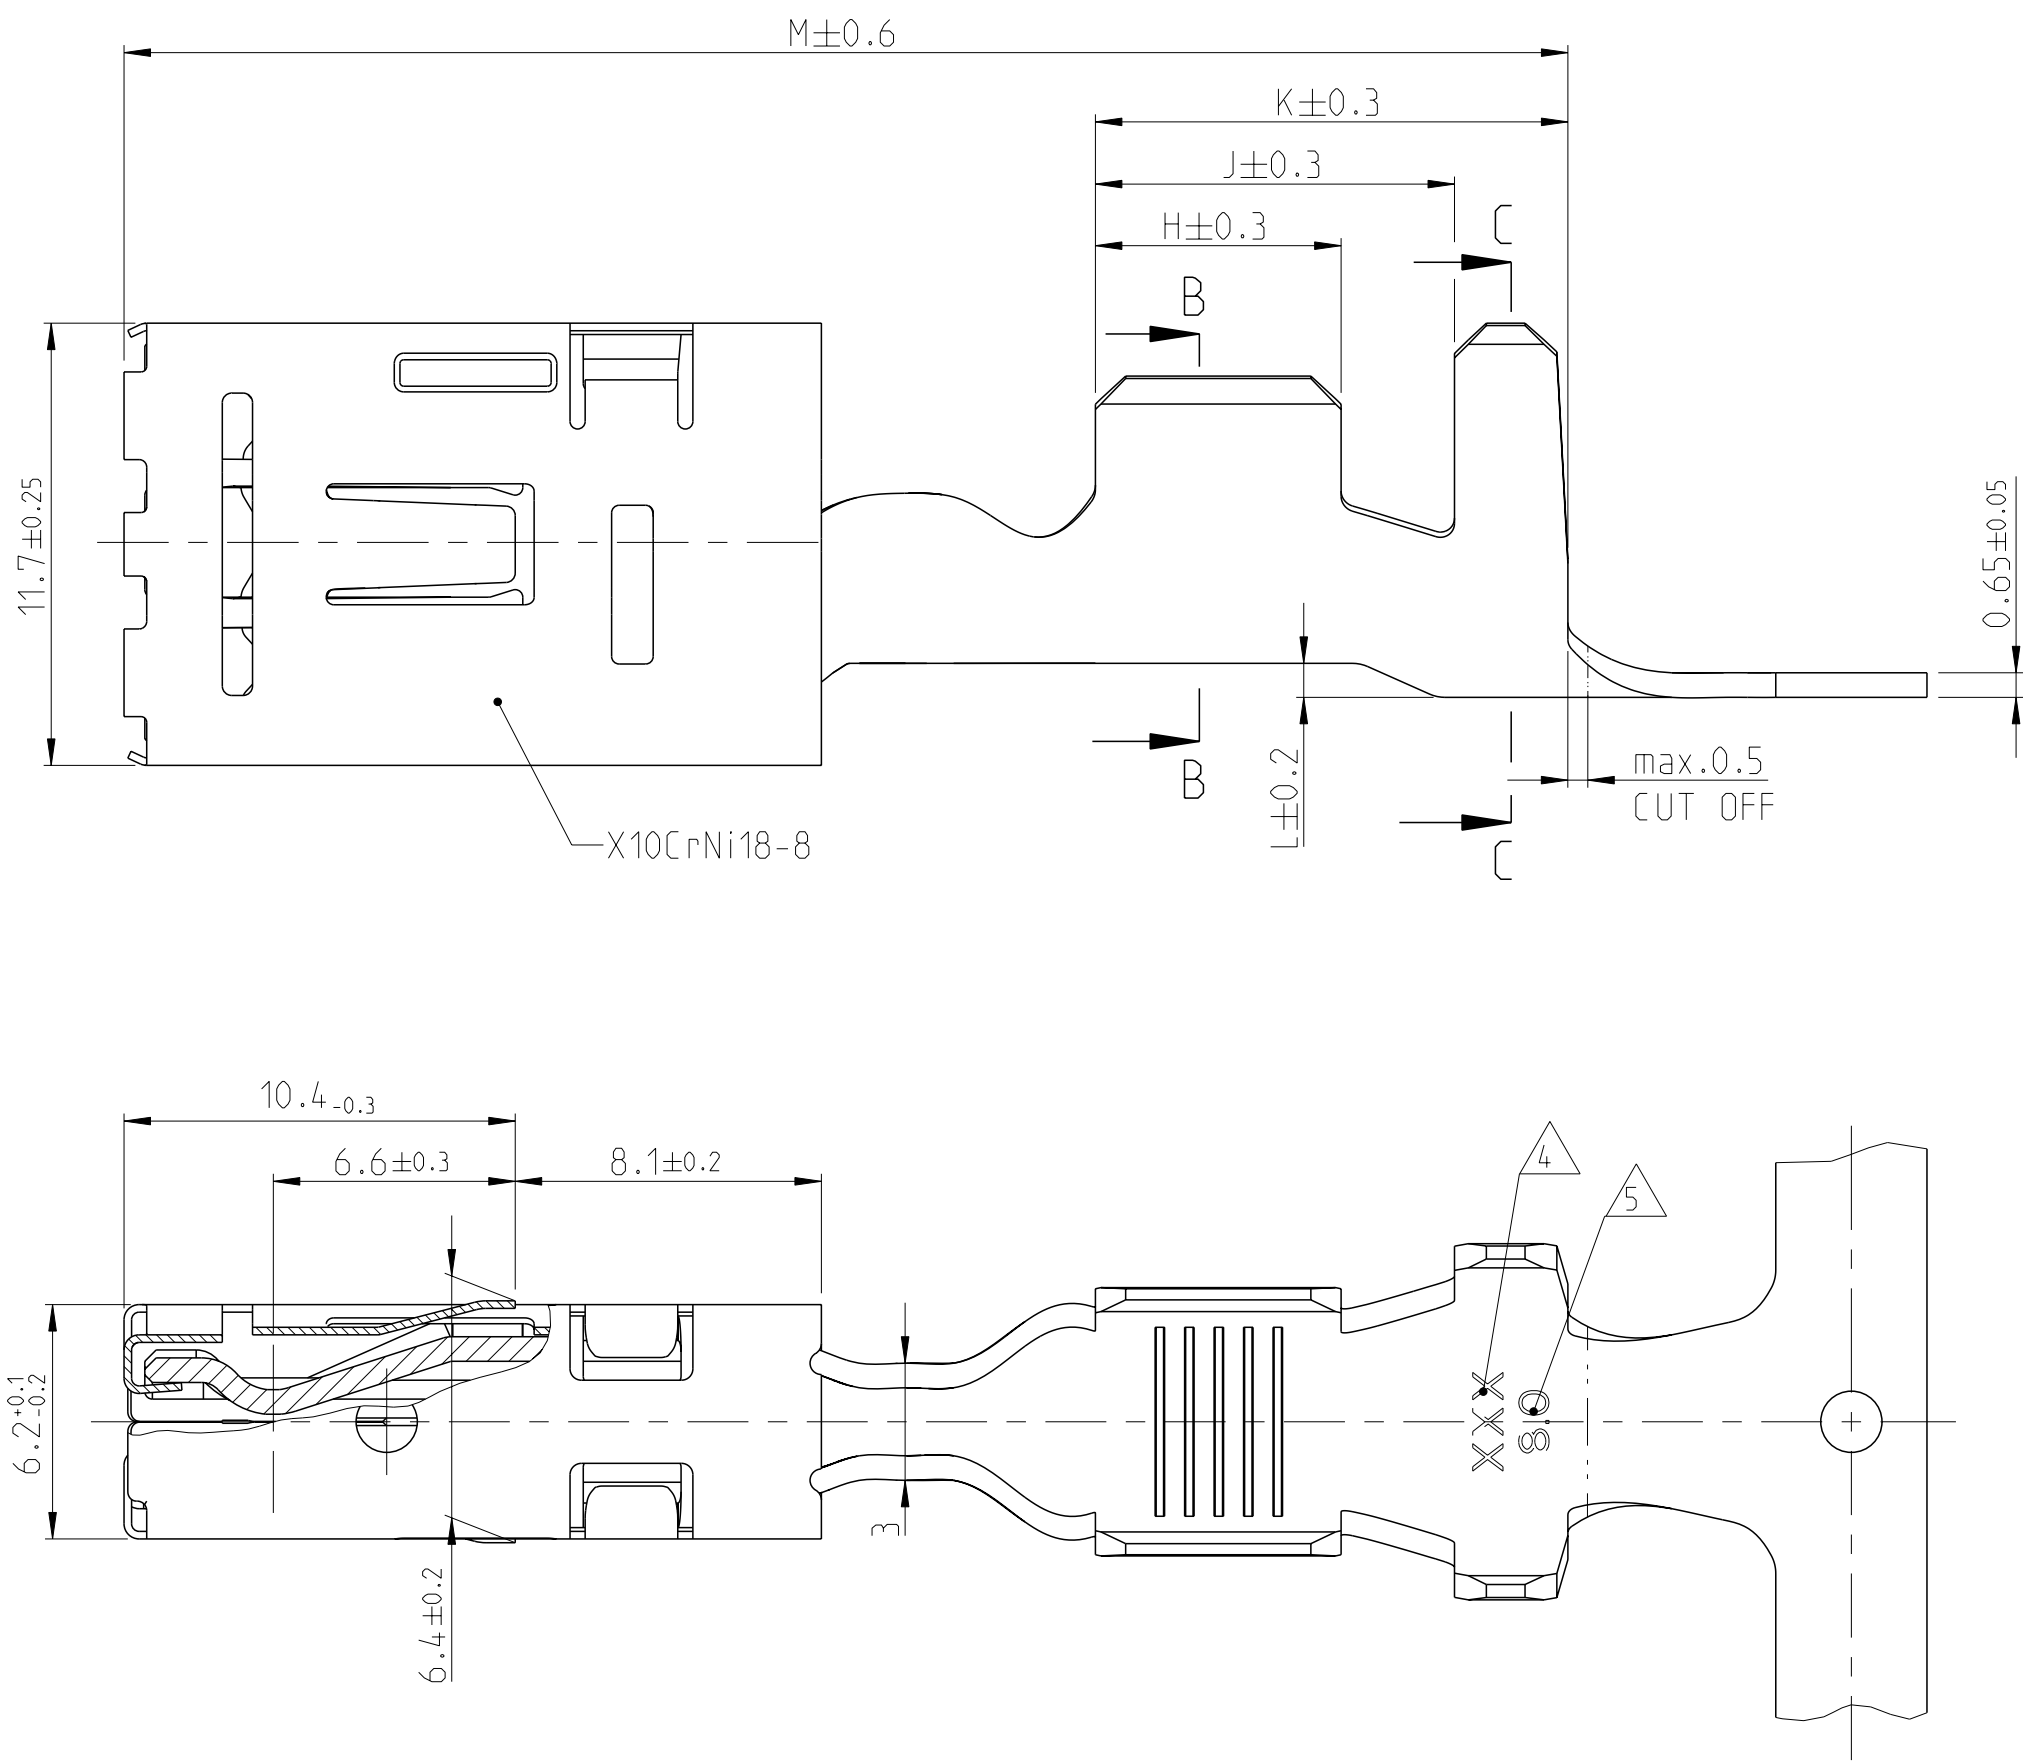

SINGLE WIRE SEAL

Einzeldichtungssystem

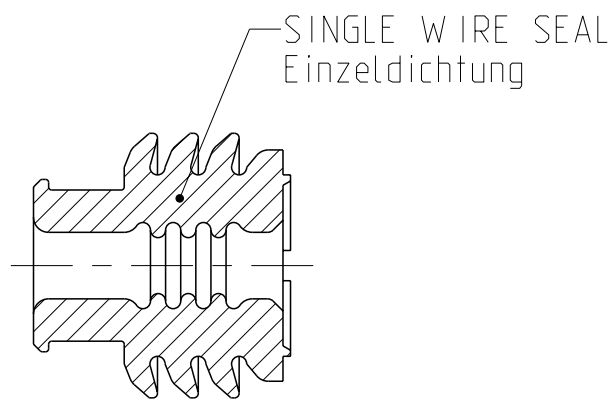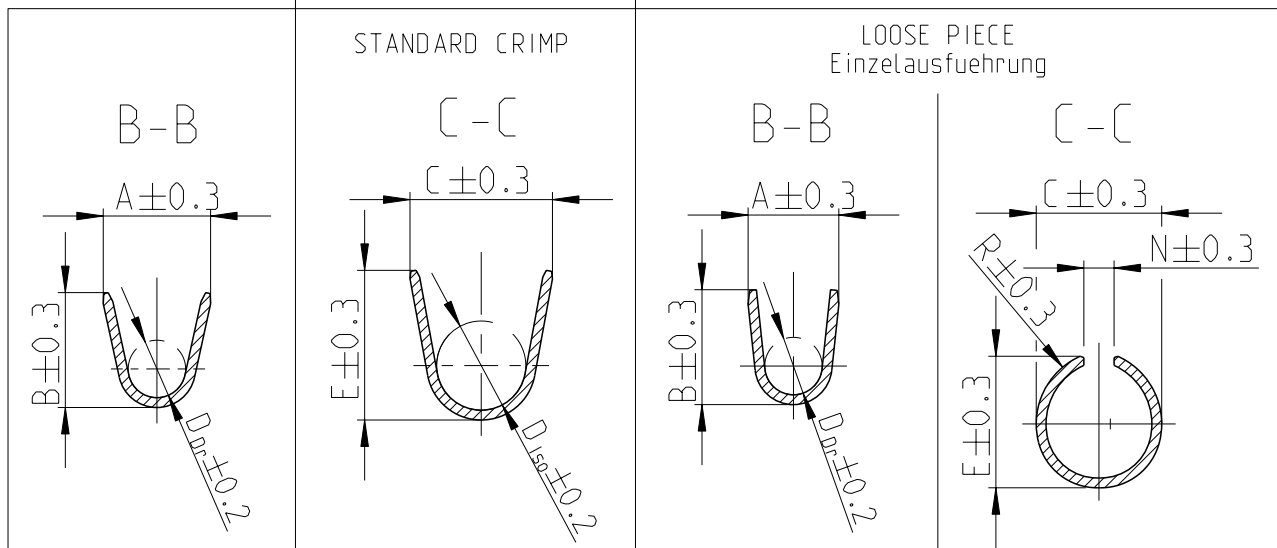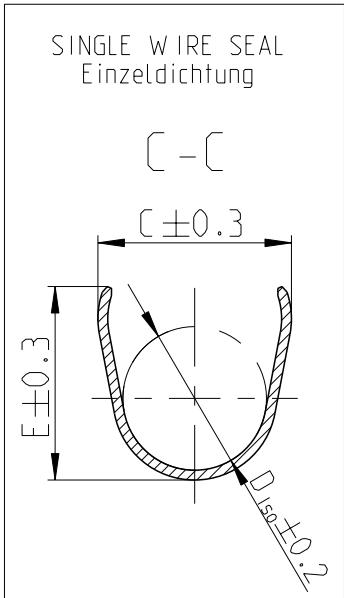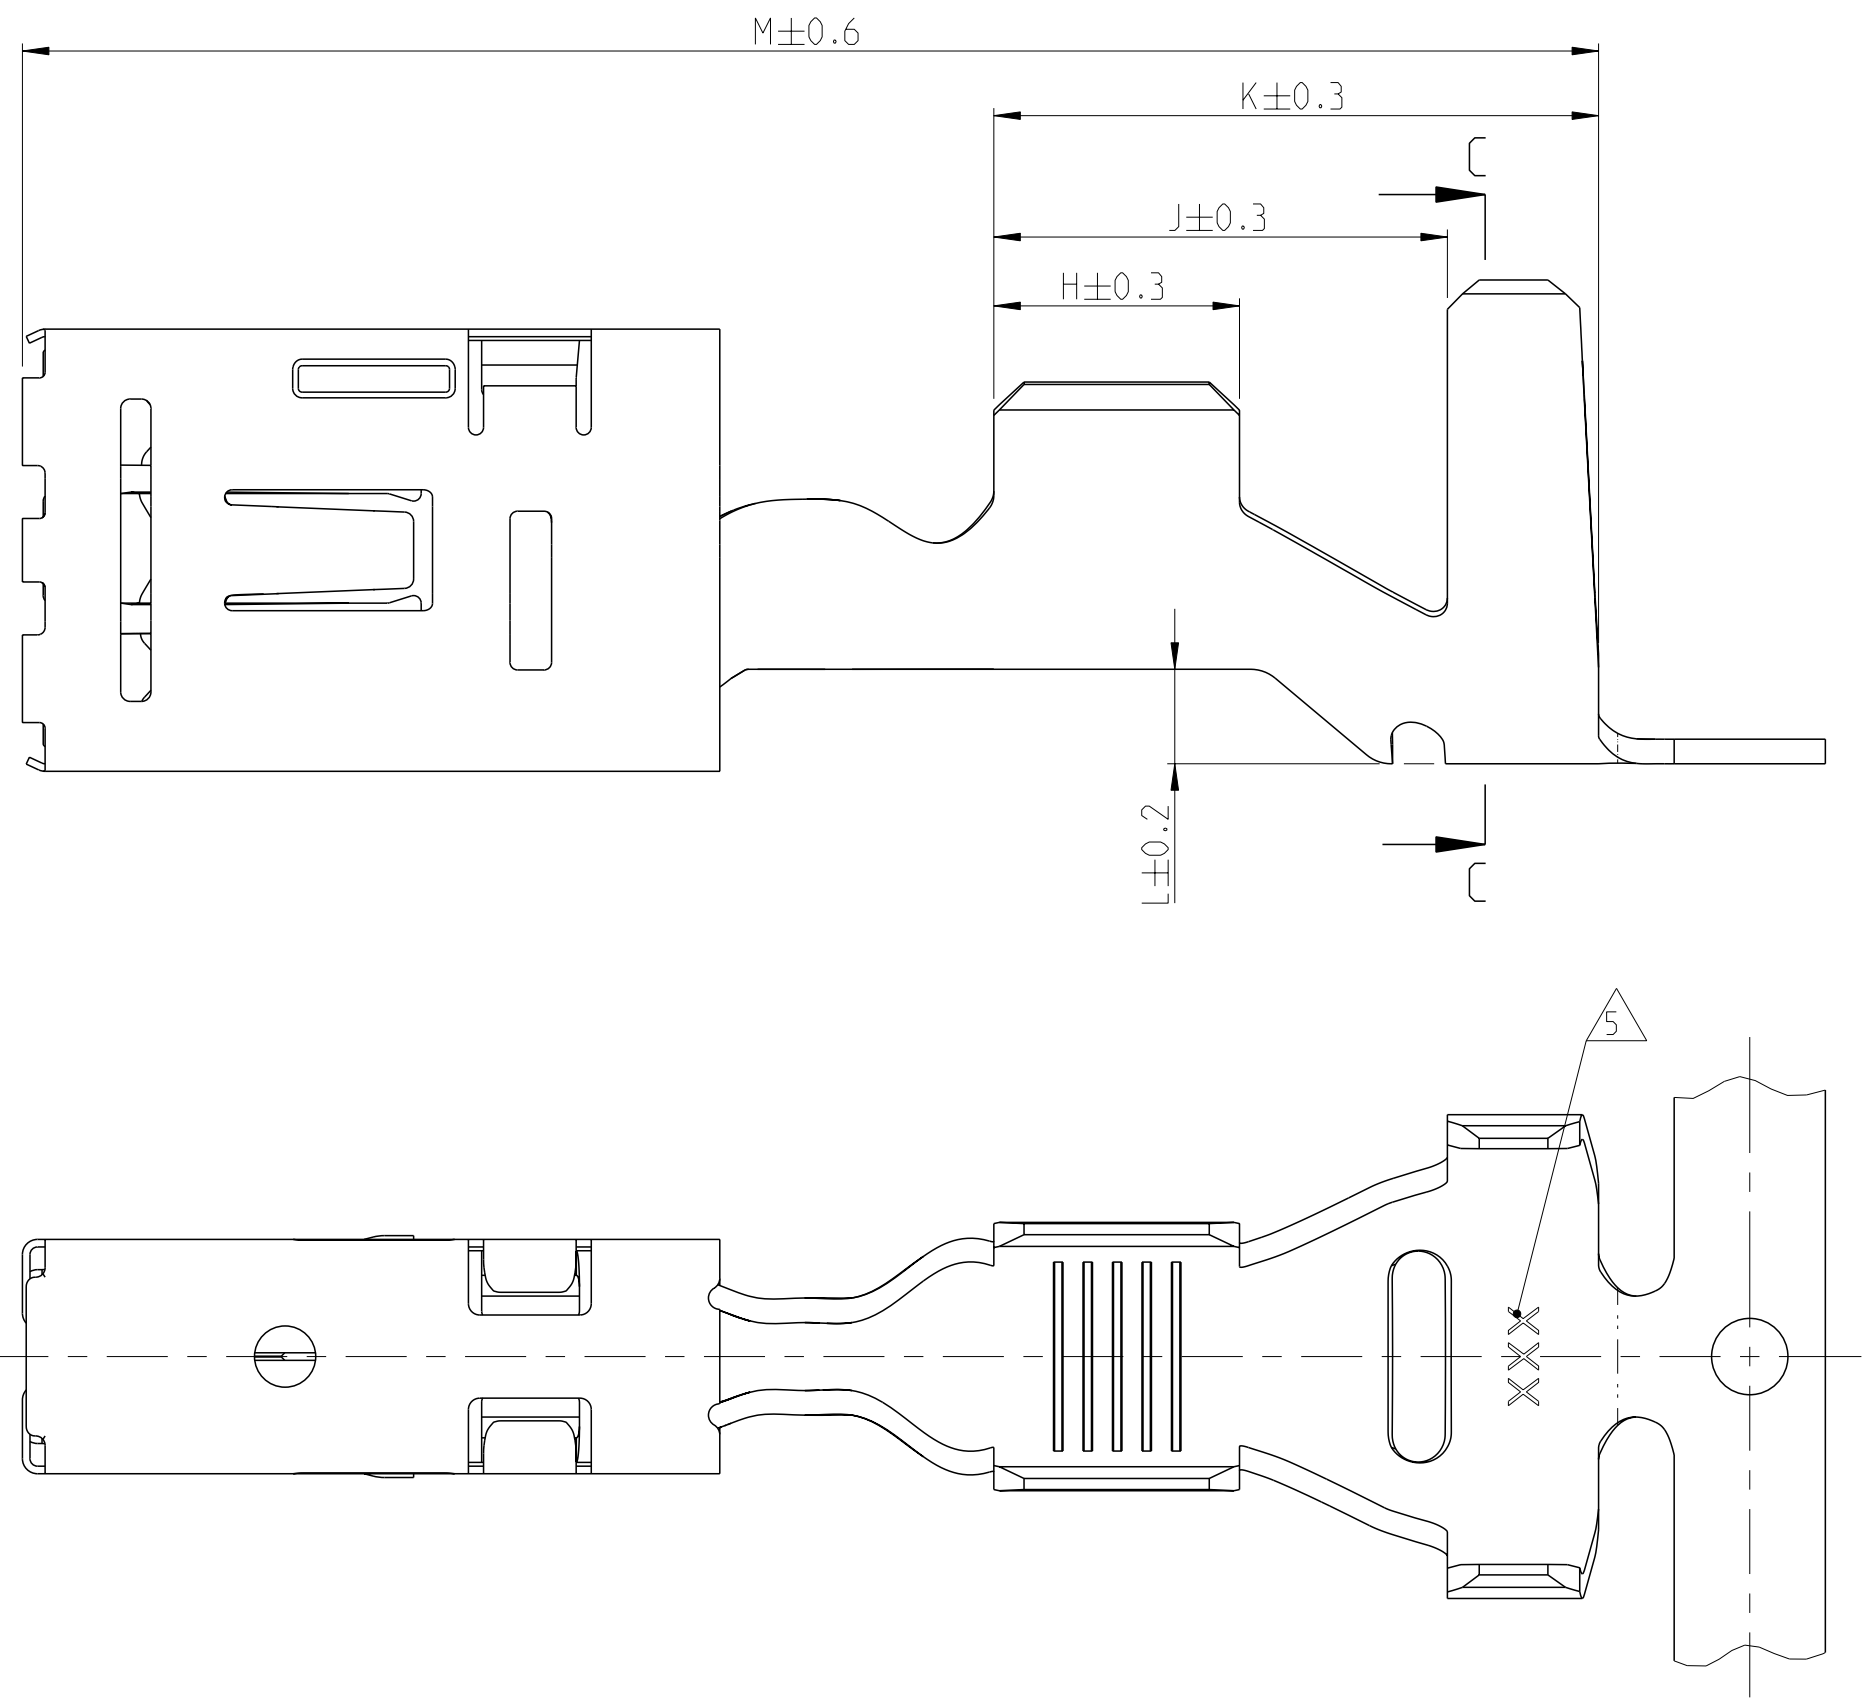

SINGLE WIRE SEAL Einzeldichtung		
1355437-3	16	CLARET RED Weinrot
1355437-2	10	SKY BLUE Himmelblau
1355437-1	6	CLARET VIOLET Bordeauxviolett
ORDER NO. Bestell-Nr.	WIRE SIZE RANGE Drahtgroessenbereich (mm ²)	COLOUR Farbe

1-967591-1	B	-	3	> 10 - 16	7.1 - 7.7	CuNiSi	PRE TIN PLATED vorverzinkt 1 - 3 µm	H = 8.5 J = 13.5 K = 17.0 M = 42.5	A = 8.7 B = 9.1 D _{br} = 5.1	C = 14.4 E = 13.2 D _{iso} = 10.5 L = 2.7	-	-	SINGLE WIRE SEAL Einzeldichtung
1-967590-2	B	1-929152-2	3	6 - 10	4.6 - 6.4	CuNiSi	SILVER PLATED versilbert 3-5 µm (only contact area)	H = 6.5 J = 12.0 K = 16.0 M = 41.7	A = 7.1 B = 7.6 D _{br} = 3.8	C = 12.8 E = 12.8 D _{iso} = 9.5 L = 2.5	A = 6.0 B = 7.6 D _{br} = 3.8	SEE STRIP FORM	
1-967590-1	B	1-929152-1	3				PRE TIN PLATED vorverzinkt 1 - 3 µm	H = 9.5 J = 12.5 K = 16.0 M = 41.7	A = 9.1 B = 9.5 D _{br} = 5.3	C = 12.1 E = 11.7 D _{iso} = 7.6 L = 0.9	A = 7.9 B = 9.5 D _{br} = 5.3	C = 9.7 E = 10.1 R = 5.4 N = 1.8	
1-2177217-1	A	-	2	> 10 - 16	7.1 - 7.7	CuNiSi	PRE TIN PLATED vorverzinkt 1 - 3 µm	H = 9.5 J = 12.5 K = 16.0 M = 41.7	A = 9.1 B = 9.5 D _{br} = 5.3	C = 12.1 E = 11.7 D _{iso} = 7.6 L = 0.9	A = 7.9 B = 9.5 D _{br} = 5.3	C = 9.7 E = 10.1 R = 5.4 N = 1.8	STANDARD CRIMP Standardcrimp
1-967589-2	B	-	3				SILVER PLATED versilbert 3-5 µm (only contact area)	H = 9.5 J = 12.5 K = 16.0 M = 41.7	A = 8.7 B = 9.1 D _{br} = 5.1	C = 11.6 E = 11.9 D _{iso} = 7.1 L = 1.0	-	-	
1-967589-1	B	-	3				PRE TIN PLATED vorverzinkt 1 - 3 µm	H = 9.5 J = 12.5 K = 16.0 M = 41.7	A = 8.7 B = 9.1 D _{br} = 5.1	C = 11.6 E = 11.9 D _{iso} = 7.1 L = 1.0	-	-	
1-967588-2	B	-	3	6 - 10	4.6 - 6.4	CuNiSi	SILVER PLATED versilbert 3-5 µm (only contact area)	H = 6.5 J = 9.5 K = 12.5 M = 38.2	A = 7.1 B = 7.6 D _{br} = 3.8	C = 9.3 E = 9.9 D _{iso} = 5.9 L = 0.9	-	-	
1-967588-1	B	-	3				PRE TIN PLATED vorverzinkt 1 - 3 µm	H = 6.5 J = 9.5 K = 12.5 M = 38.2	A = 7.1 B = 7.6 D _{br} = 3.8	C = 9.3 E = 9.9 D _{iso} = 5.9 L = 0.9	-	-	
1-1241930-1	A	-	2				PRE TIN PLATED vorverzinkt 1 - 3 µm	H = 6.5 J = 9.5 K = 12.5 M = 38.2	A = 7.1 B = 7.6 D _{br} = 3.8	C = 9.3 E = 9.9 D _{iso} = 5.9 L = 0.9	-	-	
1-1719386-1	B	-	2	3 - 6	4.0 - 5.1	CuNiSi	PRE TIN PLATED vorverzinkt 1 - 3 µm	H = 5.5 J = 7.8 K = 10.1 M = 38.2	A = 5.8 B = 6.1 D _{br} = 2.9	C = 7.8 E = 8.0 D _{iso} = 4.6 L = 0.6	-	-	VERSION Ausführung
ORDER NO. Bestell-Nr.	REV.	ORDER NO. Bestell-Nr.	TO BE USED ON TAB THICKNESS Geegnet fuer Flachsteckerdicke	WIRE SIZE RANGE Leiterquerschnitt (mm ²)	INSULATION DIA IsolationsØ (mm)	MATERIAL Werkstoff	SURFACE Oberflaeche	LENGTH Laenge	WIRE CRIMP Drahtcrimp	INSUL. CRIMP Isol.-Crimp	WIRE CRIMP Drahtcrimp	INSUL. CRIMP Isol.-Crimp	VERSION Ausführung
Strip Bandware		LOOSE PIECE Einzelaus- fuhrung						CRIMP DIMENSIONS Crimpabmessungen (mm)			CRIMP DIMENSIONS LOOSE PIECE Crimpabmessungen Einzelausfuhrung (mm)		

- NOTES
- Bemerkungen
- 1 MATING PART SEE TE INTERFACE DRAWING: 114-18317
Gegenstecker nach TE Spezifikation: 114-18317
- 2 TO BE USED ON TAB THICKNESS 0.8±0.05
Geeignet fuer Flachsteckerdicke 0.8±0.05
- 3 TO BE USED ON TAB THICKNESS 1.2±0.05
Geeignet fuer Flachsteckerdicke 1.2±0.05
- 4 BRANDNAME AND REVISION STATUS
Herstellerlogo und Revisionsstand
- 5 IDENTIFICATION FOR 0.8mm VERSION
Kennzeichnung fuer 0.8mm Version

THIS DRAWING IS A CONTROLLED DOCUMENT.				DWN H.Keil 02OCT2000		 TE Connectivity	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: DIN EN ISO 8015		CHK G.v.d.Burgal 02OCT2000			
	0_PLC 1_PLC 2_PLC 3_PLC 4_PLC		±0.2		NAME		PRODUCT GROUP DRAWING FOR AMP MCP 9.5 Tabellenzeichnung fuer AMP MCP 9.5
	ANGLES		±1°		PRODUCT SPEC		
	FINISH				108-18630		
					APPLICATION SPEC		
MATERIAL				114-18269		RESTRICTED TO	
				WEIGHT		-	
				Customer Drawing		-	
				SCALE		2:1	
				SHEET		1 OF 1	
				REV		B7	