



AMPOWER TERMINALS AND SPLICES

Product Facts

- Designed for large cables and leads
- Ideally suited for power generation and distribution
- Accepts a wide range of stranded copper wires (6 AWG to 1000 MCM [13-507 mm²—for terminals and up to 1500 MCM [760 mm²] for splices)
- Available in a variety of terminal and splice styles
- High-quality, seamless tubular copper for maximum conductivity
- Listed by Underwriters Laboratories, Inc. File No. E13288, Spec. 486
- Certified by the Canadian Standards Association File No. LR7189

THE AMPOWER PRODUCT LINE IS AVAILABLE IN A VARIETY OF TERMINAL AND SPLICE STYLES TO SUIT YOUR DESIGN REQUIREMENTS.

AMPOWER terminals and splices are ideally suited for power generation and distribution. This makes electrical equipment subject to continuous operation, such as generators, motors and welders, a perfect application for AMPOWER products. In addition, other applications include interconnections of power supplies to computers and peripheral equipment

Contents

Product Facts	2
Table Listings: mm ² to AWG.....	4
Features.....	5
Terminals	6-10
Splices	10-12
Special Terminals.....	13
Tooling.....	14-15
Part Number Index	16

CRIMP METHOD

Our compression crimping method of terminating electrical wire is an exact science. The application technique is totally mechanical and therefore completely controllable. For this reason it is also uniform from first to last crimp. Variables common to other methods such as melting temperature, flux composition, entrapped gases, heat deformation of conductors, oxidation and the like are eliminated. The termination resulting from this method offers excellent tensile strength and high conductivity.

AMPOWER terminals and splices are made of high quality seamless tubular copper for excellent conductivity. Our special tin plating process inhibits corrosion, and provides trouble-free service. A special die stamping process converts the copper tube into a double thickness rectangular tongue with a short strong transfer section. These factors combine with the formulated AMPOWER terminal crimp to produce excellent conductivity and excellent strength.

SPECIFIED PACKAGING

Wire Size	No. of Terminals Per Package
6 and 4 AWG	100
2 AWG and 1/0 thru 4/0 AWG	50
250-1500 MCM	25

STUD SIZE DIMENSIONS*

Stud Size	Stud Dia.	Stud Hole Dia.
10	0.190 4.83	0.197 5.00
1/4 M6	0.250 6.35	0.265 6.75
5/6 M8	0.312 7.92	0.328 8.33
3/8	0.375 9.53	0.390 9.91
7/16	0.437 11.1	0.453 11.51
1/2 M12	0.500 12.7	0.515 13.08
5/8 M16	0.625 15.88	0.656 16.66
3/4	0.750 19.05	0.781 19.84
7/8 M22	0.875 22.23	0.906 23.01
1	1.000 25.4	1.031 26.19
1 1/8	1.125 28.58	1.156 29.36
1 1/4	1.250 31.75	1.281 32.54

*Use as an aid for the selection of proper terminal size

inches / (mm)

AMPOWER Terminals and Splices

Table Listing: mm² to AWG

OVERVIEW

WIRE SIZES:

mm² to AWG

(American

Wire Gauge)

Wire Sizes	
(mm ²)	(AWG)
13-15	6
21	4
34-35	2
50-60	1/0
67-70	2/0
80-95	3/0
100-125	4/0
127	250 MCM
152	300 MCM
177	350 MCM
203	400 MCM
253	500 MCM
304	600 MCM*
	600 MCM HD*
355	700 MCM*
405	800 MCM*
456	900 MCM*
507	1000 MCM*
634	1250 MCM*
761	1500 MCM*

* Terminals and splices of wire size 600 MCM and above require two crimps for optimum mechanical and electrical performance.

OVERVIEW

Class 2 and Class 5

Wire Sizes

Rigid Stranded Wires (Class 2)	Flexible Wires (Class 5)
Wire Sizes (mm ²)	
10.0	6.0
16.0	10.0
25.0	16.0
35.0	25.0
50.0	35.0
70.0	50.0
95.0	70.0
120.0	95.0
150.0	120.0
185.0	150.0
240.0	185.0
300.0	240.0

AMPOWER Terminals and Splices

Features

1. VERSATILITY

Stranded wires, crimped with the DYNA-CRIMP tool, become almost a homogeneous mass with the AMPOWER terminal or splice barrel. Long barrel terminals and splices are offered for applications where space limitations and accessibility make it difficult to locate the proper crimp area. Complementing this versatility is the stud hole style available with AMPOWER terminals. They are supplied with one, two or without stud holes for special requirements, or they can be ordered with extra long tongues at a slightly higher cost.



Terminals
With Two Stud Holes
See pages 6-10



Standard Terminals
With One Stud Hole
See pages 6-10



Standard Terminals
Without Stud Hole
See pages 6-10



Long Barrel Terminal
Without Stud Hole
See pages 6-10



Parallel Splice
See page 12



Butt Splice
See page 11



Long Barrel
Butt Splice
See page 10

2. STRENGTH

AMPOWER terminals have formidable strength and resistance to vibration suitable for their intended use. This strength comes from the double-thick tongue and short transfer section of the barrel, and is achieved without sacrificing any current carrying capacity. In addition, great tensile strength is imparted to the AMPOWER terminals and splices by means of AMP's formulated "C" crimp-tensile strength approaches the strength of the conductors.

3. ECONOMY

An important part of all AMP products is low installed cost. This is a result of the tool and terminal team, the elimination of clutter found in other methods, plus the speed and ease of application. And AMP's matching tooling creates the correct crimp. As a result, you save money every time an AMPOWER product is installed.

4. CONDUCTIVITY, CORROSION RESISTANCE AND TEMPERATURE RISE

The center of the AMP termination method is the exactly controlled "C" crimp that forms the terminal or splice barrel into an almost homogeneous unit. As a result, conductivity is maximized and tensile strength approaches that of the wire. Proper compression crimping brings the terminal into intimate contact with the conductor, producing excellent resistance to corrosion. Tests of temperature rise above ambient also confirm the excellent performance of AMPOWER terminals and splices.

5. POSITIVE INSPECTION

Standard AMPOWER terminals and splices are supplied with inspection slots in the barrel, allowing the tool operator or inspector to determine at a glance whether the conductors have been fully and properly inserted into the barrel. This can be done either before or after crimping. Wire stops prevent over insertion of conductors, and bell mouth construction makes it easy to insert conductors into the barrel.

6. BROAD WIRE SIZE RANGE

Covering wire sizes from 6 AWG to 1000 MCM [13 to 507 mm²]-for terminals and up to 1500 [760 mm²] for splices. AMPOWER terminals and splices provide reliability and low cost installation for power equipment using large cable sizes.

Note: See page 13 for Special Terminals.


AMPOWER Terminals and Splices

Terminals

BASE MATERIAL:

Annealed Copper
(ASTM B-188)²

Electrodeposited
Tin Plate
(MIL-T-10727)

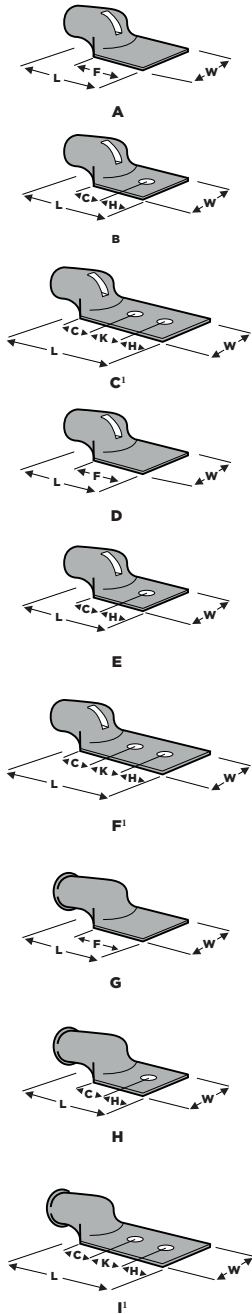

Wire Size	Wire Range	Barrel I.D. Min.	Tongue Thickness Max.	Style	Stud Size	Dimensions						Part Number
						L Max.	H Max.	C Min.	K	F Min.	W Max.	
6 AWG ² 13-15 mm ²	20,800-33,100 CM	0.219 5.56	0.08 2.03	B	10	1.41 35.81	0.32 8.13	0.42 10.67	-	-	0.69 17.53	328141
				B	1/4 M6	1.41 35.81	0.32 8.13	0.42 10.67	-	-	0.69 17.53	328142
				B	5/16 M8	1.41 35.81	0.32 8.13	0.42 10.67	-	-	0.69 17.53	328143
				B	3/8	1.41 35.81	0.32 8.13	0.42 10.67	-	-	0.69 17.53	328144
				B	1/2 M12	1.43 36.32	0.38 9.65	0.43 10.92	-	-	0.77 19.56	328158
4 AWG ² 21 mm ²	33,100-52,600 CM	0.275 6.99	0.08 2.03	A	-	1.41 35.81	-	-	-	0.74 18.80	0.69 17.53	328160
				B	1/4 M6	1.41 35.81	0.32 8.13	0.42 10.67	-	-	0.69 17.53	328162
				B	5/16 M8	1.41 35.81	0.32 8.13	0.42 10.67	-	-	0.69 17.53	328163
				B	3/8	1.41 35.81	0.32 8.13	0.42 10.67	-	-	0.69 17.53	328164
				B	1/2 M12	1.46 37.08	0.40 10.16	0.43 10.92	-	-	0.77 19.56	328178
2 AWG 34-35 mm ²	52,600-83,700 CM	0.362 9.19	0.09 2.29	A	-	1.62 41.15	-	-	-	0.82 20.83	0.71 18.03	325200
				B	1/4 M6	1.62 41.15	0.34 8.64	0.50 12.70	-	-	0.71 18.03	325201
				B	5/16 M8	1.62 41.15	0.34 8.64	0.50 12.70	-	-	0.71 18.03	325202
				B	3/8	1.62 41.15	0.34 8.64	0.50 12.70	-	-	0.71 18.03	325203
				A	-	2.62 66.55	-	-	-	1.83 46.48	0.71 18.03	325207
				B	1/2 M12	1.70 43.18	0.41 10.41	0.50 12.70	-	-	0.78 19.81	325250
				C	3/8	2.63 66.80	0.34 8.64	0.50 12.70	1.00 25.40	-	0.71 18.03	326799
1/0 AWG 50-60 mm ²	83,700-119,500 CM	0.485 11.63	0.10 2.54	A	-	1.97 50.04	-	-	-	1.03 26.16	0.87 22.10	325300
				A	-	3.05 77.47	-	-	-	2.03 51.56	0.87 22.10	325308
				G	-	4.25 107.70	-	-	-	2.83 71.88	0.87 22.10	325318
				B	1/4 M6	1.97 50.04	0.42 10.67	0.62 15.75	-	-	0.87 22.10	325301
				B	5/16 M8	1.97 50.04	0.42 10.67	0.62 15.75	-	-	0.87 22.10	325302
				B	3/8	1.97 50.04	0.42 10.67	0.62 15.75	-	-	0.87 22.10	325303
				B	7/16	1.97 50.04	0.42 10.67	0.62 15.75	-	-	0.87 22.10	325304
				C	5/16 M8	2.94 74.68	0.42 10.67	0.62 15.75	-	-	0.87 22.10	328169
				B	1/2 M12	1.97 50.04	0.42 10.67	0.62 15.75	-	-	0.87 22.10	325305
				C	3/8	2.98 75.69	0.42 10.67	0.62 15.75	1.00 25.40	-	0.87 22.10	326800
				I	1/2 M12	4.27 108.46	0.42 10.67	0.62 15.75	1.75 44.45	-	0.87 22.10	53680-2

¹ Per NEMA specification.

² Terminals for wire sizes 6 AWG and 4 AWG are manufactured from annealed copper per ASTM B-152.

inches / (mm)

Dimensions displayed in **inches** / mm unless otherwise specified and are shown for reference purposes only. Specifications subject to change.


AMPOWER Terminals and Splices

Terminals (continued)

BASE MATERIAL:

Annealed Copper
(ASTM B-188)

Electrodeposited
Tin Plate
(MIL-T-10727)

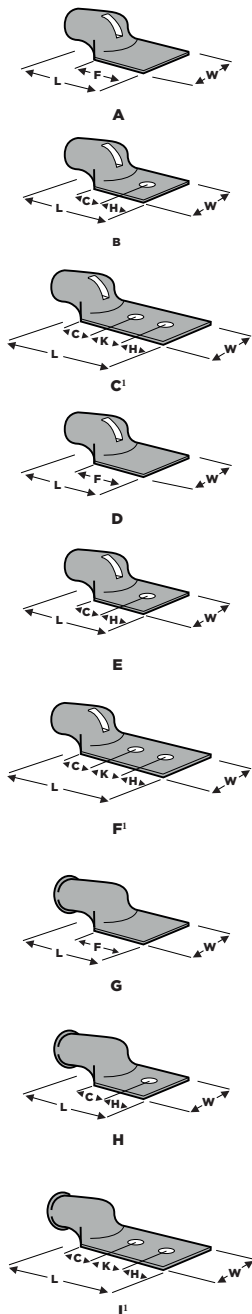

Wire Size	Wire Range	Barrel I.D. Min.	Tongue Thickness Max.	Style	Stud Size	Dimensions						Part Number
						L Max.	H Max.	C Min.	K	F Min.	W Max.	
2/0 AWG 67-70 mm ²	119,500-150,500 CM	0.513 13.03	0.11 2.79	B	1/4 M6	2.11 53.59	0.47 11.94	0.62 15.75	-	-	0.97 24.64	325401
				B	5/16 M8	2.11 53.59	0.47 11.94	0.62 15.75	-	-	0.97 24.64	325402
				C	5/16 M8	3.02 76.71	0.42 10.67	0.88 22.35	0.687 17.45	-	0.97 24.64	50990
				C	5/16 M8	2.50 63.50	0.32 8.13	0.50 12.70	0.687 17.45	-	0.97 24.64	55992-1
				B	3/8 -	2.11 53.59	0.47 11.94	0.62 15.75	-	-	0.97 24.64	325403
				B	1/2 M12	2.11 53.59	0.47 11.94	0.62 15.75	-	-	0.97 24.64	325405
				A	-	3.86 98.04	-	-	-	2.83 71.88	0.97 24.64	325406
				C	3/8 -	3.12 79.25	0.47 11.94	0.62 15.75	1.00 25.40	-	0.97 24.64	326801
				H	3/8 -	2.72 69.09	0.47 11.94	0.62 15.75	-	-	0.97 24.64	325410
				I	1/2 M12	4.47 113.54	0.47 11.94	0.62 15.75	1.75 44.45	-	0.97 24.64	53681-2
3/0 AWG 80-95 mm ²	150,500-190,000 CM	0.576 14.63	0.12 3.05	B	5/16 M8	2.26 57.40	0.52 13.21	0.62 15.75	-	-	1.08 27.43	325502
				B	3/8 -	2.26 57.40	0.52 13.21	0.62 15.75	-	-	1.08 27.43	325503
				B	1/2 M12	2.26 57.40	0.52 13.21	0.62 15.75	-	-	1.08 27.43	325505
				A	-	4.02 102.11	-	-	-	2.89 73.41	1.08 27.43	325508
				C	5/16 M8	3.27 83.05	0.52 13.21	0.62 15.75	1.00 25.40	-	1.08 27.43	325516
				I	1/2 M12	4.69 119.13	0.52 13.21	0.62 15.75	1.75 44.45	-	1.08 27.43	53682-2
				C	3/8 -	3.27 83.05	0.52 13.21	0.62 15.75	1.00 25.40	-	1.08 27.43	326802
				A	-	2.45 62.23	-	-	-	1.19 30.23	1.19 30.23	325600
4/0 AWG 100-125 mm ²	190,000-231,000 CM	0.648 16.46	0.13 3.30	B	5/16 M8	2.45 62.23	0.59 14.99	0.62 15.75	-	-	1.19 30.23	325602
				B	3/8 -	2.45 62.23	0.59 14.99	0.62 15.75	-	-	1.19 30.23	325603
				B	3/8 -	2.45 62.23	0.59 14.99	0.62 15.75	-	-	1.19 30.23	325602-2**
				B	1/2 M12	2.45 62.23	0.59 14.99	0.62 15.75	-	-	1.19 30.23	325605
				C	3/8 -	3.46 87.88	0.59 14.99	0.62 15.75	1.00 25.40	-	1.19 30.23	326803
				A	-	4.21 106.93	-	-	-	2.95 74.93	1.19 30.23	325610
				A	-	3.46 87.88	-	-	-	2.20 55.88	1.19 30.23	325611
				G	-	4.94 125.48	-	-	-	2.95 74.93	1.19 30.23	325614
				C	1/2 M12	4.21 106.93	0.59 14.99	0.62 15.75	1.75 44.45	-	1.19 30.23	327284
				I	1/2 M12	4.94 125.48	0.59 14.99	0.62 15.75	1.75 44.45	-	1.19 30.23	53683-2

** No sight hole.

¹ Per NEMA specification.

inches / (mm)

Dimensions displayed in **inches** / mm unless otherwise specified and are shown for reference purposes only. Specifications subject to change.


AMPOWER Terminals and Splices

Terminals (continued)

BASE MATERIAL:

Annealed Copper
(ASTM B-188)

Electrodeposited
Tin Plate
(MIL-T-10727)

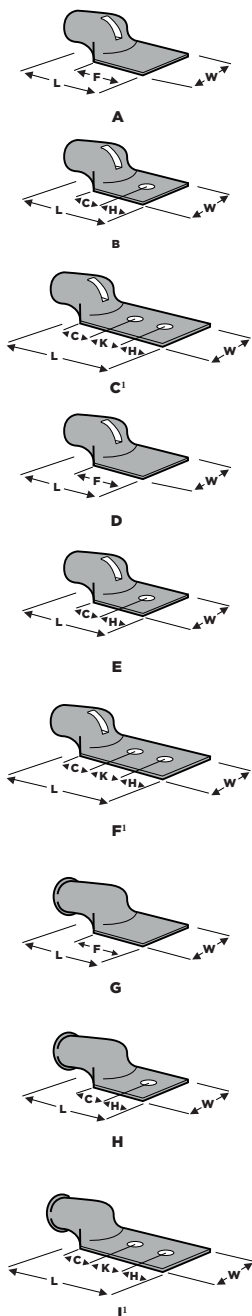

Wire Size	Wire Range	Barrel I.D. Min.	Tongue Thickness Max.	Style	Stud Size	Dimensions						Part Number
						L Max.	H Max.	C Min.	K	F Min.	W Max.	
250 MCM 127mm ²	231-275 MCM	0.690 17.53	0.15 3.81	B	5/16 M8	2.58 65.53	0.63 16.00	0.62 15.75	-	-	1.28 32.51	325702
				B	3/8 -	2.58 65.53	0.63 16.00	0.62 15.75	-	-	1.28 32.51	325703
				B	1/2 M12	2.58 65.53	0.63 16.00	0.62 15.75	-	-	1.28 32.51	325705
				B	5/8 -	2.70 68.57	0.63 16.00	0.75 19.05	-	-	1.28 32.51	325707
				A	-	2.89 73.41	-	-	-	1.54 39.12	1.28 32.51	325708
				A	-	4.84 122.94	-	-	-	3.49 88.65	1.28 32.51	325712
				A	-	4.84 122.94	-	-	-	3.49 88.65	1.28 32.51	1-325712-3*
				G	-	5.63 143.	-	-	-	3.54 89.92	1.28 32.51	325719
				C	3/8 -	3.59 91.19	0.63 16.00	0.62 15.75	1.00 25.40	-	1.28 32.51	326804
				C	1/2 M12	4.34 110.24	0.63 16.00	0.62 15.75	1.75 44.45	-	1.28 32.51	327285
300 MCM 152mm ²	275-325 MCM	0.758 19.25	0.16 4.06	C	5/16 M8	3.58 90.93	0.63 16.00	0.62 15.75	.875 22.23	-	1.38 35.05	276917-1
				B	5/16 M8	2.69 68.33	0.63 16.00	0.62 15.75	-	-	1.40 32.56	325802
				B	3/8 -	2.69 68.33	0.63 16.00	0.62 15.75	-	-	1.40 32.56	325803
				B	3/8 -	2.69 68.33	0.63 16.00	0.62 15.75	-	-	1.40 32.56	325803-1**
				B	1/2 M12	2.69 68.33	0.63 16.00	0.62 15.75	-	-	1.40 32.56	325805
				B	1/2 M12	2.69 68.33	0.63 16.00	0.62 15.75	-	-	1.40 32.56	325805-1**
				A	-	2.82 71.63	-	-	-	1.37 34.80	1.40 32.56	2-325806-2*
				B	5/8 -	2.82 71.63	0.63 16.00	0.75 19.05	-	-	1.40 32.56	325807
				C	3/8 -	3.70 93.98	0.63 16.00	0.62 15.75	1.00 25.40	-	1.40 32.56	326805
				C	3/8 -	3.70 93.98	0.63 16.00	0.62 15.75	1.00 25.40	-	1.40 32.56	326805-1**
				C	1/2 M12	4.43 112.52	0.63 16.00	0.62 15.75	1.75 44.45	-	1.40 32.56	327286
				B	3/8 -	2.42 61.47	0.41 10.41	0.62 15.75	-	-	1.40 32.56	325814
				C	3/8 -	4.51 114.55	0.63 16.00	0.62 15.75	1.00 25.4	-	1.40 32.56	55993-1
				A	-	5.15 130.81	-	-	-	3.70 93.98	1.40 32.56	325816
				G	-	6.01 152.65	-	-	-	3.70 93.98	1.40 32.56	325821
				I	1/2 M12	5.25 133.35	0.62 15.49	0.62 15.75	1.75 44.45	-	1.40 32.56	53684-2

**Cleaned but not plated.

**No sight hole.

¹ Per NEMA specification.

inches / (mm)

Dimensions displayed in **inches** / mm unless otherwise specified and are shown for reference purposes only. Specifications subject to change.


AMPOWER Terminals and Splices

Terminals (continued)

BASE MATERIAL:

Annealed Copper
(ASTM B-188)

Electrodeposited
Tin Plate
(MIL-T-10727)

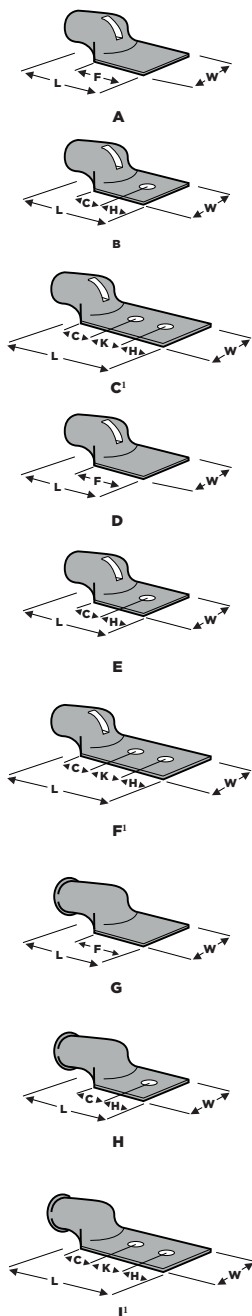

Wire Size	Wire Range	Barrel I.D. Min.	Tongue Thickness Max.	Style	Stud Size	Dimensions						Part Number
						L Max.	H Max.	C Min.	K	F Min.	W Max.	
350 MCM 177mm ²	325-375 MCM	0.819 20.80	0.17 4.32	A	-	4.54 115.32	-	-	-	3.00 76.20	1.51 38.35	325917
				B	1/2 M12	4.06 103.12	0.54 13.72	0.71 18.03	1.25 31.75	-	1.51 38.35	325926-1**
				A	-	2.86 72.64	-	-	-	1.41 35.81	1.51 38.35	325956*
				B	3/8 -	2.79 70.87	0.63 16.00	0.62 15.75	-	-	1.51 38.35	325903
				B	1/2 M12	2.79 70.87	0.63 16.00	0.62 15.75	-	-	1.51 38.35	325905
				B	1/2 M12	2.79 70.87	0.63 16.00	0.62 15.75	-	-	1.51 38.35	325905-1**
				A	-	2.91 73.91	-	-	-	1.42 36.07	1.51 38.35	325906
				C	3/8 -	3.79 96.27	0.63 16.00	0.62 15.75	1.00 25.40	-	1.51 38.35	326806
				C	3/8 -	3.79 96.27	0.63 16.00	0.62 15.75	1.00 25.40	-	1.51 38.35	326806-1**
				C	1/2 M12	4.55 115.57	0.63 16.00	0.62 15.75	1.75 44.45	-	1.51 38.35	327287
				I	1/2 M12	5.47 138.94	0.63 16.00	0.62 15.75	1.75 44.45	-	1.51 38.35	53641-2
				B	3/8 -	2.89 73.41	0.63 16.00	0.62 15.75	-	-	1.61 40.89	326003
				B	1/2 M12	2.89 73.41	0.63 16.00	0.62 15.75	-	-	1.61 40.89	326005
				B	1/2 M12	2.89 73.41	0.63 16.00	0.62 15.75	-	-	1.61 40.89	326005-2**
				B	5/8 M16	3.01 76.45	0.63 16.00	0.75 19.05	-	-	1.61 40.89	326007
400 MCM 203mm ²	375-450 MCM	0.876 22.25	0.18 4.57	A	-	3.59 91.19	-	-	-	1.99 50.55	1.61 40.89	1-326012-2*
				A	-	4.88 123.95	-	-	-	3.24 82.30	1.61 40.89	326016
				C	3/8 -	3.90 99.06	0.63 16.00	0.62 15.75	1.00 25.40	-	1.61 40.89	326807
				G	-	5.87 149.10	-	-	-	3.21 81.53	1.61 40.89	326021
				H	5/8 M16	4.00 101.60	0.63 16.00	0.75 19.05	-	-	1.61 40.89	326020
				B	3/8 -	3.29 83.57	0.76 19.30	0.75 19.05	-	-	1.80 45.72	326103
				B	1/2 M12	3.29 83.57	0.76 19.30	0.75 19.05	-	-	1.80 45.72	326105
				B	5/8 M16	3.29 83.57	0.76 19.30	0.75 19.05	-	-	1.80 45.72	326106
				A	-	3.43 87.12	-	-	-	1.68 42.67	1.80 45.72	326107-1*
				A	-	3.79 96.27	-	-	-	2.04 51.82	1.80 45.72	2-326111-1*
500 MCM 253mm ²	450-550 MCM	0.981 24.92	0.20 5.08	A	-	5.00 127.00	-	-	-	3.25 82.55	1.80 45.72	326117
				C	1/2 M12	4.80 121.92	0.61 15.49	0.62 15.75	1.75 44.45	-	1.80 45.72	327289
				C	3/8 -	4.05 102.87	0.63 16.00	0.62 15.75	1.00 25.40	-	1.80 45.72	326808
				G	-	6.08 154.43	-	-	-	3.20 81.28	1.80 45.72	326123
				I	1/2 M12	5.88 149.35	0.63 16.00	0.62 15.75	1.75 44.45	-	1.80 45.72	53642-2
				B	3/8 -	3.29 83.57	0.76 19.30	0.75 19.05	-	-	1.80 45.72	326103
				B	1/2 M12	3.29 83.57	0.76 19.30	0.75 19.05	-	-	1.80 45.72	326105
				B	5/8 M16	3.29 83.57	0.76 19.30	0.75 19.05	-	-	1.80 45.72	326106

**Cleaned but not plated.

**No sight hole.

¹ Per NEMA specification.

inches / (mm)

Dimensions displayed in **inches** / mm unless otherwise specified and are shown for reference purposes only. Specifications subject to change.

AMPOWER Terminals and Splices

Terminals (continued) and Splices

BASE

MATERIAL:

Annealed Copper
(ASTM B-188)

Electrodeposited
Tin Plate
(MIL-T-10727)

Note: Refer to art
on facing page

Wire Size	Wire Range	Barrel I.D. Min.	Tongue Thickness Max.	Style	Stud Size	Dimensions						Part Number
						L Max.	H Max.	C Min.	K	F Min.	W Max.	
600 ² MCM 304mm ²	500-650 MCM	1.075 27.31	0.22 5.59	F	1/2 M12	4.46 113.28	0.54 13.72	0.71 18.03	1.25 31.75	-	1.95 49.53	276916-1
				D	-	4.02 102.11	-	-	-	2.12 53.85	1.95 49.53	1-326211-1
				G	-	6.28 159.51	-	-	-	3.25 82.55	1.95 49.53	326222
				F	3/8 -	4.22 107.19	0.63 16.00	0.62 15.75	1.00 25.40	-	1.95 49.53	326809-1**
				F	1/2 M12	4.97 126.24	0.63 16.00	0.62 15.75	1.75 44.45	-	1.95 49.53	327290
				F	1/2 M12	4.97 126.24	0.63 16.00	0.62 15.75	1.75 44.45	-	1.95 49.53	327290-1**
700 ² MCM 355mm ²	650-750 MCM	1.162 29.51	0.24 6.10	E	1/2 M12	3.59 91.19	0.76 19.30	0.75 19.05	-	-	2.12 53.85	326305
				I	1/2 M12	6.35 161.29	0.63 16.00	0.62 15.75	1.75 44.45	-	2.12 53.85	53686-2
800 ² MCM 405mm ²	750-850 MCM	1.242 31.55	0.25 6.35	E	1/2 -	3.72 94.49	0.76 19.30	0.75 19.05	-	-	2.26 57.40	326405
				E	5/8 M12	3.72 94.49	0.76 19.30	0.75 19.05	-	-	2.26 57.40	326406
				D	-	4.47 113.54	-	-	-	2.24 56.90	2.26 57.40	2-326413-1*
				F	1/2 M12	5.23 132.84	0.63 16.00	0.62 15.75	1.75 44.45	-	2.26 57.40	327292
1000 ² MCM 507mm ²	950-1125 MCM	1.390 35.31	0.28 7.11	F	1/2 M12	5.63 143.00	0.63 16.00	0.81 20.57	1.75 44.45	-	2.51 63.75	327294

**Cleaned but not plated.

**No sight hole.

² Two crimps necessary.

inches / (mm)

Splices

Long Barrel Butt Splice

WIRE SIZE RANGE:

1/0 AWG to
500 MCM (50
to 253 mm²)

BASE


MATERIAL:

Annealed Copper
(ASTM B-188)

Electrodeposited
Tin Plate
(MIL-T-10727)

Wire Size	Wire Range	Barrel I.D. Min.	Dimensions		Part Number
			T	L Max.	
1/0 AWG	83,700-119,500 CM	0.468 11.89	0.042 1.07	2.42 61.47	53081
4/0 AWG	190-231 MCM	0.658 16.71	0.059 1.50	3.24 82.30	53084
250 MCM	231-275 MCM	0.700 17.78	0.065 1.65	3.51 89.15	53085
350 MCM	325-378 MCM	0.829 21.06	0.077 1.96	4.06 103.12	53087
400 MCM	375-450 MCM	0.886 22.50	0.083 2.11	4.34 110.24	53088
500 MCM	450-550 MCM	0.991 25.17	0.092 2.34	4.75 120.65	53089

inches / (mm)

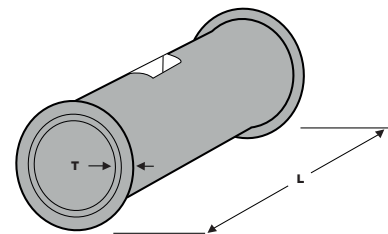

Dimensions displayed in **inches** / mm unless otherwise specified and are shown for reference purposes only. Specifications subject to change.

AMPOWER Terminals and Splices

Splices (continued)

Butt Splice

WIRE SIZE

RANGE:

2 AWG to 1000 MCM
(34 to 507mm²)

BASE MATERIAL:

Annealed Copper
(ASTM B-188)


Electrodeposited
Tin Plate
(MIL-T-10727)

Wire Size	Wire Range	Barrel I.D. Min.	Dimensions		Part Number
			T	L Max.	
2 AWG	52,600-83,700 CM	0.372 9.45	0.039 0.99	1.05 26.67	324457
1/0 AWG	83,700-119,500 CM	0.468 11.89	0.042 1.07	1.24 31.50	324458
2/0 AWG	119,500-150,500 CM	0.523 13.28	0.047 1.19	1.38 35.05	324459
3/0 AWG	150,500-190,000 CM	0.586 14.88	0.053 1.35	1.52 38.61	324460
3/0 AWG	150,500-190,000 CM	0.586 14.88	0.053 1.35	1.77 44.96	1-324460-3
4/0 AWG	190-231 MCM	0.658 16.71	0.059 1.50	1.65 41.91	324461
4/0 AWG	190-231 MCM	0.658 16.71	0.059 1.50	1.89 48.01	2-324461-3
250 MCM	231-275 MCM	0.700 17.78	0.065 1.65	1.79 45.47	324462
300 MCM	275-325 MCM	0.768 19.51	0.071 1.80	1.93 49.02	324463
300 MCM	275-325 MCM	0.768 19.51	0.071 1.80	2.15 54.61	2-324463-4*
350 MCM	325-375 MCM	0.829 21.06	0.077 1.96	2.06 52.32	324464
400 MCM	375-450 MCM	0.886 22.50	0.083 2.11	2.20 55.88	324465
500 MCM	450-550 MCM	0.991 25.17	0.092 2.34	2.41 61.21	324466
500 MCM ¹	450-550 MCM	0.991 25.17	0.092 2.34	2.64 67.06	2-324466-2
600 MCM ¹	550-650 MCM	1.085 27.56	0.101 2.57	2.61 66.29	324467
600 MCM ¹	550-650 MCM	1.085 27.56	0.101 2.57	2.84 72.14	2-324467-3
700 MCM	650-750 MCM	1.172 29.77	0.109 2.77	2.79 70.87	324468
800 MCM ¹	750-850 MCM	1.252 31.80	0.118 3.00	2.96 75.18	324469
800 MCM ¹	750-850 MCM	1.252 31.80	0.118 3.00	3.31 84.07	2-324469-2
900 MCM ¹	850-950 MCM	1.328 33.73	0.125 3.18	3.13 79.50	324470
1000 MCM ¹	950-1125 MCM	1.400 35.56	0.131 3.33	3.27 83.06	324471
1000 MCM ¹	950-1125 MCM	1.400 35.56	0.131 3.33	3.62 91.95	2-324471-1

*Cleaned but not plated.

¹ Two crimps necessary on each end.

inches / (mm)



Dimensions displayed in **inches** / mm unless otherwise specified and are shown for reference purposes only. Specifications subject to change.

AMPOWER Terminals and Splices

Splices (continued)

Parallel Splice

WIRE SIZE

RANGE:

2 AWG to 1000 MCM
(34 to 507mm²)

BASE MATERIAL:

Annealed Copper
(ASTM B-188)


Electrodeposited
Tin Plate
(MIL-T-10727)

Wire Size	Wire Range	Barrel I.D. Min.	Dimensions		Part Number
			T	L Max.	
2 AWG	52,600-83,700 CM	0.372 9.45	0.039 0.99	0.49 12.45	324442
2 AWG	52,600-83,700 CM	0.372 9.45	0.039 0.99	0.49 12.45	1-324442-0*
1/0 AWG	83,700-119,500 CM	0.468 11.89	0.042 1.07	0.58 14.73	324443
2/0 AWG	119,500-190,000 CM	0.523 13.28	0.047 1.19	0.64 16.26	324444
2/0 AWG	119,500-190,000 CM	0.523 13.28	0.047 1.19	0.64 16.26	1-324444-0*
3/0 AWG	150,500-190,000 CM	0.586 14.88	0.053 1.35	0.71 18.03	324445
4/0 AWG	190-231 MCM	0.658 16.71	0.059 1.50	0.77 19.56	324446
4/0 AWG	190-231 MCM	0.658 16.71	0.059 1.50	0.77 19.56	1-324446-0*
250 MCM	231-275 MCM	0.700 17.78	0.065 1.65	0.83 21.08	324447
300 MCM	275-325 MCM	0.768 19.51	0.071 1.80	0.89 22.61	324448
300 MCM	275-325 MCM	0.768 19.51	0.071 1.80	0.89 22.61	1-324448-0*
350 MCM	325-375 MCM	0.829 21.05	0.077 1.96	0.96 24.38	324449
400 MCM	375-450 MCM	0.886 22.50	0.083 2.11	1.02 25.91	324450
500 MCM	450-550 MCM	0.991 25.17	0.092 2.34	1.11 28.19	324451
500 MCM	450-550 MCM	0.991 25.17	0.092 2.34	1.11 28.19	1-324451-0*
600 MCM ¹	550-650 MCM	1.085 27.56	0.101 2.57	1.21 30.73	324452
700 MCM ¹	650-750 MCM	1.172 29.77	0.109 2.77	1.29 32.77	324453
800 MCM ¹	750-850 MCM	1.252 31.80	0.118 3.00	1.36 34.54	324454
800 MCM ¹	750-850 MCM	1.252 31.80	0.118 3.00	1.36 34.54	1-324454-0*
900 MCM ¹	850-950 MCM	1.328 33.73	0.125 3.18	1.44 36.58	324455
900 MCM ¹	850-950 MCM	1.328 33.73	0.125 3.18	1.44 36.58	1-324455-0*
1000 MCM ¹	950-1125 MCM	1.400 35.56	0.131 3.33	1.50 38.10	324456
1000 MCM ¹	950-1125 MCM	1.400 35.56	0.131 3.33	1.50 38.10	1-324456-0*

*Cleaned but not plated.

¹Two crimps necessary.


inches / (mm)




Dimensions displayed in **inches** / mm unless otherwise specified and are shown for reference purposes only. Specifications subject to change.

AMPOWER Terminals and Splices


Special Terminals




90° Bent



Slotted Stud Hole



Centerline 2-Hole



Heavy Duty 4-Hole

90° Bent Terminals

WIRE SIZE RANGE:

2 AWG to 350 MCM
(34 to 375mm²)

Wire Size	Wire Range	Stud Size	Barrel I.D. Min.	Tongue Thickness Max.	Dimensions				Part Number
					L Max.	W Max.	F Min.	H Max.	
2 AWG 34-35 mm ²	52,600 83,700 CM	3/16 -	0.362 9.19	0.09 2.29	0.76 19.30	0.71 18.03	0.70 17.78	0.30 7.62	325223-1
		1/4 M6	0.362 9.19	0.09 2.29	0.76 19.30	0.71 18.03	0.70 17.78	0.30 7.62	55813-1
		3/8 -	0.362 9.19	0.09 2.29	0.76 19.30	0.71 18.03	0.70 17.78	0.30 7.62	55817-1
1/0 AWG	83,700-119,500 CM	5/16 M8	0.468 11.89	0.10 2.54	0.85 21.59	0.87 22.10	0.95 24.13	0.42 10.67	325320
4/0 AWG	190-231 MCM	3/8	0.658 16.71	0.13 3.30	1.20 30.46	1.19 30.23	2.24 56.90	0.59 14.99	54634-2*

*Two Stud Holes

inches / (mm)

Slotted Stud Hole

WIRE SIZE RANGE:

400 to 500 MCM
(203 to 253mm²)

Wire Size	Wire Range	Stud Size	Barrel I.D. Min.	Tongue Thickness Max.	Dimensions					Part Number
					L Max.	H Max.	C Min.	K	W Max.	
400 MCM	375-450 MCM	3/8 -	0.876 22.25	0.18 4.57	5.82 147.83	0.44 11.18	3.29 83.57	1.30 33.02	1.61 40.89	276963-1
500 MCM	450-550 MCM	3/8 -	0.981 24.92	0.20 5.08	6.01 6.35	0.44 11.18	3.25 82.55	1.30 33.02	1.80 45.72	276964-1

inches / (mm)

Heavy Duty 4-Hole

WIRE SIZE RANGE:

350 to 600 MCM
(177mm² to 304mm²)

Wire Size	Wire Range	Stud Size	Barrel I.D. Min.	Tongue Thickness Max.	Dimensions					Part Number
					L Max.	H Max.	C Min.	K	W Max.	
350 MCM	325-375 MCM	1/2 M12	0.850 21.59	0.26 6.60	4.85 123.19	0.531 13.49	2.50 63.50	1.25 31.75	2.38 60.45	276920-1
500 MCM	450-550 MCM	1/2 M12	0.991 25.17	0.27 6.85	4.93 125.22	0.531 13.49	2.50 63.50	1.25 31.75	2.38 60.45	277146-1
600 ² MCM	550-650 MCM	1/2 M12	1.120 28.45	0.26 6.60	4.93 125.22	0.531 13.49	2.50 63.50	1.25 31.75	2.38 60.45	276919-1

² Two crimps necessary.

inches / (mm)

Center 2-Hole Terminals

WIRE SIZE RANGE:

4/0 AWG to 600 MCM
(100mm² to 304mm²)

Wire Size	Wire Range	Stud Size	Barrel I.D. Min.	Tongue Thickness Max.	Dimensions					Part Number
					L Max.	H Max.	C Min.	K	W Max.	
4/0 AWG	190-231 MCM	5/16 M8	0.648 16.46	0.13 3.30	4.24 107.70	0.45 11.43	1.93 49.02	.875 22.23	1.19 30.23	277143-1
500 MCM	450-550 MCM	3/8 -	0.991 25.17	0.26 6.60	4.01 101.85	0.45 11.43	2.00 50.80	1.00 25.40	1.26 32.00	276887-1
600 ² MCM	550-650 MCM	3/8 -	1.085 27.56	0.31 7.87	4.10 104.14	0.45 11.43	2.00 50.80	1.00 25.40	1.26 32.00	276918-1

² Two crimps necessary.

inches / (mm)

Dimensions displayed in **inches** / mm unless otherwise specified and are shown for reference purposes only. Specifications subject to change.

AMPOWER Terminals and Splices

Application Tooling

DYNA-CRIMP SYSTEM

8200 psi Operating
Pressure

Hydraulic Head		69099	69082	68073-3	58445-1
Wire Size		Part Numbers			
(mm²)	(AWG)	Die Set	Die Set	Die Set	Die Set
13-15	6	69133-1	-	-	-
21	4	69134-1	-	-	-
34-35	2	46765-3	-	-	-
50-60	1/0	46766-2	-	-	-
67-70	2/0	46767-2	-	-	-
80-95	3/0	46749-2	-	-	-
100-125	4/0	46750-2	-	-	-
127	250 MCM	46751-2	-	-	46751-2
152	300 MCM	46752-2	-	-	-
177	350 MCM	46753-2	69653	-	-
203	400 MCM	-	46754-2	-	-
253	500 MCM	-	46755-2	-	-
304	600 MCM*	-	46756-2	-	-
	600 MCM HD*	-	59870-1	-	-
355	700 MCM*	-	46757-2	-	-
405	800 MCM*	-	46758-2	-	-
456	900 MCM*	-	46759-2	-	-
507	1000 MCM*	-	46760-2	-	-
634	1250 MCM*	-	-	68114-1	-
761	1500 MCM*	-	-	68282-1	-

* Terminals and splices of wire size 600 MCM and above require two crimps for optimum mechanical and electrical performance.



AMPOWER Terminals and Splices

Application Tooling (continued)

HYDRAULIC CRIMP TOOLING 10000 PSI OPERATING PRESSURE

		Hand Tools (U-Die)		Hydraulic Heads (U-Die)		Hydraulic Heads (Shank Die)		
		1490748-1	1490749-1	1490745-1 1490747-1	1490746-1	1752868-1	1752788-1	1752786-1
Wire Size		Die Set Part Numbers						
(mm ²)	(AWG)							
13-15	6	1583092-1				69133-1	-	-
21	4	1583093-1				69134-2	-	-
34-35	2	1583094-1				46765-3	-	-
50-60	1/0	1583095-1				46766-2	-	-
67-70	2/0	1583096-1				46767-2	-	-
80-95	3/0	1583097-1				46749-2	-	-
100-125	4/0	-	1583098-1	-	1583098-1	46750-2	-	-
127	250 MCM	-	-	-	-	46751-2	46326-2	-
152	300 MCM	-	-	-	-	46752-2	-	-
177	350 MCM	-	-	-	-	46753-2	-	69653
203	400 MCM	-	-	-	-	-	-	46754-2
253	500 MCM	-	-	-	-	-	-	46755-2
304	600 MCM*	-	-	-	-	-	-	46756-2
	600 MCM HD*	-	-	-	-	-	-	59870-1
355	700 MCM*	-	-	-	-	-	-	46757-2
405	800 MCM*	-	-	-	-	-	-	46758-2
456	900 MCM*	-	-	-	-	-	-	46759-2
507	1000 MCM*	-	-	-	-	-	-	46760-2

* Terminals and splices of wire size 600 MCM and above require two crimps for optimum mechanical and electrical performance.

AMPOWER Terminals and Splices

Part Number Index

Note: This numerical index lists all cataloged parts by base no. only. Complete part nos. (with prefixes and/or suffixes) are shown on the page(s) indicated.

Part No.	Page	Part No.	Page	Part No.	Page	Part No.	Page
50990	7	324450	12	325410	7	326105	9
53081	10	324451	12	325502	7	326106	9
53084	10	324452	12	325503	7	326107	9
53085	10	324453	12	325505	7	326111	9
53087	10	324454	12	325508	7	326117	9
53088	10	324455	12	325516	7	326123	9
53089	10	324456	12	325600	7	326211	10
53641	9	324457	11	325602	7	326222	10
53642	9	324458	11	325603	7	326305	10
53680	6	324459	11	325605	7	326405	10
53681	7	324460	11	325610	7	326406	10
53683	7	324461	11	325611	7	326413	10
53684	8	324462	11	325614	7	326799	6
53686	10	324463	11	325702	8	326800	6
54634	13	324464	11	325703	8	326801	7
55813	13	324465	11	325705	8	326802	7
55817	13	324466	11	325707	8	326803	7
55992	7	324467	11	325708	8	326804	8
55993	8	324468	11	325712	8	326805	8
276887	13	324469	11	325719	8	326806	9
276916	10	324470	11	325802	8	326807	9
276917	8	324471	11	325803	8	326808	9
276918	13	325200	6	325805	8	326809	10
276919	13	325201	6	325806	8	327284	7
276920	13	325202	6	325807	8	327285	8
276963	13	325203	6	325814	8	327286	8
277143	13	325207	6	325816	8	327287	9
277146	13	325223	13	325821	8	327289	9
324442	12	325250	6	325903	9	327290	10
324443	12	325300	6	325905	9	327292	10
324444	12	325301	6	325906	9	327294	10
324445	12	325302	6	325917	9	328141	6
324446	12	325303	6	326003	9	328142	6
324447	12	325304	6	326005	9	328143	6
324448	12	325305	6	326007	9	328144	6
324449	12	325308	6	326012	9	328158	6
		325318	6	326016	9	328162	6
		325320	13	326020	9	328163	6
		325401	7	326021	9	328164	6
		325402	7	326103	9	328169	6
		325403	7			328178	6
		325405	7				
		325406	7				

This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.

[illegible]

This image shows a full page of blank, lined paper. It features approximately 30 horizontal blue or grey lines spaced evenly apart, typical of notebook paper. The lines extend across the entire width of the page, leaving small margins at the top and bottom. There are no vertical lines, text, or other markings on the page.

LET'S CONNECT

We make it easy to connect with our experts and are ready to provide all the support you need. Just call your local support number or visit www.te.com/industrial to chat with a Product Information Specialist.

TECHNICAL SUPPORT

te.com/support-center

Australia	+86 400-820-6015	Hungary	+36 1-2892040	Portugal	+34 91-6630420
Austria	+43 1-9056-0	India	+86 400-820-6015	Russia	+74 95-790-2200
Belgium	+31 73-6246999	Ireland	+1 800-882-391	Slovakia	+42 02-720-11102
Brazil	+55 11-2103-6000	Italy	+39 011-4012111	Slovenia	+38 615-602-132
China	+86 400-820-6015	Japan	+044-844-8052	South Africa	+97 150-457-0806
Czech Republic	+42 02-7201-1103	Korea	+02-3415-4607	Spain	+34 932-910-330
Denmark	+46 8-5072-5000	Latvia	+37 2-6778-673	Sweden	+46 8-5072-5000
Estonia	+37 2677-8673	Lithuania	+37 037426900	Switzerland	+41 71-447-0447
Finland	+46 8-5072-5000	Luxembourg	+31 73-6246999	Taiwan	+86 400-820-6015
France	+33 1-34-20-8686	Netherlands	+31 73-6246999	Turkey	+90 212-282-6053
Germany	+49 6151-607-1999	New Zealand	+86 400-820-6015	United Kingdom	+44 800-267666
Greece	+97 1-4-347-0226	Norway	+46 8-5072-5000	USA	800-522-6752
Holland	+31 73-6246999	Poland	+48 22-4576750		

te.com

TE Connectivity, TE Connectivity (logo) and Every Connection Counts are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

While TE has made every reasonable effort to ensure the accuracy of the information in this brochure, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this catalog are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult TE for the latest dimensions and design specifications.

© 2017 TE Connectivity Ltd. family of companies All Rights Reserved.

1-1773934-9 09/19 Original

CATALOG

Tyco Electronics UK Ltd.

Faraday Road,
Dorcan,
Swindon,
Wiltshire,
SN3 5HH

Tel 01793 528171
www.te.com