

Specifications and Dimensions

Capacity: 3,000 lb [1361 kg] maximum crimp force
5,000 lb [2268 kg] maximum crimp force

Noise: 76 dBA maximum at 3,000 lb [1361 kg] full capacity
80 dBA maximum at 5,000 lb [2268 kg] full capacity

Weight: Approximately 150 lb [68 kg]


Height: 20" [510] (without reel support)

Electrical: 100-240 VAC, 50/60 Hz (6A)


- Average <1 A at 120 VAC when used as a bench-top unit at 2 000 cycles per hour operating rate

Air: 90-100 psi [6.21-6.90 bar], 6 scfm [0.00282 m³/s]
(when required for use with air-feed applicators)
Note: Optional Air Feed Valve Assembly required (see below).


DT-3000 End Feed

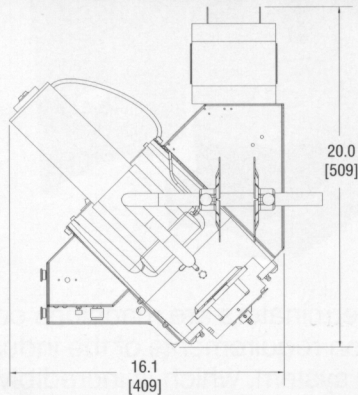


DT-3000 Side-Feed w/CQM

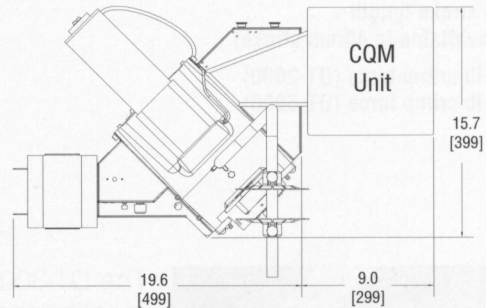

DT-5000 End Feed

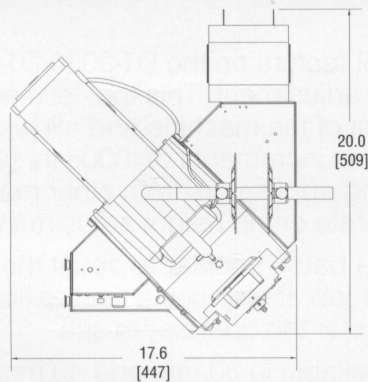

DT-5000 Side-Feed w/CQM

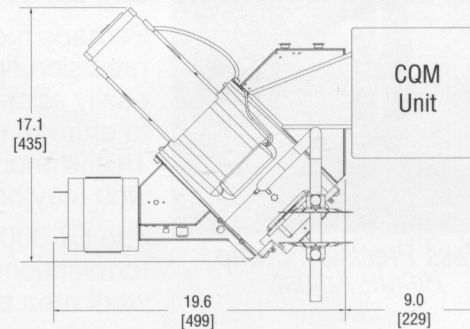

Termination Unit	DT-3000	DT-5000
Universal Base Plate (JAM Adapters), 30mm	1725100-1	1725800-1
AMP Base Plate, 30mm	1725100-2	1725800-2
AMP Base Plate, 40mm	1725100-3	1725800-3
JAM Quick Mount Base Plate, 30mm	1725100-4	1725800-4
Universal Base Plate (JST Adapters), 30mm	1725100-5	1725800-5
AMP CQM Base Plate / Sensors, 30mm	1725100-6	1725800-6
AMP CQM Base Plate / Sensors, 40mm	1725100-7	1725800-7
Optional Features	DT-3000	DT-5000
HDC Applicator Adapter (Universal baseplate) *	1725156-1	1725156-1
HDM / HDI Applicator Adapter (Quick-change baseplate) *	1725156-2	1725156-2
HDC Applicator Adapter (with Quick-change baseplate) *	1725156-3	1725156-3
JST Applicator Adapter (with Universal baseplate) *	1725156-4	1725156-4
Air Feed Valve Assembly — 1 5/8" [40 mm] stroke	1424266-1	1424266-1
Air Feed Valve Assembly — 1 1/8" [30 mm] stroke	1424266-2	1424266-2
Terminal Lubricator Assembly	354550-3	354550-3

*For 30mm stroke machines only

Tyco Electronics, Harrisburg, PA 17105; Technical Support Center Phone: 1-800-522-6752, fax: 717-986-3316; tooling.tycoelectronics.com