

# HHF-JFCU

## Automotive in-line fuse holder for ATC blade-type fuses




#### **Product specifications**

Part Number	Description	Fuse size	Voltage rating	Electrical connection	Maximum continuous current rating	Body material	Body contact material
HHF-JFCU	Black fuseholder with cover	3 - 20 A	32 Vdc	16 Gauge yellow leadwire	20 A	Santoprene TPV	Brass/Tin plated

A fuse must be properly and fully inserted into the holder to provide a solid connection. Poor or improper insertion of the fuse can result in failure of the fuse and holder, thus not protecting the device for which it was intended.

#### Dimensions-mm

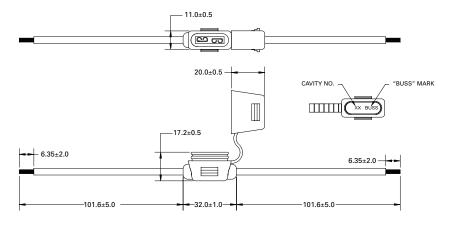

#### General specifications

Normal operating temperature: +25°C ±2°C Storage temperature: -10°C to +40°C IPx7 rating for exposed locations

### **Packaging**

Bulk: (500 parts per box)

Life Support Policy: Eaton does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user

Eaton reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Eaton also reserves the right to change or update, without notice, any technical information contained in this bulletin.

#### Eaton

### Electronics Division

1000 Eaton Boulevard Cleveland, OH 44122 Faton.com/elx

© 2024 Eaton All Rights Reserved Printed in USA Publication No. 10443 December 2024

Eaton is a registered trademark.

All other trademarks are property of their respective owners.

