



For immediate budgetary information contact the nearest office location shown on the back of this catalog cover.

ACCESSORIES

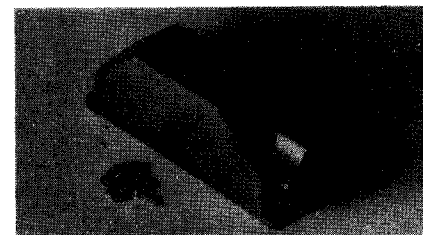


JUNCTION SHELL KIT—DL1-J/S
Part No. 249-1950-000

- Stainless steel cable clamps
- Knockout plug provides alternate second cable entry
- Cable clamp can be mounted for right angle or straight cable entry
- .625 (15.9) max. cable entry

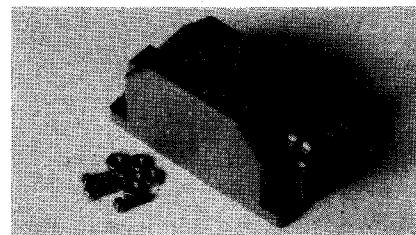


JUNCTION SHELL KIT—DL2-J/S
Part No. 249-1985-000

- Stainless steel cable clamp
- Two piece junction shell
- Cable clamp can be mounted for right angle or straight cable entry
- .560 (14.2) max. cable entry

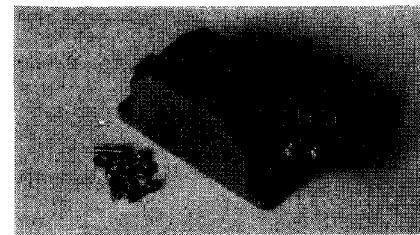

JUNCTION SHELL KIT—DL2-1-J/S
Part No. 249-1985-001

- Stainless steel cable clamps
- Two piece junction shell
- 45° cable entry
- For .625 (15.9) max. cable entry

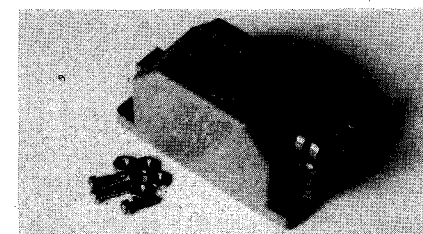


JUNCTION SHELL KIT—DL2-2J/S
Part No. 249-2238-000

- Stainless steel cable clamp
- Two piece junction shell
- Straight or right angle cable
- .625 (15.9) max. cable entry




JUNCTION SHELL KIT—DL3-J/S
Part No. 249-2060-000

- Stainless steel cable clamp
- Two piece junction shell
- Cable clamp can be mounted for right angle or straight cable entry
- .560 (14.2) max. cable entry

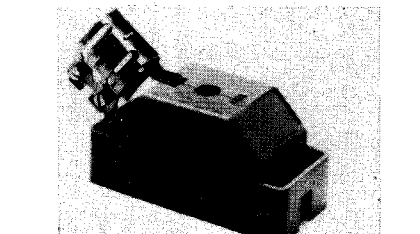

JUNCTION SHELL KIT—DL3-2J/S
Part No. 249-2060-001

- Stainless steel cable clamps
- Two piece junction shell
- 45° cable entry
- For .625 (15.9) max. cable entry

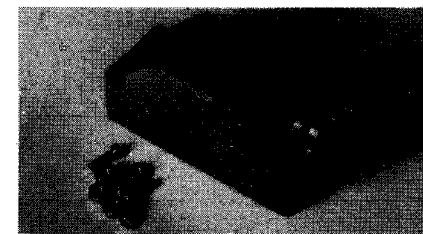

JUNCTION SHELL KIT—DL3-3 J/S
Part No. 249-2237-000

- Stainless steel cable clamp
- Two piece junction shell
- Straight or right angle cable entry
- .625 (15.9) max. cable entry



CABLE CLAMP KIT—DL1-C/C
Part No. 218-0179-000

- For use on DL1 junction shell
- Right angle or straight mounting
- .625 (15.9) max. cable entry



CABLE CLAMP KIT—DL2-C/C
Part No. 218-0180-000

- Also used on DL3 junction shell
- Right angle or straight mounting
- .560 (14.2) max. cable entry



CABLE CLAMP KIT—DL2-1-C/C LRG
Part No. 218-0181-000

- Also used on DL2-J/S
- 45° cable entry
- .625 (15.9) max. cable entry



CABLE CLAMP KIT—DL2-2 C/C
Part No. 218-0181-001

- Also used on DL3
- Straight or right angle mounting
- .625 (15.9) max. cable entry




ACTUATING HANDLE KIT—DL HANDLE
Part No. 204-0016-000

- Provides a convenient method of actuating the contacts and cam for locking the connector
- Kit provides actuating handle and attaching screw
- Pointer on handle denotes "locked" and "open" positions


For immediate budgetary information contact your nearest office location shown on the back of this catalog cover.

ACCESSORIES

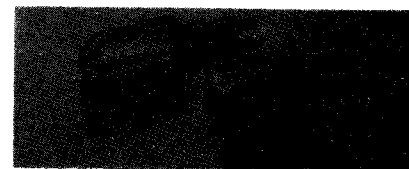

PROTECTIVE BOOTS Straight (180°)
Part No. DL1-Boot (transparent)
Right Angle (90°)
Part No. DL1-Boot R/A (transparent)

- Snaps over junction shell
- Graduated cable entry for wide range of cable diameters
- Fits on plug or receptacle
- Note: Boots are available for DL1, 2 and 3 series. Consult factory for ordering information.

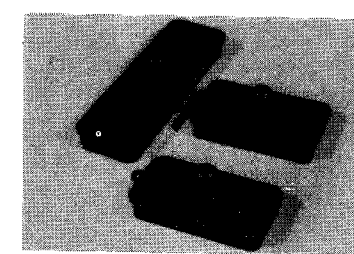

PROTECTIVE CAP Part No. DL1-P-D/C

- Polyethylene material
- Available only for plugs (Consult factory for availability of receptacle dust caps.)



CORNER MOUNTING POLARIZING POST
(For DL1-156, DL2-96 and DL3-60)
Part No. DL-POL-POST KIT/CORNER

- Kit No. 320-0021-001
Contains 4 posts and 4 screws
- Kit No. 320-0021-006
Contains 2 posts and 2 screws


CRIMP TOOLS

HAND CRIMP TOOL



995-0001-661
Part Number CCT-DL for AWG #20 thru #28 wire (Insulation Support)
Part Number CCT-DL3 for AWG #18 wire (Without Insulation Support)
Part Number CCT-DLT for AWG #20 thru #28 wire (Insulation Support)
CCT-DLT-1 28-32 WIRE

WIRE STRIP DIMENSIONS

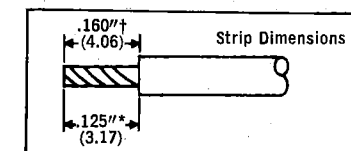

*For contacts (#20 thru #32 AWG wire)
†For contacts (#18 AWG wire)

995-0001-903
995-0002-154
995-0002-084

EXTRACTION TOOLS

CONTACT EXTRACTION TOOL




CEFDL10
Part No. 274-7029-007

FRONT REMOVABLE WIRE WRAPPABLE CONTACT EXTRACTION TOOL



CEFECP
Part No. 274-7045-000
Front removable .025 (.64) Square Wrap Post Contact Extraction Tool.
(Use on RW4 and PW4 assemblies with contact part number 030-2235-002 only.)

BUSS CONTACT EXTRACTION TOOL—DL3

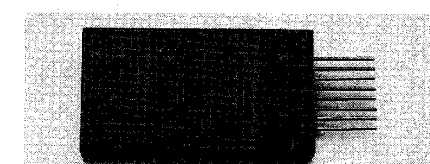

Description	Part Number
One pair	274-7029-003
Two & three pair	274-7029-004
Four pair	274-7029-005
Five & six pair	274-7029-006

BUSSED CONTACTS

Designed for power distribution requirements of more than 5 amps.



- Accommodates #18 thru #30 AWG wire

DL Buss Contacts (Loose)	
DL-C, Buss 1 pair	030-7380-001
DL-C, Buss 2 pair	030-7380-002
DL-C, Buss 3 pair	030-7380-003
DL-C, Buss 4 pair	030-7380-004
DL-C, Buss 5 pair	030-7380-005
DL-C, Buss 6 pair	030-7380-006

See page 263 for extraction tools.

EAR99-These commodities, technology, or software were exported from the United States in accordance with the Export Administration Regulations. Diversion contrary to United States law is prohibited.