


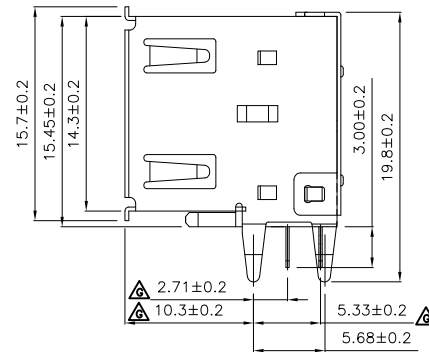


Section A-A

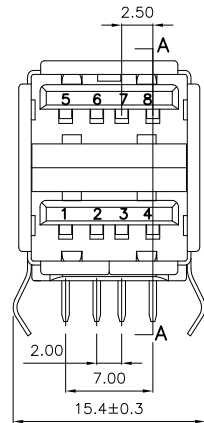

PCB layout



Specifications:

Current Rating:1.5A AC/DC

Voltage Rating:30V AC/DC

Contact Resistance:30m ohm. Max.

Insulation Resistance:1,000M ohm. min.

Withstanding Voltage:500V AC For One Minute

Operating Temperature Range:-40°C ~ +105°C

Material and Finish

Insulator:PBT (UL94V-0)

Insulator Color:Black

Contact:Brass

Plating:30u" Gold Plated on Contact Area,

Tin Plated on Solder Tail.

Shell:Brass,Nickel Plated

Back Cover:Brass,Nickel Plated

RoHS Compliant

				DRAWN:	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15	CnC Tech Industrial Cable and Connector Technology		D
				CHECKED:	UNIT: MM	DESCRIPTION: USB A Double Socket R/A,30u"	SIZE A4	
					SCALE:1:1			
	05—FEB—2020			APPROVAL:	SHEET: 1 / 2	PART NO: 1002-004-01010		
REV	DATE	FILE	BY		PROJECTION: 			

