

4




3

2

1

used for:

D-SUB

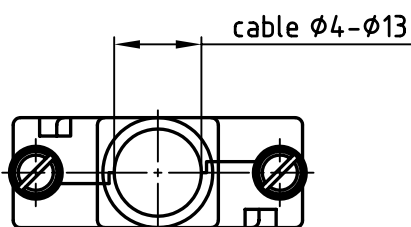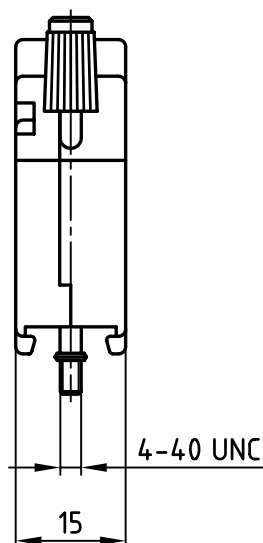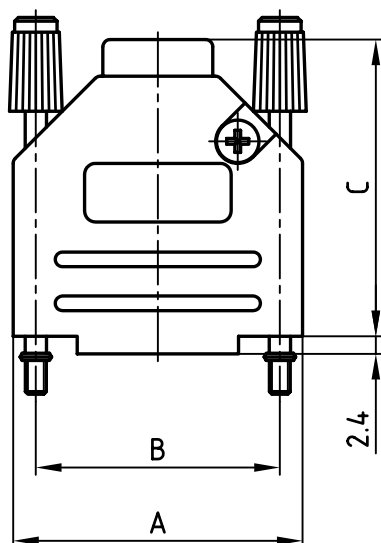

Directive 2002/95/EC
„RoHS“
Compliant

No. of pos.	A	B	C	Part NO.
9	31.0	25.0	38.3	165X02609XE
15	39.5	33.3	40.5	165X02619XE
25	53.4	47.0	47.3	165X02629XE
37	70.9	63.5	52.2	165X02639XE

Technical Data:

Material and finish: zinc die-cast, nickel plated

Cable strain relief: steel fibre reinforced polycarbonate UL 94 V-0

Temperature range: -40°C to +120°C


Attenuation factor: > 40dB between 30 MHz and 1 GHz

APPROVAL # FREIGABE # DEBLOCAGE # AUTOR/ZACON # APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL # FREIGABE # DEBLOCAGE # AUTOR/ZACON # APPROVAL	

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name
a	Origin		

tolerance



scale:

1:1

material:

SEE NOTES

title:

METAL HOOD
9-37pos. EMI/RFI SHIELDING
with straight cable exit and jack screws

dwg no:

AutoCAD 2004

DIN-A

16K1A1744

4

sh: 1/1

part no:

SEE TABLE

4

3

2

1