

TG/LTG-Series

Single Pole Rocker & Paddle Switches

PRODUCT WEBPAGE

request sample, configure part





The TG-Series Mid-Sized Tippette rocker switches are single or double pole and feature an all nylon construction. These switches are designed with snap-in mounting for fast, low cost assembly. The illuminated version (LTG) is available with either a paddle or rocker actuator. These AC rated switches are also suitable for low-voltage DC applications assuring compatibility for a wide range of markets.

125-250

6-28

Poles

Amps

Typical Applications

Appliances

On-Highway

· HVAC

- · Commercial Food
- · Medical Equipment





Tech Specs

Dielectric Strength

UL/CSA: 1000V - live to dead metal parts

Electrical Life

50,000 cycles - maintained 25,000 cycles - momentary

Operating Temperature

32°F to 185°F (0°C to 85°C)

W White

W White

125N

Indices.

Panel Cut-Out Recommendations: For sheet metal panels, switch must enter panel in same direction as the punch. (Burr on bottom.) Test cut hole in actual material.

Custom colors are available. Consult factory.

Specify lens color for LTG-Series only.

C Clear

Ordering Scheme

Sample Part Number Selection

1. SERIES

Double Pole, Non-Lighted Double Pole with Indicator Lights

2. CIRCUIT see next page for diagram

TG available with circuits A, B, C, D, E, F LTG available with circuits G, H, I, J, M, N, P, Q, R, T, U, V, Y, Z.

3. CENTER POSITION

Center OFF, Three position No Center OFF, Two position

4. RATING

5A 250VAC, 10A 125VAC, 1/2HP 125-250VAC 5A 250VAC, 10A 125VAC 10A 250VAC, 15A 125VAC, 3/4HP 125-250VAC 10A 250VAC, 15A 125VAC

5. TERMINATION / FUNCTION

	Solder Lug	.250 Tab QC	.187 Tab QC	Wire Leads	
On-None-Off	0	1 `	3 `	5	
(On)-None-Off	Α	В	D	F	
Òn-None-(Off)	L	М	R	T	
On-None-On	0	1	3	5	
On-None-(On)	Α	В	D	F	
On-Off-On` ´	0	1	3	5	

🛭 Configure Complete Part Number >

7. ACTUATOR COLOR 2

B Black

B Black

A Amber

incandescent

6V

18V 24V 28V

8. BASE COLOR

9. LENS COLOR 3

10. LAMP VOLTAGE

6 volt 12 volt

18 volt 24 volt 28 volt

Indicates momentary function.

Browse Standard Parts >

R Red


125 volt neon 250 volt neon


6. ACTUATOR STYLE


Paddle Rocker


Dimensional Specs

inches [millimeters]



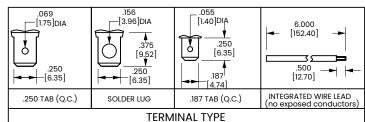





MOUNTING HOLE