
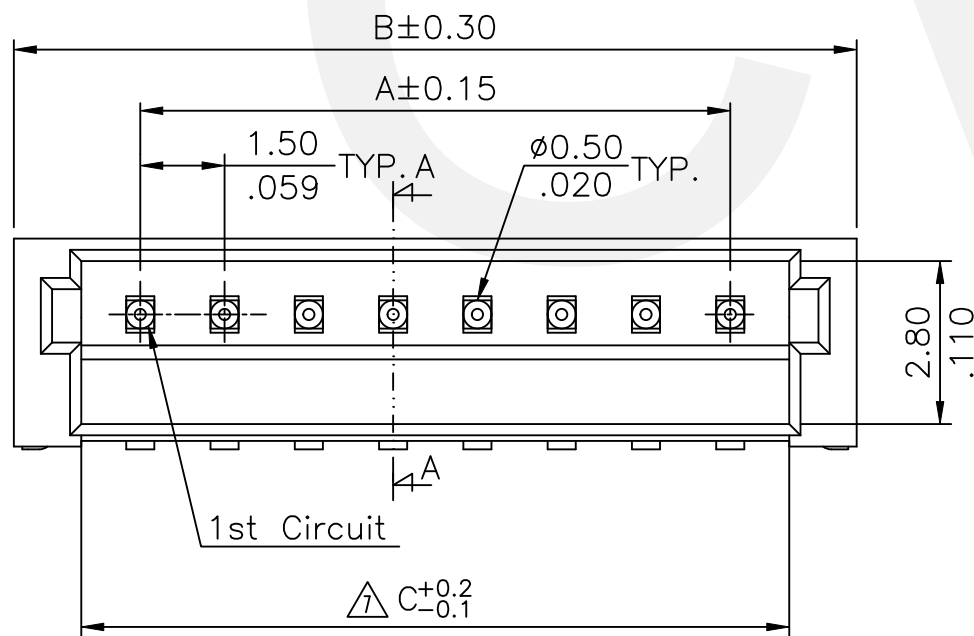


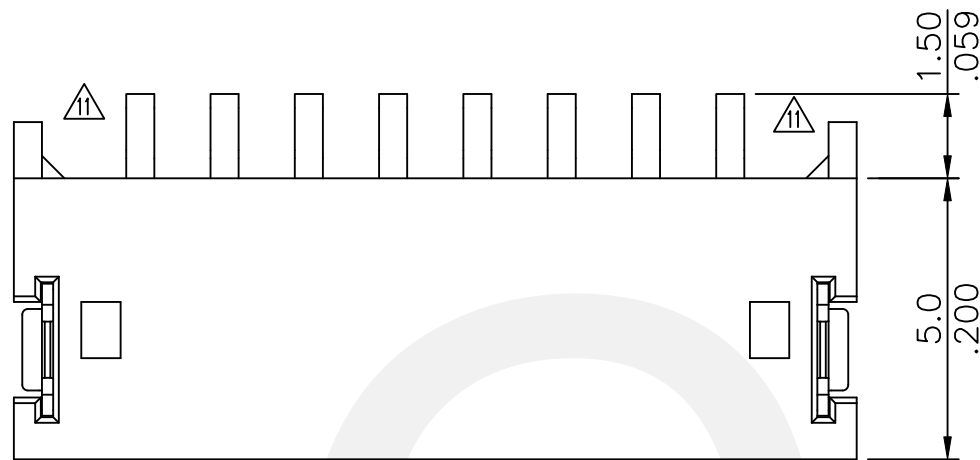

DIM. A = 1.50 x NO. OF SPACES

DIM. B = DIM. A + 4.5

DIM. C = DIM. A + 2.1


* AVAILABLE IN 2 THROUGH 13 CIRCUITS

Material:


Base: Nylon 46 UL 94V-0, Color Nature

Contact: Copper alloy with Tin plated

Tab: Copper alloy with Tin plated

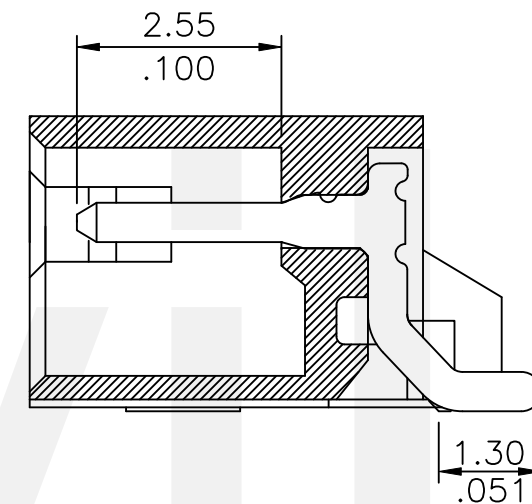


SEC. A-A SCALE 7/1

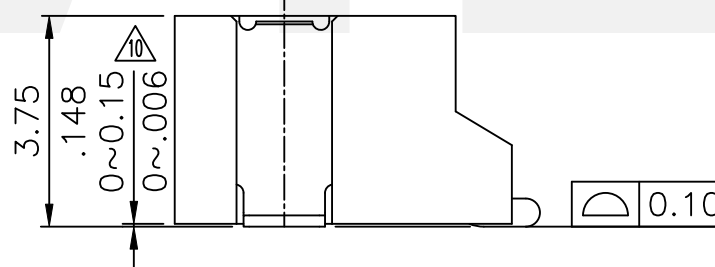

ORDERING CODE

CI15 ** M 1 H R0
① ② ③ ④ ⑤ ⑥

- ① Series No.
② Contacts: 02 to 13
③ M= SMT type header
④ Plating:
1= 100μ" Min. Tin Plated
over 50μ" Nickel
⑤ Type: H= Right angle
⑥ Other option:
R0= Tape & reel packing (Standard)
T0= Tube packing

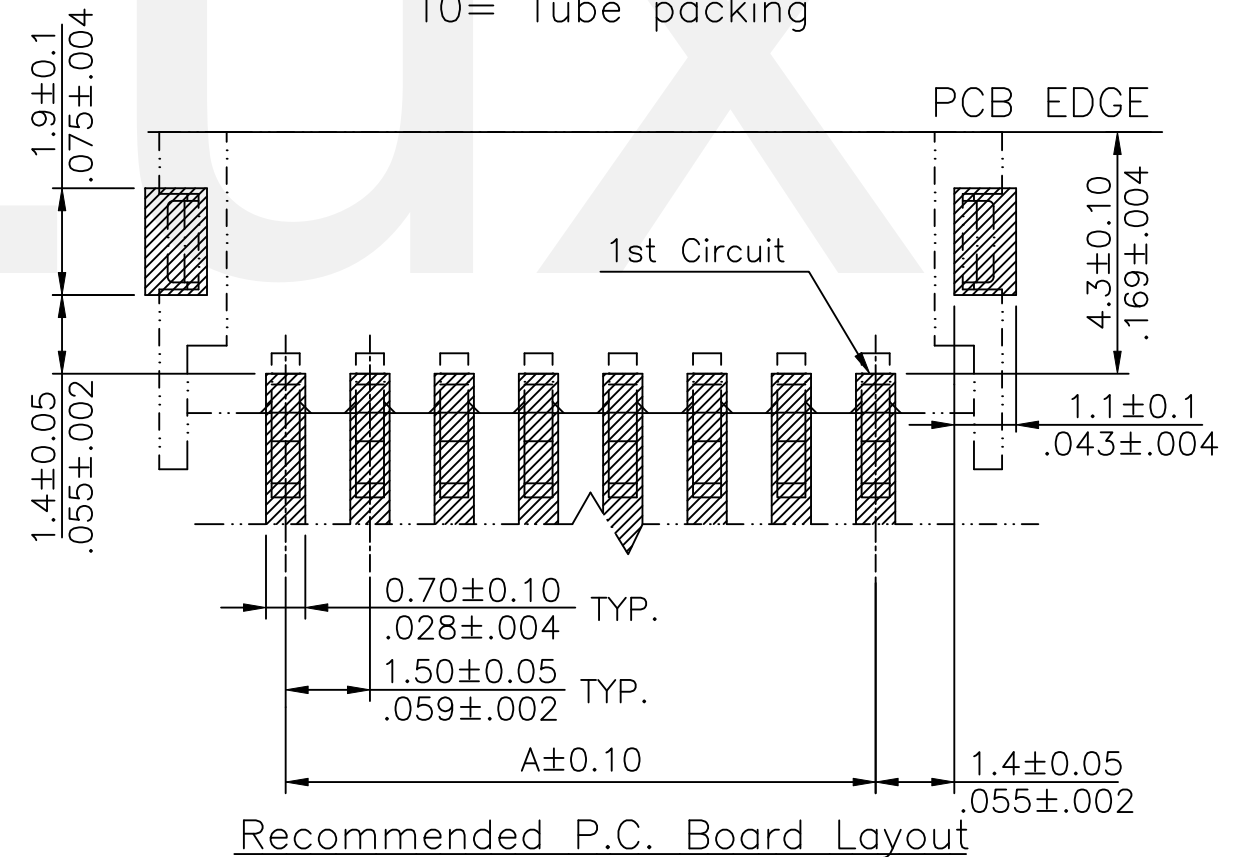

Tin-Lead Process

RoHS Compliant

12	Amy	12/25-23'	ECNT123179/ECRB123029		DATE	UNIT: mm / inch	TITLE: 1.50MM(.059") Right Angle SMT Type Header	 瀚荃股份有限公司 CviLux Corporation			
11	Yushu	9/11-19'	ECRQ119009/ECNT119310	DRAWN BY: Amy	12/25-23'	TOLERANCE UNLESS OTHERWISE SPECIFIED	MATERIAL:				
10	Sun	7/05-16'	ECRH116023/ECNT116141	ENGINEER: Sun	12/25-23'	.X ± 0.30/.012 X' ± 1"	FINISH:	DRAWING NO.	CI1501SL	PART NO.	CI15**M1H*0
9	Enya	9/11-13'	ECNT113054/ECRH113002	CHECKED BY: Eisley	12/25-23'	.XX ± 0.20/.008 .X' ±		SCALE	5 / 1	SHEET	1 OF 2
SYM	NAME	DATE	REVISIONS	APPROVED BY: Eisley	12/25-23'	.XXX ± 0.10/.004 .XX' ±					

