



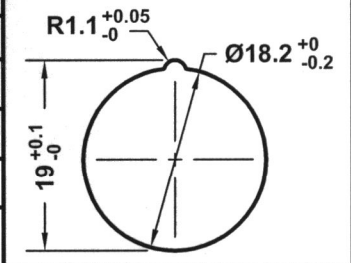



Rating	10A 125V, 6A 250V AC		Mounting Hole	Circuit Diagram
Contact Resistance	50m ohm max.			 SPST ON - OFF
Insulation Resistance	DC 500V 100M ohm min.			
Dielectric Strength	AC 1500V 1 minute			
Operating Temperature	-25 °C ~ 85 °C			
BASE COLOR: Black BUTTON COLOR: Black PRINTED: White, hot stamping				



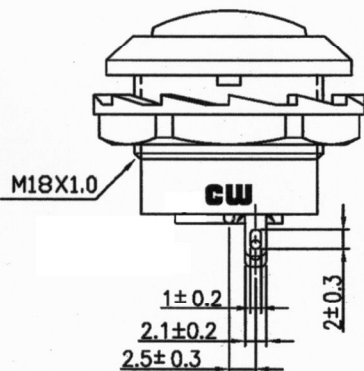

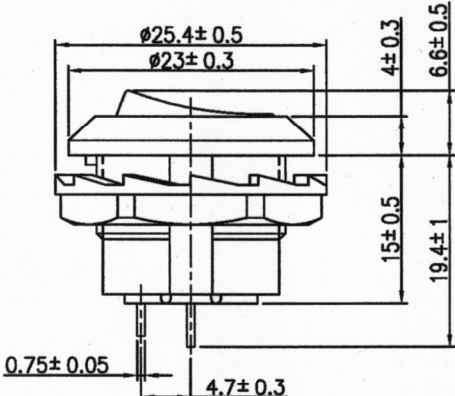





RoHS Compliant



INDUSTRIES
Southampton, Pa. 18966
Tel 215.355.7080/www.cwind.com

Date Drawn: 12/17/09 Rev. 0

Title: **ROCKER SWITCH**

Unit: mm Checked By: **G. Guld**

CW P/N: **GRB130A05BB2**

CW INDUSTRIES
Southampton, Pa. 18966
Tel 215.355.7080/www.cwind.com

Checked By: G. Guld

CW P/N:
GRB130A05BB2