

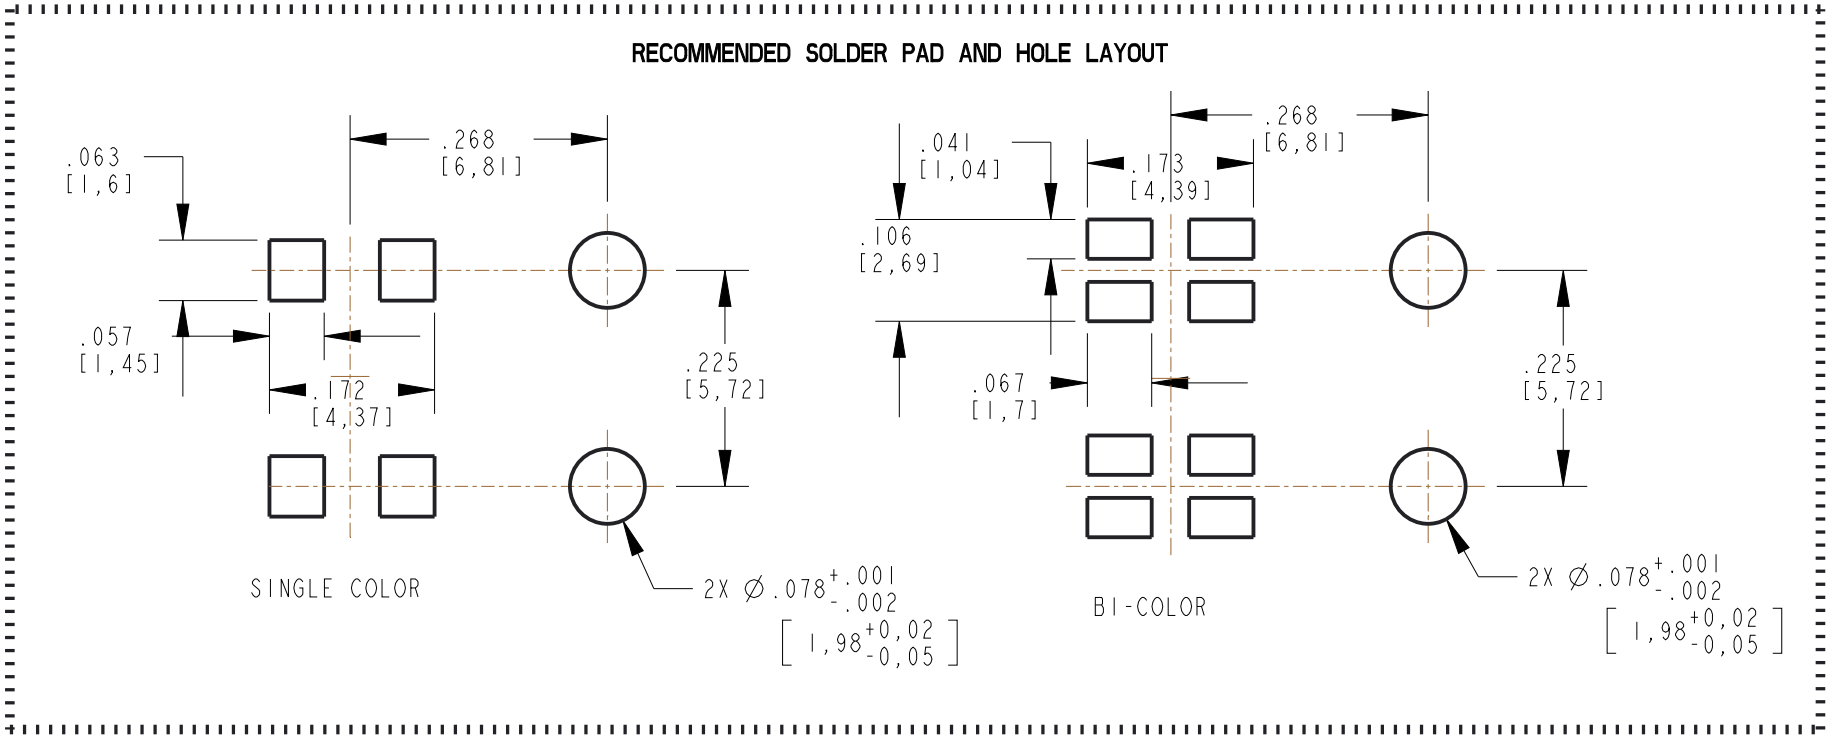
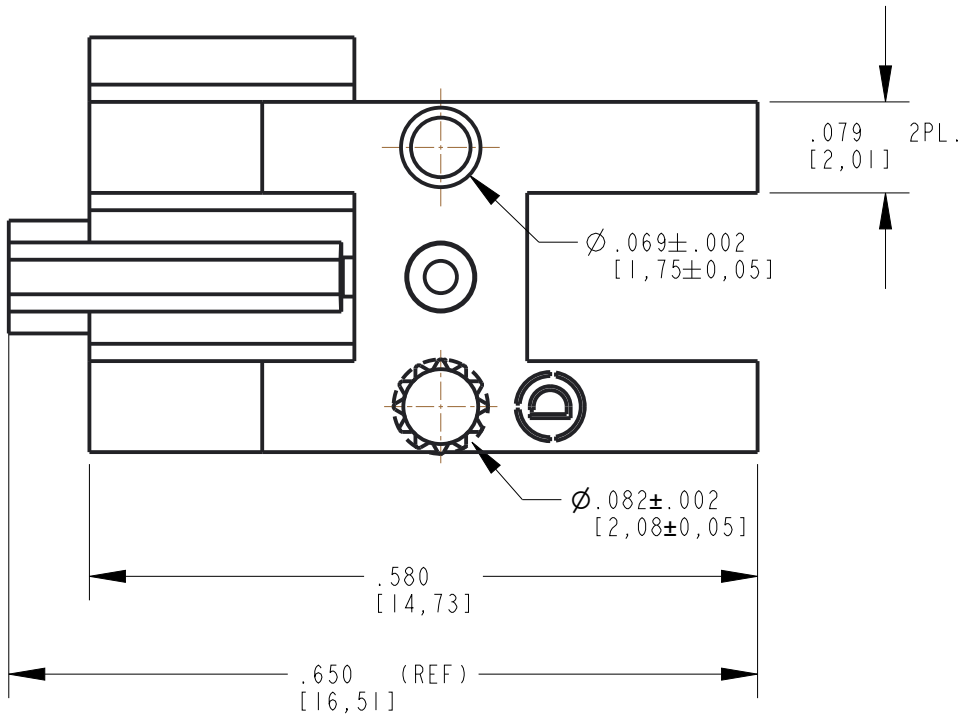
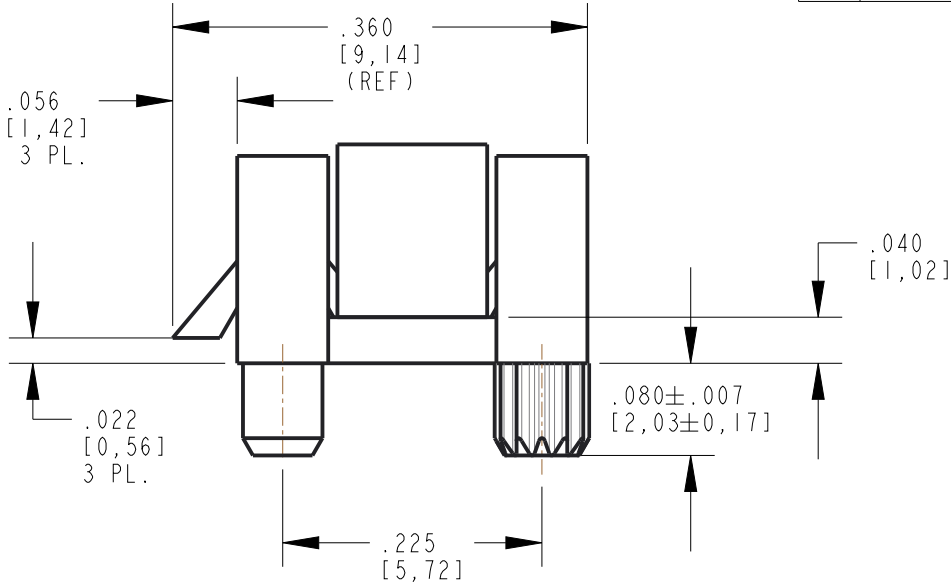


REV	ECN NO	REVISIONS	DRN	CKD	APP	DATE
A	102495	NEW RELEASE	LD	CS	NO	3-9-23

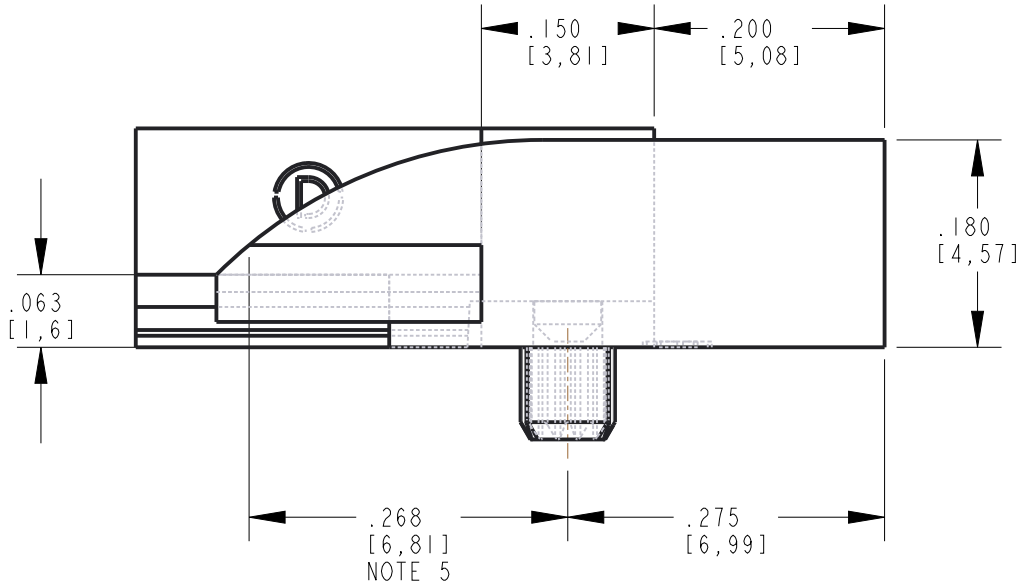

- NOTES:
- DIALIGHT PART NUMBER 515-1005-801F,
 - MATERIAL TO BE CLEAR, TRANSMISSABLE POLYCARBONATE (UL 94V-0 FLAMABILITY).
 - COMPONENTS DESIGNED TO BE PRESSED INTO PC BOARD.
 - STORAGE AND OPERATING TEMPERATURE: -30 C TO +100 C
 - REFERENCE POSTITION OF LED.
 - RECOMMENDED SURFACE MOUNT DIALIGHT LEDS:
597-3XXI-50XF (SINGLE COLOR)
597-7XXI-50XF (BI COLOR)

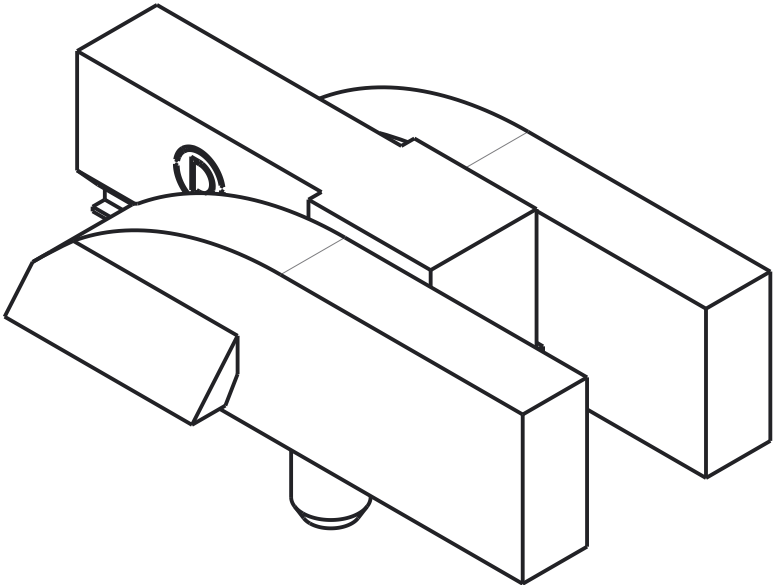

THIS DRAWING AND THE CONTENTS HEREIN ARE CONFIDENTIAL AND THE SOLE PROPERTY OF DIALIGHT CORP. REPRODUCTION OF THIS DRAWING OR CONSTRUCTION OF ANY PARTS WITHIN THIS DRAWING ARE FORBIDDEN WITHOUT THE WRITTEN CONSENT OF DIALIGHT CORP.		
DIALIGHT CORP. INTERNAL REFERENCE ONLY = 3D MODEL : 5151005801-A.5		
SCALE: 6.000	DRAWING NUMBER	REV
ALL DIM's: INCH (mm)		
TOLERANCES: UNLESS OTHERWISE SPECIFIED	C-18610	A
FRACTIONS: ±1/64	TITLE	
DECIMALS (.XX): ±.01	2 ELEMENT LIGHTPIPE/SHIELD ASSEMBLY	
DECIMALS (.XXX): ±.005	MATERIAL	
DECIMALS (.XXXX): ±.0005		
ANGLES: ±1°		
FINISH		
FSCM 83330		

1501 ROUTE 34 SOUTH
FARMINGDALE, NJ 07727
(732) 919-3119
www.dialight.com