


RECOMMENDED PANEL DIMENSIONS FOR FLUSH MOUNT INSTALLATION

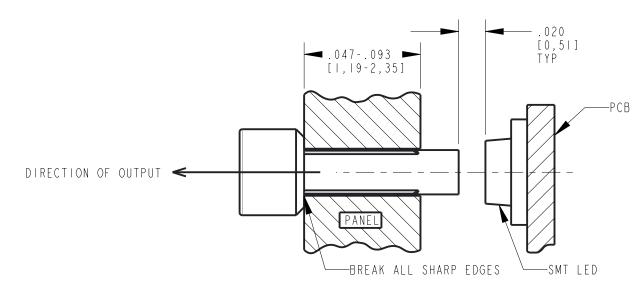

RECOMMENDED PANEL DIMENSIONS FOR PROTRUDED INSTALLATION & RECOMMENDED LED PLACEMENT

## RoHS COMPLIANT 515-1016F

Part Numbers with the "F" suffix ending are RoHS Compliant. Packaging is marked with "RoHS Compliant" label or equivalent markings.

## NOTES:

REV ECN NO

I. COMPONENTS MOLDED IN A CLEAR TRANSMISSIVE POLYCARBONATE (UL 94V-0 FLAMMABILITY CLASS).

**REVISIONS** 

NEW RELEASE

DRN CKD APP

KLJ NO

DATE

10-17-0

- 2. COMPONENTS DESIGNED TO BE PRESSED INTO FRONT PANEL.
- 3. RECOMMENDED LIGHT SOURCES: SMT LED (0603, 0805, AND 1206 PACKAGE SIZES)
- 4. MOUNTING HOLE SIZE:  $\emptyset$ .035 $\pm$ .002 (#65 DRILL)
- 5. DIALIGHT PART NUMBER: 515-1016F

FSCM 83330

THIS DRAWING AND THE CONTENTS HEREIN ARE CONFIDENTIAL AND THE SOLE PROPERTY OF DIALIGHT CORP. REPRODUCTION OF THIS DRAWING OR CONSTRUCTION OF ANY PARTS WITHIN THIS DRAWING ARE FORBIDDEN WITHOUT THE WRITTEN CONSENT OF DIALIGHT CORP.

SCALE: 14.000
ALL DIM's: INCH (mm)

TOLERANCES:
UNLESS OTHERWISE SPECIFIED

FRACTIONS: ±1/64
DECIMALS (.XXX): ±.01
DECIMALS (.XXXX): ±.005
DECIMALS (.XXXX): ±.005
DECIMALS (.XXXXX): ±.0005
ANGLES: ±1°

FINISH

ANGLES: ±1°

FINISH

1501 ROUTE 34 SOUTH FARMINGDALE, NJ 07727 (732) 919-3119

FAMILY TABLE: