



Ø.116<sup>+</sup>.001 [2,95<sup>+</sup>0,02]

MAJOR DIA.

## NOTES:


- I. DIALIGHT PART NUMBER: 515-1023-806F (QUAD LEVEL LP W/ 3 LIGHTSHIELDS).
- 2. COMPONENTS DESIGNED TO BE PRESSED INTO PC BOARD.
- 3. MATERIAL TO BE CLEAR, TRANSMISSIVE POLYCARBONATE (UL 94V-0 FLAMMABILITY). (LIGHTPIPE ONLY).
- 4. STORAGE AND OPERATING TEMPERATURE: -30 TO +100°C.
- 5. RECOMMENDED SURFACE MOUNT LEDS DIALIGHT PART NUMBERS:
   SINGLE COLOR: 598-80XX-107F(0603 SM PKG) OR 598-81XX-107F (0805 SM PKG)
   BI-COLOR: 598-84XX-207CF (0606 SM PKG) OR 598-86XX-207F (1210 SM PKG)

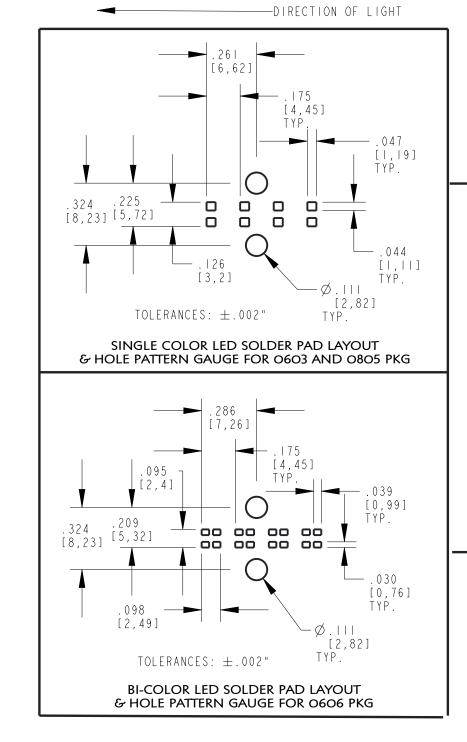

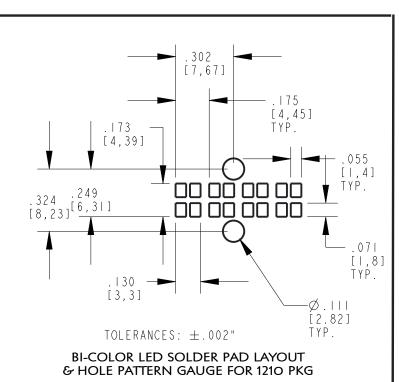

## RoHS COMPLIANT 515-1023-806F

Part Numbers with the "F" suffix ending are RoHS Compliant. Packaging is marked with "RoHS Compliant" label or equivalent markings.



THIS DRAWING AND THE CONTENTS HEREIN ARE CONFIDENTIAL AND THE SOLE PROPERTY OF DIALIGHT CORP. REPRODUCTION OF THIS DRAWING OR CONSTRUCTION OF ANY PARTS WITHIN THIS DRAWING ARE FORBIDDEN WITHOUT THE WRITTEN CONSENT OF DIALIGHT CORP.		
SCALF: 2.000	DRAWING NUMBER	REV
ALL DIM'S IN: INCHES (MM)		R
TOLERANCES: UNLESS OTHERWISE SPECIFIED	C-18198	D
FRACTIONS: ±1/64 DECIMALS (.XX): ±.01 DECIMALS (.XXX): ±.005 DECIMALS (.XXXX): ±.0005 ANGLES: ±1°	TITLE QUAD LEVEL LP W/ 3 LIGHTSHIELDS	
	MATERIAL -	
FINISH -	PARMINGDAL (732)	E 34 SOUTH E, NJ 07727 919-3119 Light.com
FSCM 83330	SHEET   OF   FAMILY TABLES:	<u> </u>