
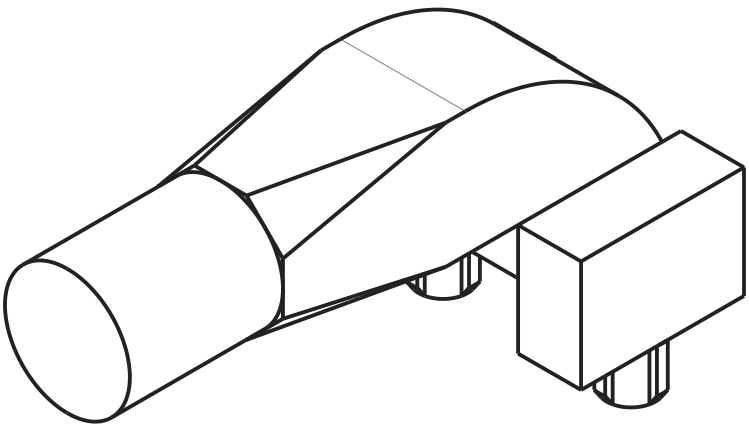
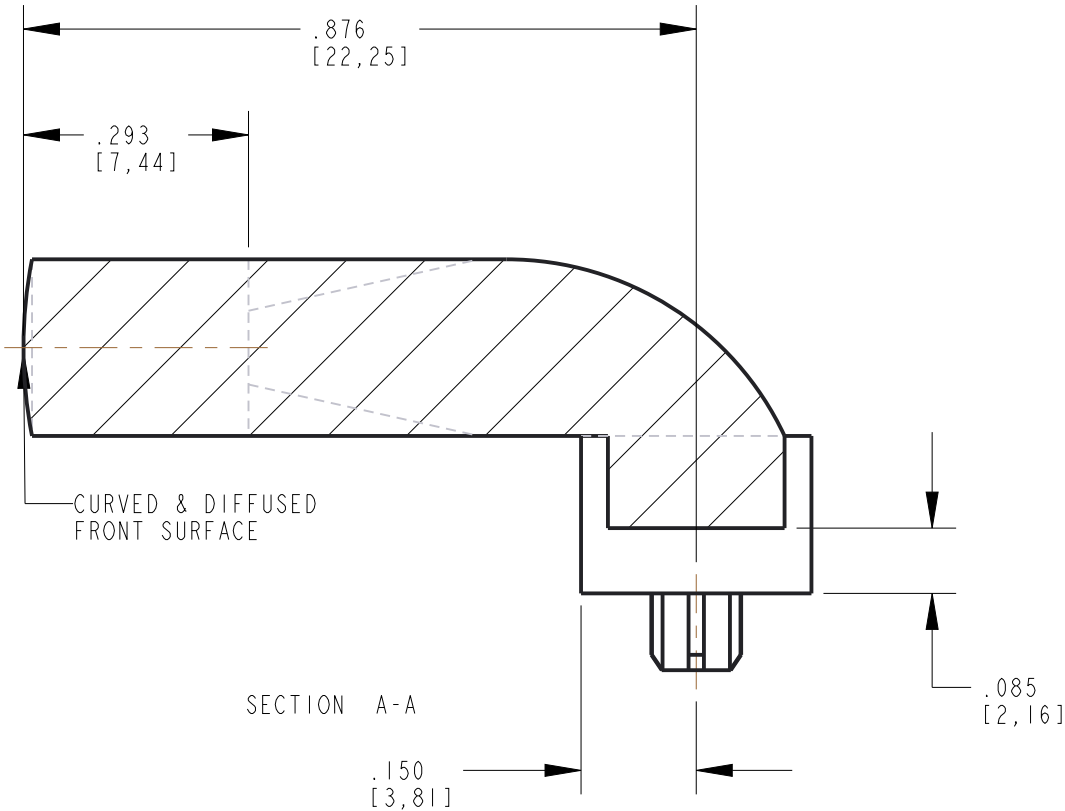



RoHS COMPLIANT 515-1038F

Part Numbers with the "F" suffix ending are RoHS Compliant.
Packaging is marked with "RoHS Compliant" label or equivalent markings.


REV	ECN NO	REVISIONS	DRN	CKD	APP	DATE
A	—	NEW RELEASE	KLJ	NO		10-16-08
B	96355	ADDED SECTION VIEW A-A & DIM .085	LD	CS		8-16-22

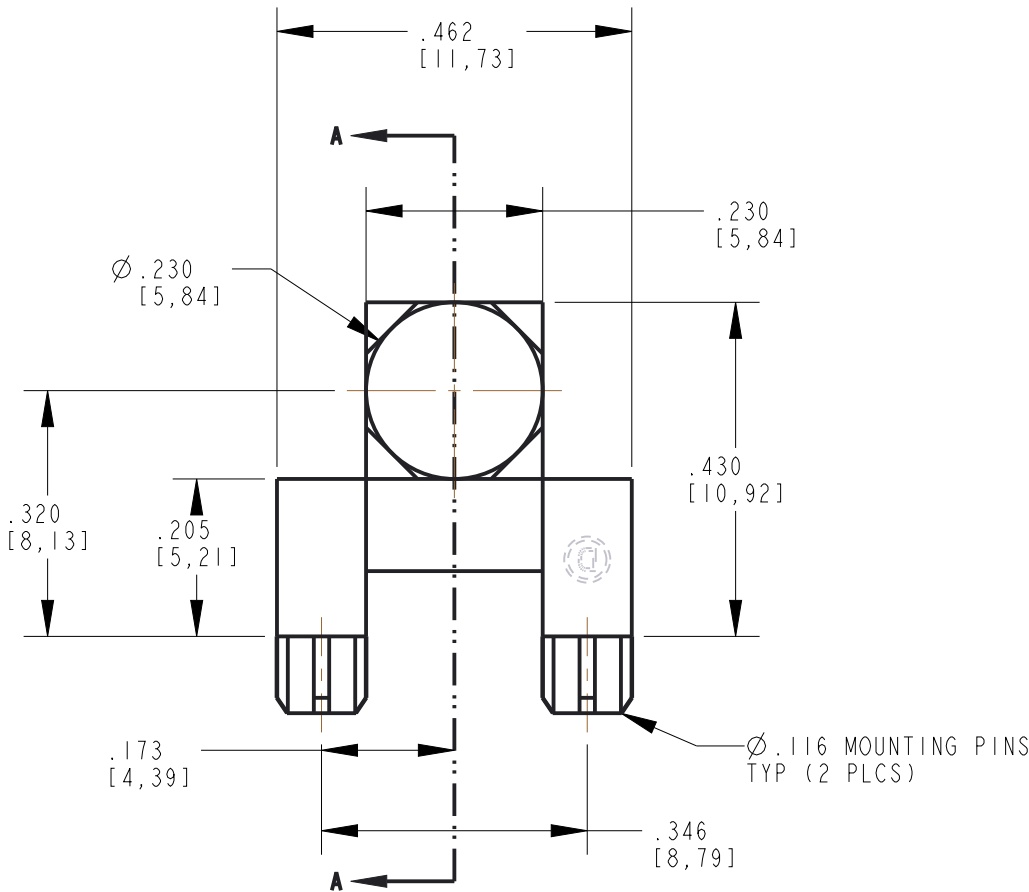

- NOTES:
- COMPONENTS MOLDED IN A CLEAR TRANSMISSIVE POLYCARBONATE (UL 94V-0 FLAMMABILITY CLASS).
 - COMPONENTS DESIGNED TO BE PRESSED INTO P.C. BOARD.
 - RECOMMENDED LIGHT SOURCES: SINGLE OR BI-COLOR SMT LEDS (DIALIGHT P/N'S: 597-3XXI-2XXF, 597-77XI-2XXF)
 - UNLESS OTHERWISE SPECIFIED, SOLDER PAD AND HOLE LAYOUT DIMENSIONS HAVE A TOLERANCE OF $\pm .005$.
 - DIALIGHT PART NUMBER: 515-1038F

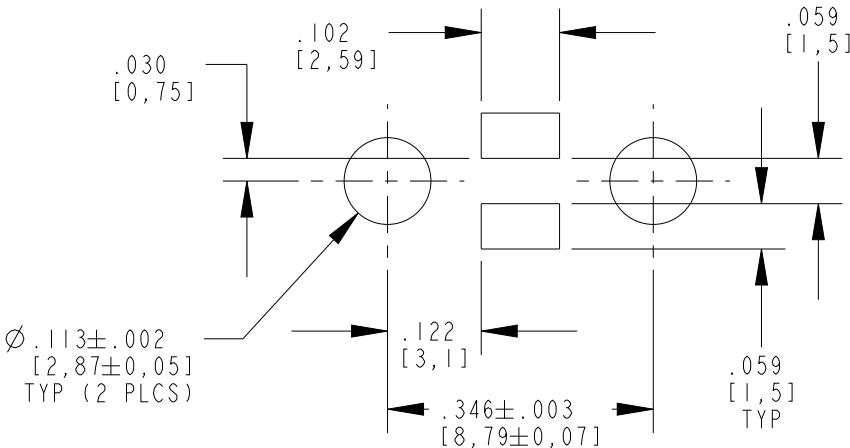

SOLDER PAD AND HOLE LAYOUT
FOR SINGLE COLOR SMT LED
(DIALIGHT P/N'S 597-3XXI-2XXF)

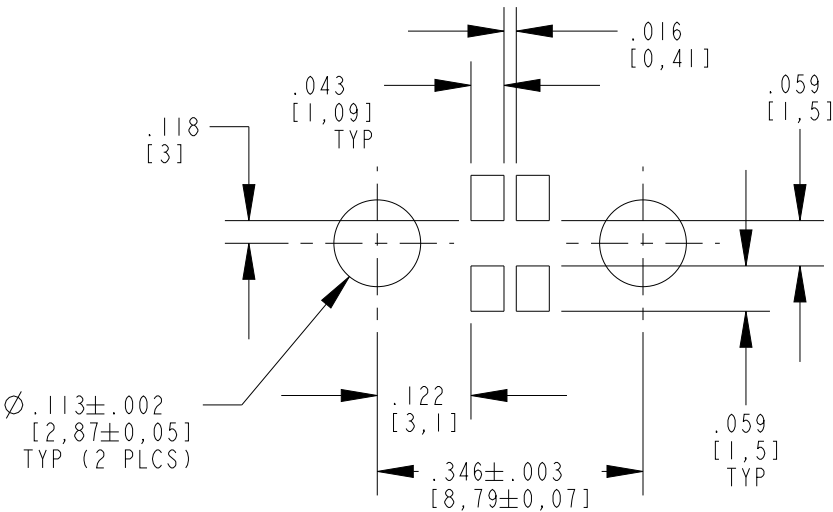

SOLDER PAD AND HOLE LAYOUT
FOR BI-COLOR SMT LED
(DIALIGHT P/N'S 597-77XI-2XXF)

THIS DRAWING AND THE CONTENTS HEREIN ARE CONFIDENTIAL AND THE SOLE PROPERTY OF DIALIGHT CORP. REPRODUCTION OF THIS DRAWING OR CONSTRUCTION OF ANY PARTS WITHIN THIS DRAWING ARE FORBIDDEN WITHOUT THE WRITTEN CONSENT OF DIALIGHT CORP.		
SCALE: 4.000	DRAWING NUMBER	REV
ALL DIM'S: INCH (mm)	C-17666	A
TOLERANCES: UNLESS OTHERWISE SPECIFIED	TITLE	
FRACTIONS: $\pm 1/64$	SINGLE ELEMENT LIGHT PIPE -	
DECIMALS (.XX): $\pm .02$	.320 ϕ HEIGHT; RoHS COMPLIANT	
DECIMALS (.XXX): $\pm .005$	MATERIAL	
ANGLES: $\pm 3^\circ$		
FINISH		
FSCM 83330		
	SHEET 1 OF 1	FAMILY TABLE:

Dialight

1501 ROUTE 34 SOUTH
FARMINGDALE, NJ 07727
(732) 919-3119
www.dialight.com