



REV	ECN NO	REVISIONS	DRN	APP	DATE
А	71907	NEW RELEASE	JGL	NO	8/18/2020

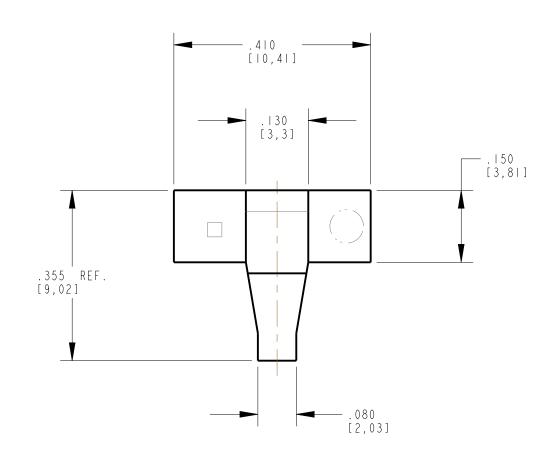

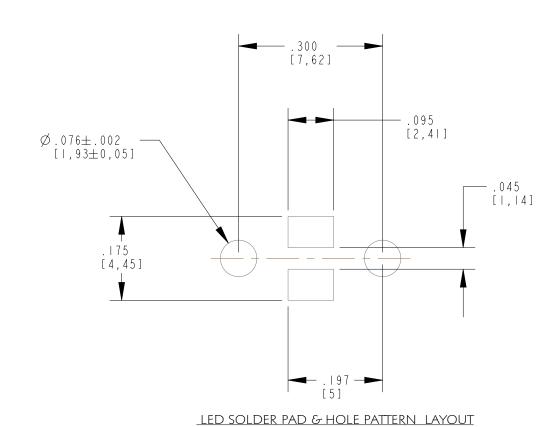

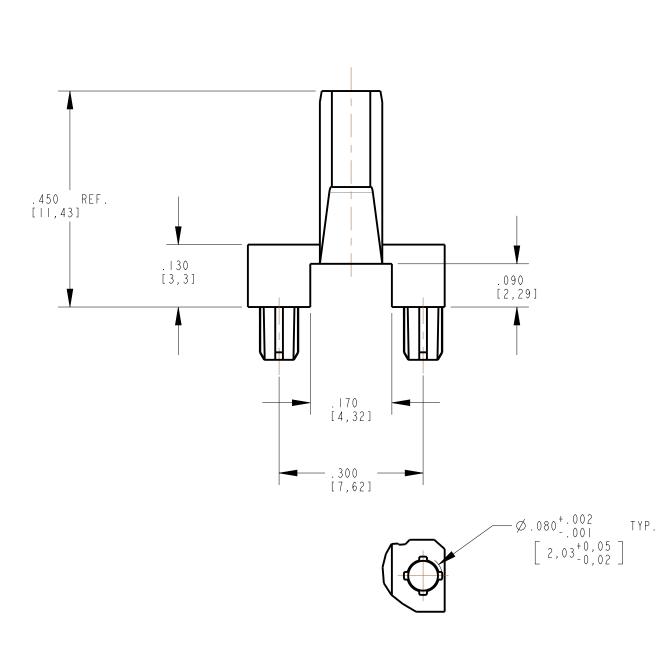

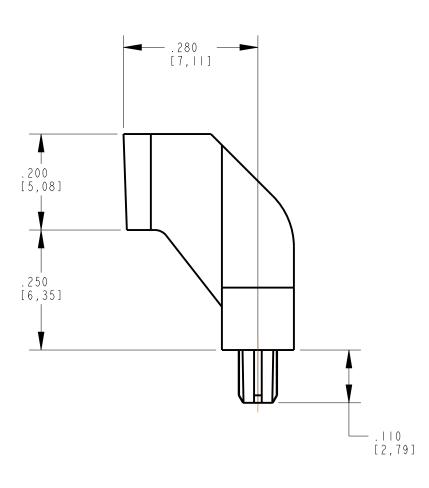


## NOTES:

- I. DIALIGHT PART NUMBER: 515-1054-801F.
- 2. COMPONENT DESIGNED TO BE PRESSED INTO PC BOARD.
- 3. MATERIAL IS CLEAR, TRANSMISSIVE POLYCARBONATE (UL 94V-0 FLAMMABILITY).
- 4. STORAGE AND OPERATING TEMPERATURE: -30 TO +100°C.
- 6. RECOMMENDED SURFACE MOUNT LEDS DIALIGHT PART NUMBERS: SINGLE COLOR: XXX-XXXX-XXXF BI-COLOR: XXX-XXXX-XXXF

RoHS COMPLIANT 515-1023-803F

Part Numbers with the "F" suffix ending are RoHS Compliant.

Packaging is marked with "RoHS Compliant" label or equivalent markings.



THIS DRAWING AND THE CONTENTS HEREIN ARE CONFIDENTIAL AND THE SOLE PROPERTY OF DIALIGHT CORP. REPRODUCTION OF THIS DRAWING OR CONSTRUCTION OF ANY PARTS WITHIN THIS DRAWING ARE FORBIDDEN WITHOUT THE WRITTEN CONSENT OF DIALIGHT CORP.						
DIALIGHT CORP I	NTERNAL REFERENCE ONLY = 3D MODEL : 5151054801F-A.3					
SCALE: 5.000	DRAWING NUMBER	REV				
ALL DIM'S IN: INCHES (MM)	C-18483	Δ				
TOLERANCES: UNLESS OTHERWISE SPECIFIED	C 10403	/ \				
FRACTIONS: ±1/64 DECIMALS (.XX): ±.01	LP SINGLE RECTANGLE .355" LG					
DECIMALS (.XXX): ±.005 DECIMALS (.XXXX): ±.0005 ANGLES: ±1°	MATERIAL -					
FINISH -	OCOT FARMINGDAL (732) S	E 34 SOUTH E, NJ 0772 019-3119 light.com				
FSCM 83330	SHEET I OF I FAMILY TABLE:					