

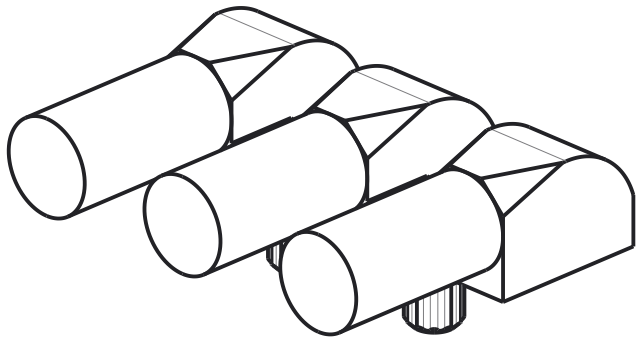
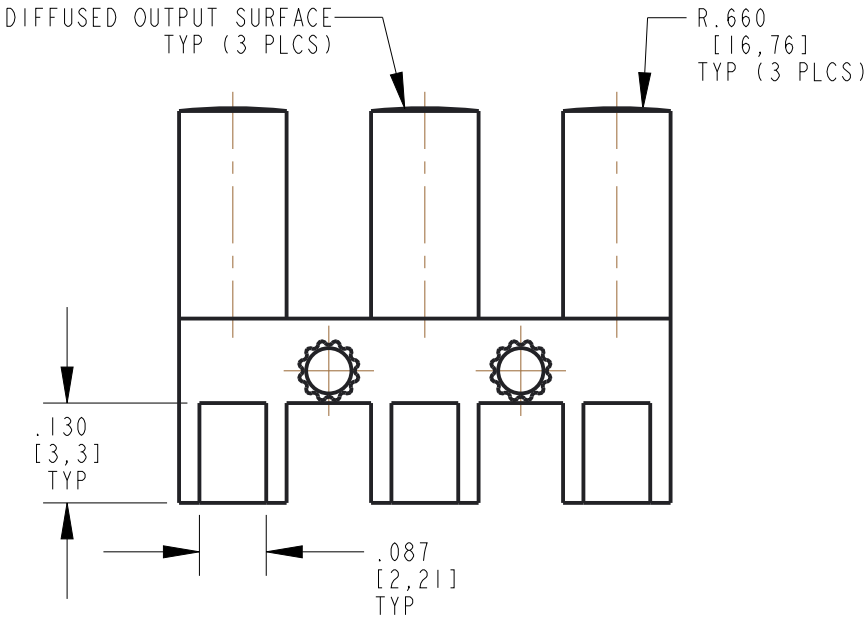
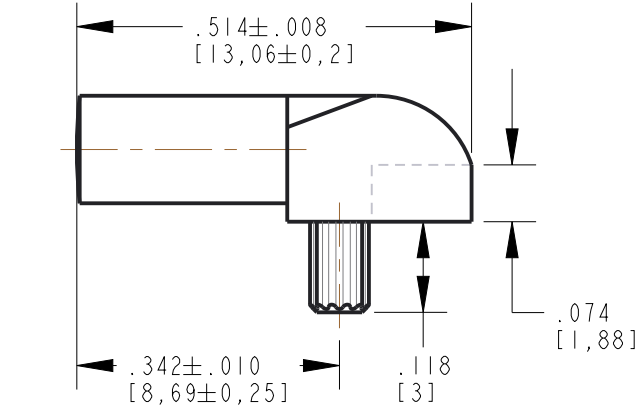


REV	ECN NO	REVISIONS	DRN	CKD	APP	DATE
A		NEW RELEASE	KLJ	ALV	N.O.	4-30-09
B	102982	ADDED NOTE 5 & HOLE DIM WAS $\varnothing .078 \pm .002$	LD		NO	5-16-23

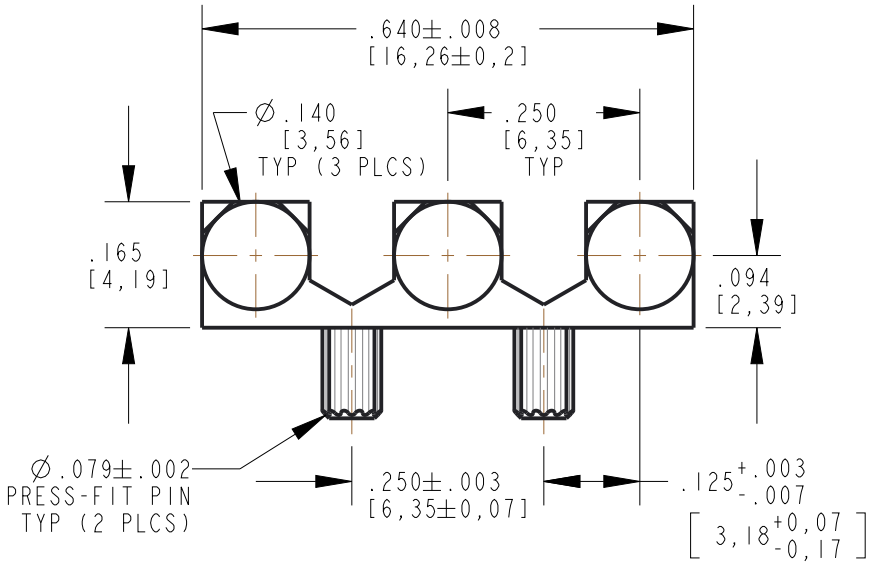

- NOTES:
- COMPONENTS MOLDED IN A CLEAR TRANSMISSIVE POLYCARBONATE (UL 94V-0 FLAMMABILITY).
 - COMPONENTS DESIGNED TO BE PRESSED INTO PC BOARD.
 - STORAGE AND OPERATING TEMPERATURE: -30°C TO 100°C
 - DIALIGHT PART NUMBER: 515-1069F
 - RECOMMENDED SURFACE MOUNT DIALIGHT LEDs: 599-04XX-127F (SINGLE COLOR)

RoHS COMPLIANT 515-1069F
Part Numbers with the "F" suffix ending are RoHS Compliant. Packaging is marked with "RoHS Compliant" label or equivalent markings.

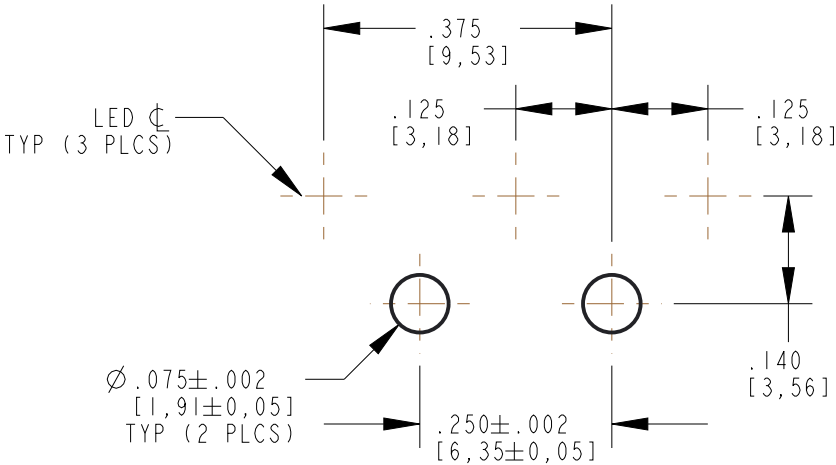

RECOMMENDED HOLE PATTERN
UNLESS OTHERWISE SPECIFIED, HOLE PATTERN TOLERANCES ARE $\pm .003$

THIS DRAWING AND THE CONTENTS HEREIN ARE CONFIDENTIAL AND THE SOLE PROPERTY OF DIALIGHT CORP. REPRODUCTION OF THIS DRAWING OR CONSTRUCTION OF ANY PARTS WITHIN THIS DRAWING ARE FORBIDDEN WITHOUT THE WRITTEN CONSENT OF DIALIGHT CORP.		
SCALE: 4.000	DRAWING NUMBER	REV
ALL DIM'S: INCH (mm)	C-17730	B
TOLERANCES: UNLESS OTHERWISE SPECIFIED	TITLE	
FRACTIONS: $\pm 1/64$	3 ELEMENT LIGHT PIPE	
DECIMALS (.XX): $\pm .01$	MATERIAL	
DECIMALS (.XXX): $\pm .005$		
ANGLES: $\pm 1^{\circ}$		
FINISH		
FSCM 83330		