


PCB MOUNTING






SWITCH FUNCTION	
POS. 1	POS. 2
ON	(ON)
2-1	2-3

(ON)=MOMENTARY



NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. CONTACT/TERMINALS: GOLD PLATED
5. RATING: 0.4VA @ 20V AC or DC MAX.
6. ELECTRICAL LIFE: 6,000 MAKE-AND-BREAK CYCLES
7. MECHANICAL LIFE: 50,000 MAKE-AND-BREAK CYCLES
8. CONTACT RESISTANCE: 20m Ω MAX. INITIAL @ 2-4VDC
100mA FOR BOTH GOLD AND SILVER CONTACTS
9. INSULATION RESISTANCE: 1,000M Ω MIN.
10. ELECTRIC STRENGTH: 1,000 V RMS @ SEA LEVEL
11. OPERATING TEMP.: -40°C to 85°C
12. ▲ DENOTES CRITICAL PARAMETER.
13. HARDWARE INCLUDED:
T100000 - HEXNUT - QTY 2
T100011 - LOCKWASHER - QTY 1
T100002 - LOCKRING - QTY 1

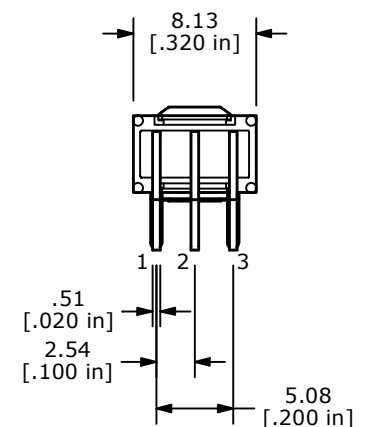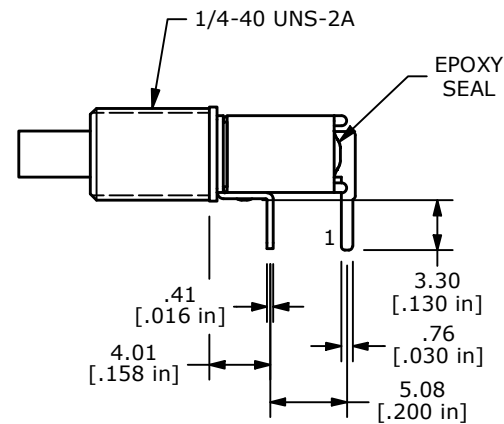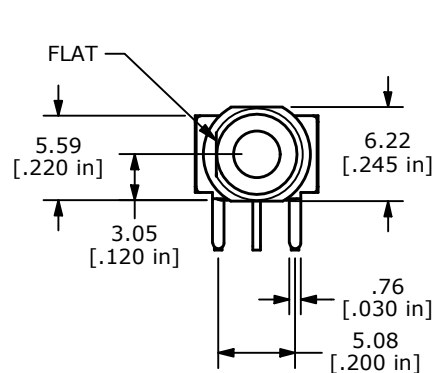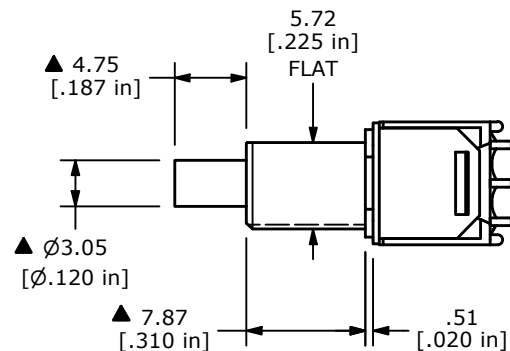

REV	ECO NO	DESCRIPTION	DATE	BY	 E-SWITCH®					OBJECT ID			
D	ECO-103159	print update	12/30/24	MW						000023415			
					TITLE 800SP8B9M6REH								
					SCALE 2:1		DATE 6/28/2007		DR TN		DWG ST822042		REV D
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED													