






RECOMMENDED PANEL CUTOUT
MAX. PANEL THICKNESS 4mm

SWITCH FUNCTION	
POS. 1	POS. 2
OFF	(ON)
OPEN	1-2

(ON) = MOMENTARY



- NOTE:
1. ALL DIMENSIONS IN MM [INCH]
 2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
 3. TERMINAL NUMBERS FOR REF ONLY
 - ▲ 4. CONTACT MATERIAL: SILVER PLATED
 5. RATING: 2A @ 36VDC
 6. ELECTRICAL LIFE: 200,000 CYCLES
 7. CONTACT RESISTANCE: 50 m Ω MAX. @ 1A 12VDC (INITIAL)
 8. INSULATION RESISTANCE: 1,000 M Ω MIN. @ 500VDC
 9. DIELECTRIC STRENGTH: 2,000 VAC rms.
 10. OPERATING TEMPERATURE: -40°C to +85°C
 11. PANEL THICKNESS MAX: 4.0mm
 12. INGRESS PROTECTION: IP65
 13. ▲ DENOTES CRITICAL PARAMETER.
 - ▲ 14. HARDWARE INCLUDED: O-RING and HEXNUT (NOT SHOWN)

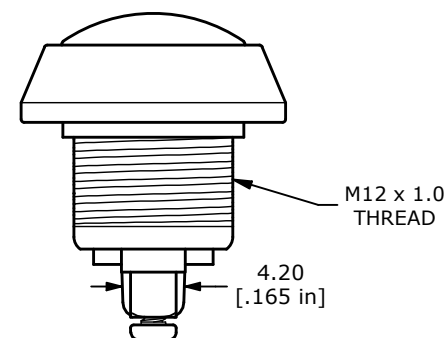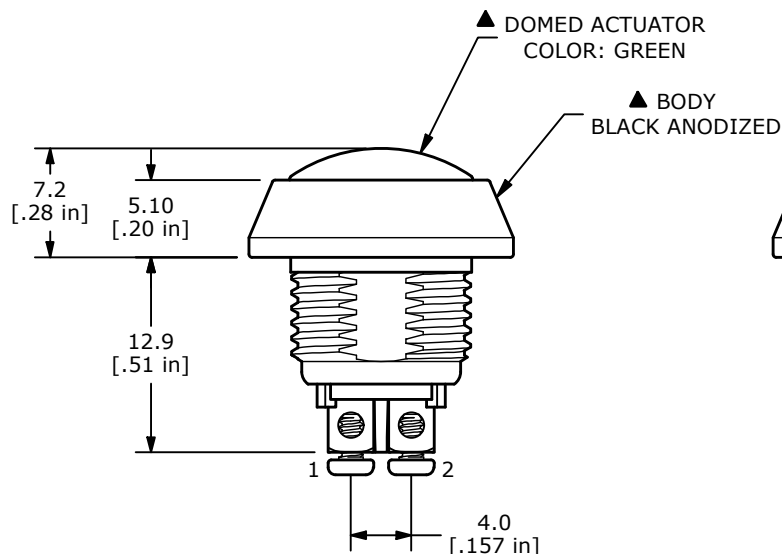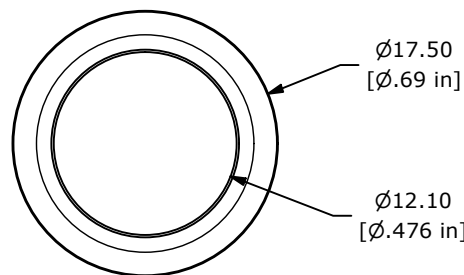

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
C	ECO-103080	print update	11/12/24	MW	TITLE PV5S64018				000002812
					SCALE 2:1	DATE 8/5/2009	DR CAB	DWG 52-PV5S64018	REV C

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED