



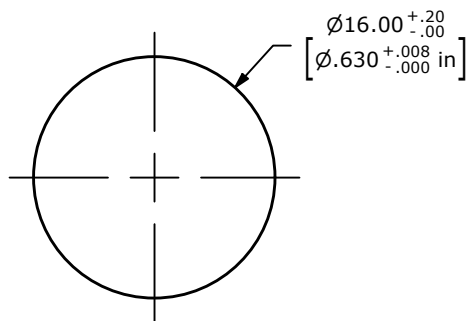


RECOMMENDED PANEL CUTOUT
 MAX. PANEL THICKNESS 10mm

- ○ ○ ○ ○ +
 ▲ LAMP INDICATOR
CONTACT CONFIGURATION

NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
 X.XX = ± 0.25
3. OPERATING TEMP.: -40°C to 85°C
4. ▲ DENOTES CRITICAL PARAMETER.
5. ILLUMINATION COLOR: GREEN
6. ILLUMINATION BASE RATING: 2.8V
7. HARDWARE SUPPLIED: O-RING AND HEXNUT (NOT SHOWN)
8. INGRESS PROTECTION: IP65

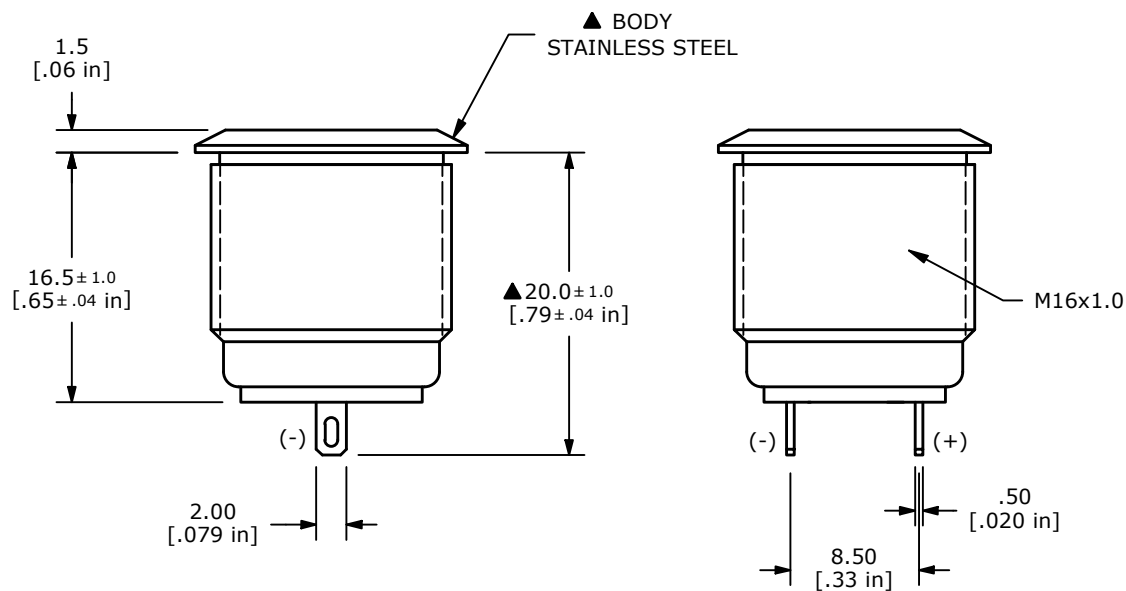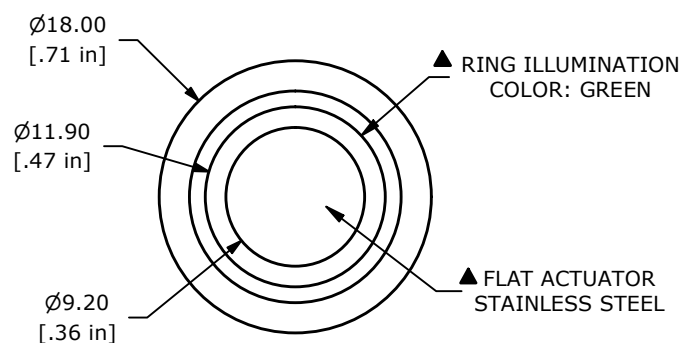

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
B	ECO-103484	PRINT UPDATE	06/27/25	JS	TITLE PV6F2PXSS-331				000002897
					SCALE	DATE	DR	DWG	REV
					2:1	11/4/2015	MW	52-PV6F2PXSS331	B

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO
 E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED